

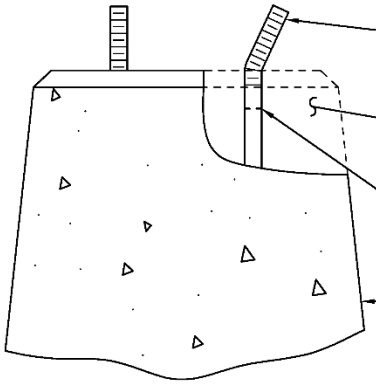



STEP 1

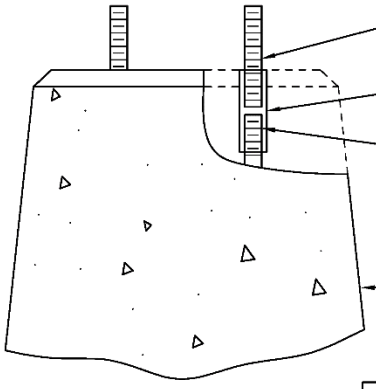

STEP 2

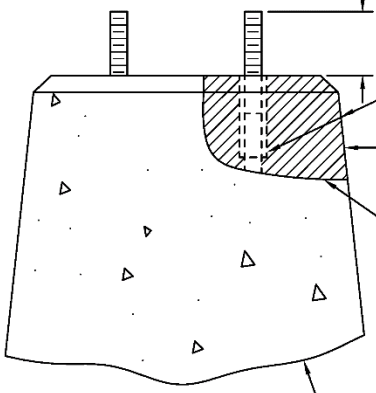

STEP 3

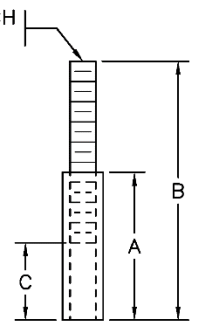

COUPLER DETAIL

ANCHOR BOLT COUPLERS			
ANCHOR BOLTS	A	B	C
1"ø	125	205	62
1 1/4"ø	125	205	62
1 1/2"ø	125	265	62
1"ø (DYWIDAG)	150	310	75

ALL COUPLERS SHALL HAVE A MINIMUM OF 125% OF THE SPECIFIED ANCHOR BOLT YIELD STRENGTH

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635-1.1.43 FOR ADDITIONAL INFORMATION.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	NEW DRAWING NUMBER - PREVIOUSLY NUMBERED 1.1.43	FEB 16
B	MINISTRY ELECTRICAL REPRESENTATIVE ADDED	OCT 03
A	DRAWING NUMBER CHANGED	AUG 95

ANCHOR BOLT REPAIR PROCEDURES


Date Approved

05/02/16 D.N. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.1.44

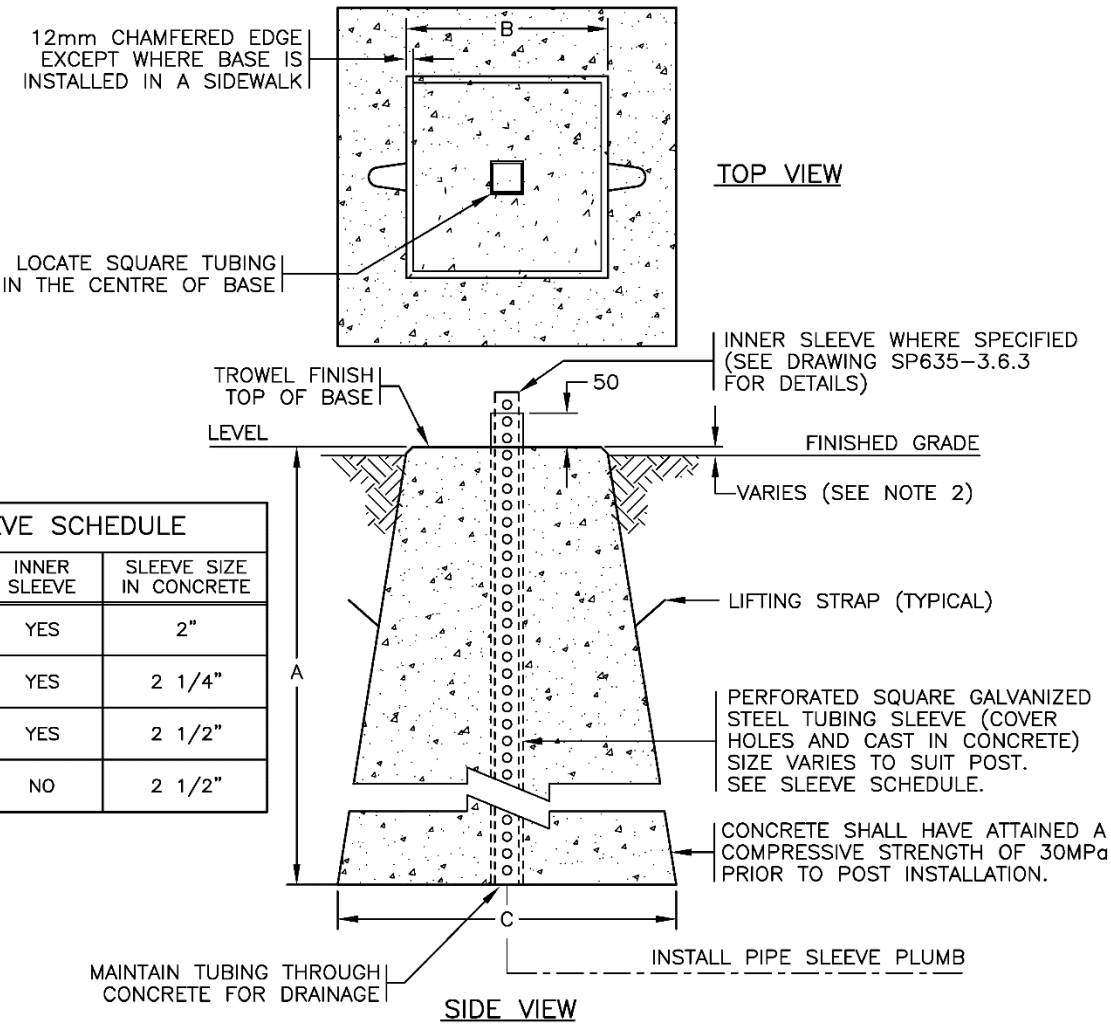

SLEEVE SCHEDULE		
POST O.D.	INNER SLEEVE	SLEEVE SIZE IN CONCRETE
1 1/2"	YES	2"
1 3/4"	YES	2 1/4"
2"	YES	2 1/2"
2 1/4"	NO	2 1/2"

BASE TYPE	APPLICATION	APPROXIMATE MASS	VOLUME OF CONCRETE	A	B	C
a	SINGLE POST SIGNS IN PAVED ISLANDS OR CONCRETE SIDEWALKS	34 kg	0.015 m^3	400	160	230
b	SINGLE OR TWO POST SIGNS IN GRAVEL SHOULDER UP TO 1.0 x 1.2m	166 kg	0.068 m^3	470	300	460
c	TWO POST SIGNS IN GRAVEL SHOULDER UP TO 1.0 x 1.2m $\leq$ 1.2 x 2.4m	390 kg	0.16 m^3	750	330	600

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BASE SHALL BE INSTALLED 25mm ABOVE FINISHED GRADE EXCEPT WHERE INSTALLED IN SIDEWALK IT SHALL BE FLUSH WITH TOP OF SIDEWALK WITH NO CHAMFERED EDGE.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE


BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	GENERAL REVISIONS	APR 20
B	GENERAL REVISIONS	APR 17
A	NEW DRAWING NUMBER - PREVIOUSLY NUMBERED 1.1.44	FEB 16

TRAPEZOIDAL CONCRETE BASES FOR PERFORATED SQUARE STEEL SIGN POSTS (PRECAST OR CAST IN PLACE)

Date Approved: **05/02/16** **D.N. (Signature on File)** Chief Engineer

SPECIFICATION DRAWING No. SP635-1.1.45

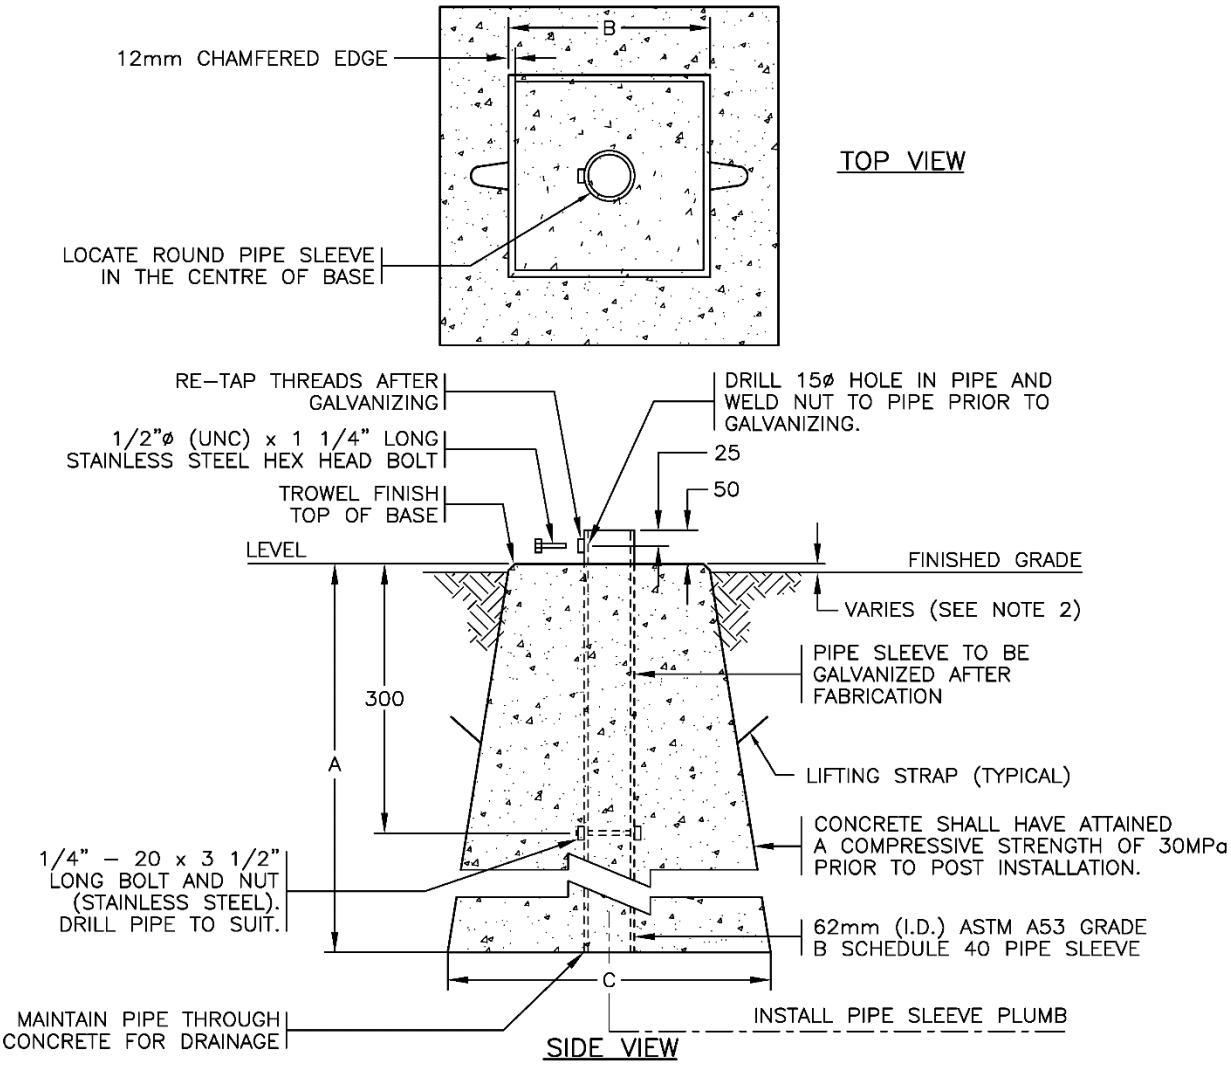

BASE TYPE	APPLICATION	APPROXIMATE MASS	VOLUME OF CONCRETE	A	B	C
a	SINGLE POST SIGNS IN PAVED ISLANDS OR CONCRETE SIDEWALKS	34 kg	0.015 m^3	400	160	230
b	SINGLE OR TWO POST SIGNS IN GRAVEL SHOULDER UP TO 1.0 x 1.2m	166 kg	0.068 m^3	470	300	460
c	TWO POST SIGNS IN GRAVEL SHOULDER UP TO 1.0 x 1.2m $\leq$ 1.2 x 2.4m	390 kg	0.16 m^3	750	330	600

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BASE SHALL BE INSTALLED 25mm ABOVE FINISHED GRADE EXCEPT WHERE INSTALLED IN SIDEWALK IT SHALL BE FLUSH WITH TOP OF SIDEWALK WITH NO CHAMFERED EDGE.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	TITLE UPDATED	APR 20
B	GENERAL REVISIONS	APR 17
A	NEW DRAWING NUMBER - PREVIOUSLY NUMBERED 1.1.45	FEB 16

TRAPEZOIDAL CONCRETE BASE FOR ROUND STEEL SIGN POST (PRECAST OR CAST IN PLACE)


Date Approved

05/02/16 D.N. (Signature on File)

Chief Engineer

SPECIFICATION DRAWING No.

SP635-1.1.46

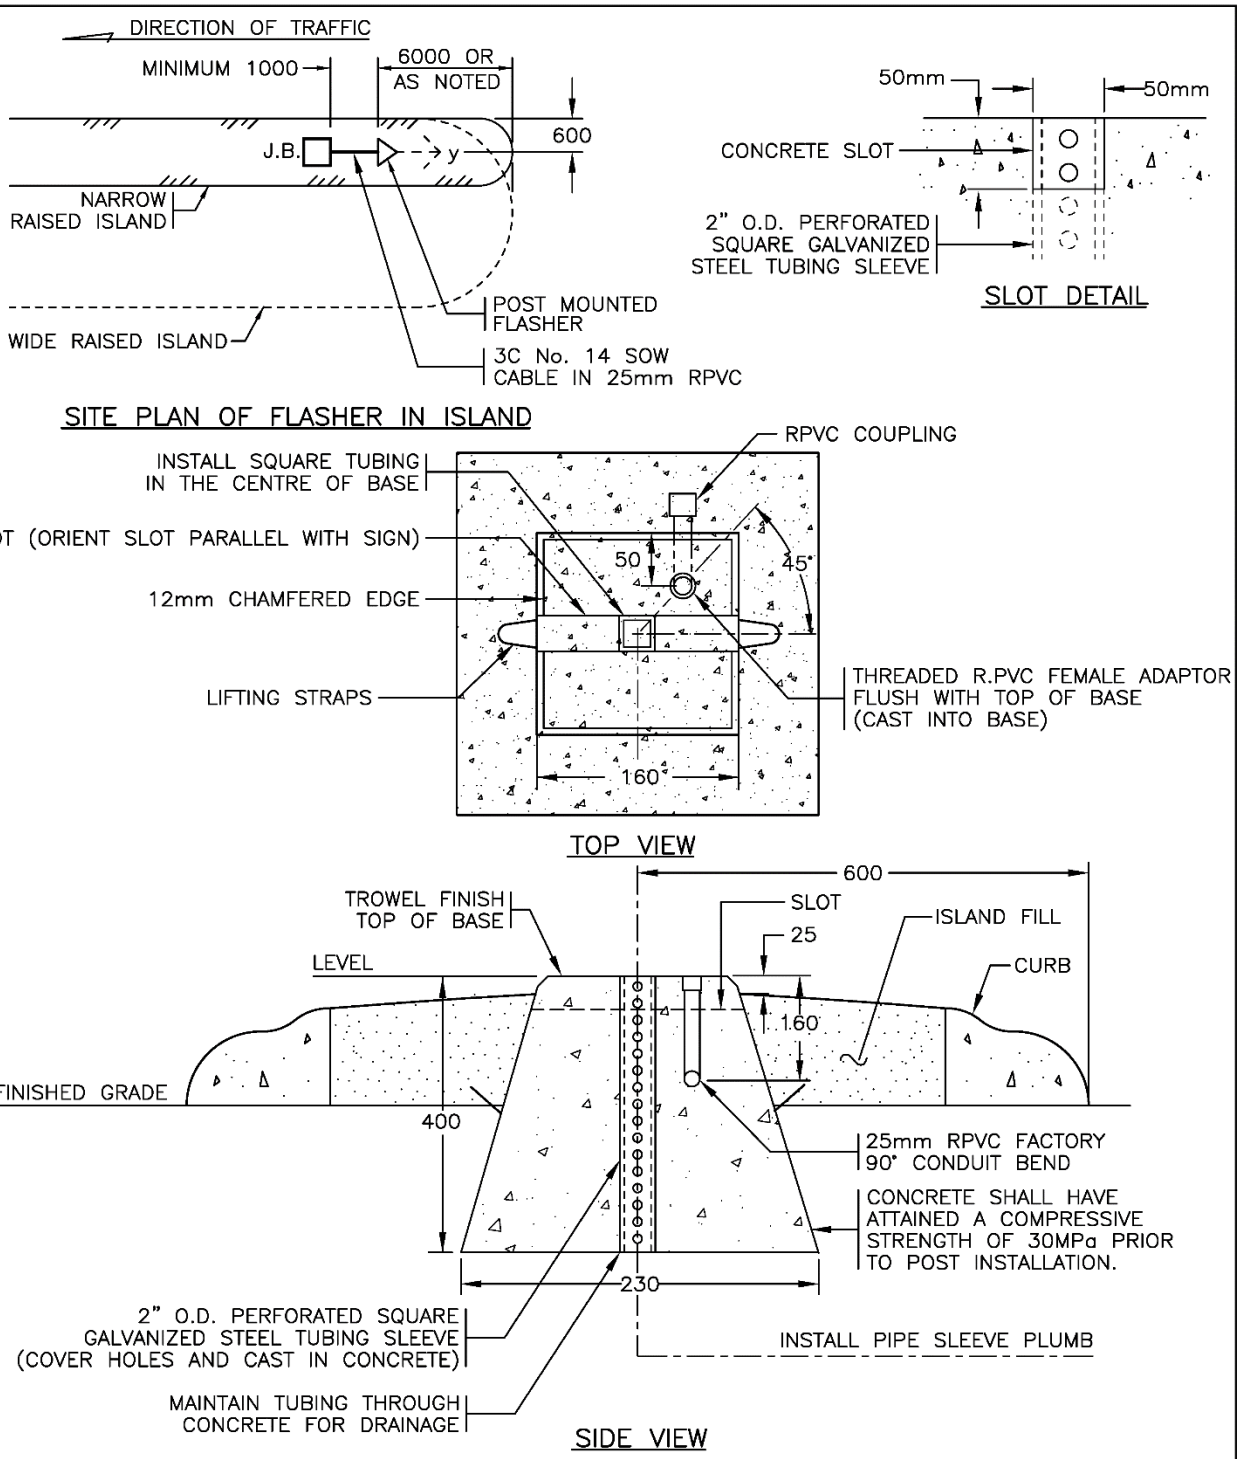

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	GENERAL REVISIONS	APR 20
B	GENERAL REVISIONS	APR 17
A	NEW DRAWING NUMBER – PREVIOUSLY NUMBERED 1.1.46	FEB 16

TRAPEZOIDAL POST MOUNTED FLASHER CONCRETE BASE (PRECAST OR CAST IN PLACE)

Date Approved


05/02/16 D.N. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.1.47

NUMBER OF CONDUITS ENTERING JUNCTION BOX NOT TO EXCEED 10 (UNLESS OTHERWISE NOTED)

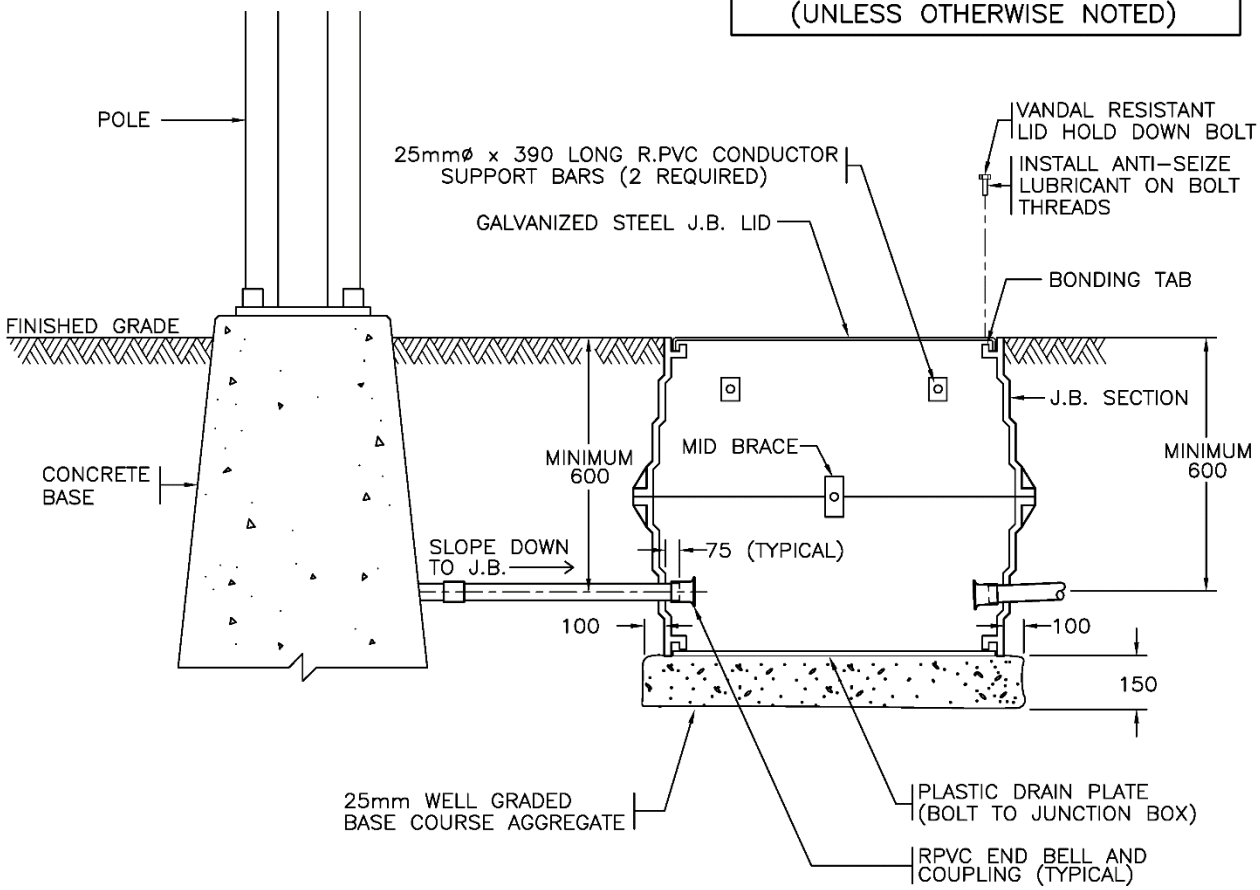

TYPE 6 JUNCTION BOX

TWO J.B. SECTIONS
ONE LID
ONE MID BRACE
ONE DRAIN PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. PLACE LID ON BOX & MID BRACE INSIDE BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

TYPE 6 RECTANGULAR PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved


30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.2.1

NUMBER OF CONDUITS ENTERING JUNCTION BOX NOT TO EXCEED 10 (UNLESS OTHERWISE NOTED)

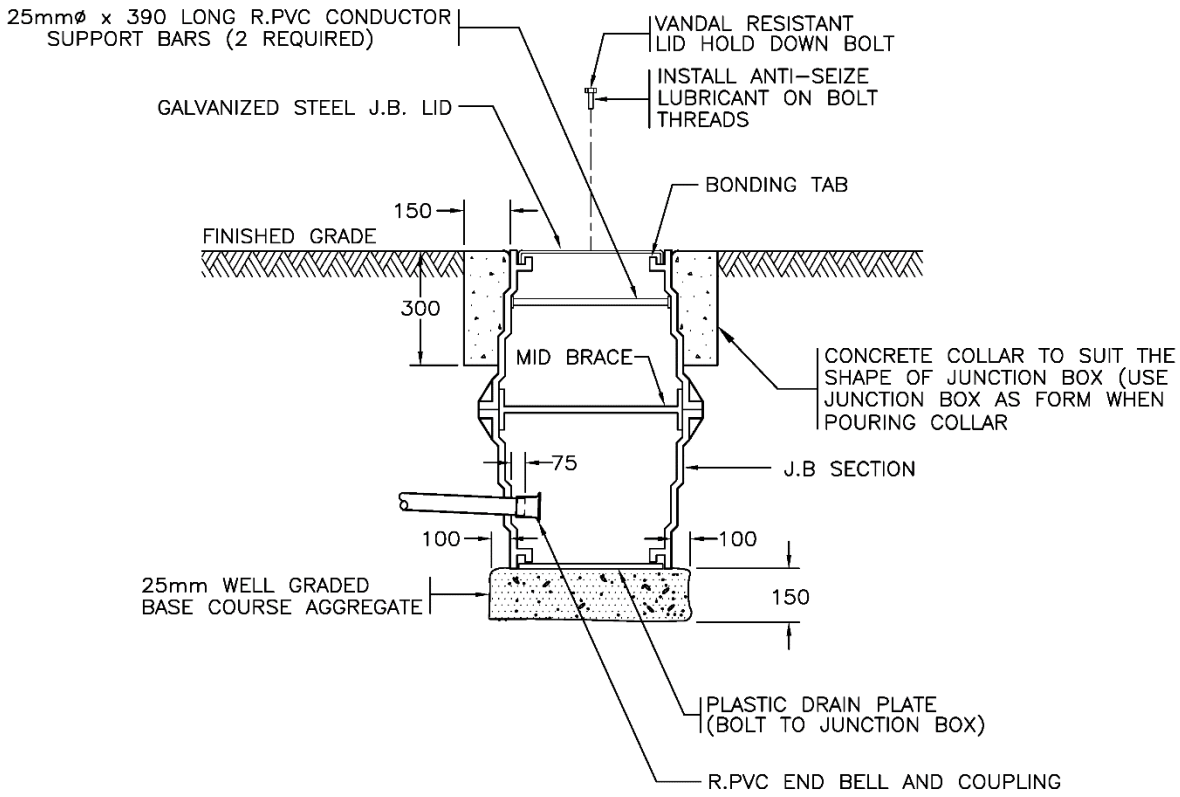

* TYPE 6 'SPECIAL' JUNCTION BOX

TWO J.B. SECTIONS
ONE LID
ONE MID BRACE
ONE DRAIN PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. PLACE LID ON BOX & MID BRACE INSIDE BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

DENOTED AS 6* ON DRAWINGS

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94


TYPE 6 'SPECIAL' RECTANGULAR PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved

30/09/93 E.L. **(Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.2

NUMBER OF CONDUITS ENTERING JUNCTION BOX NOT TO EXCEED 10 (UNLESS OTHERWISE NOTED)

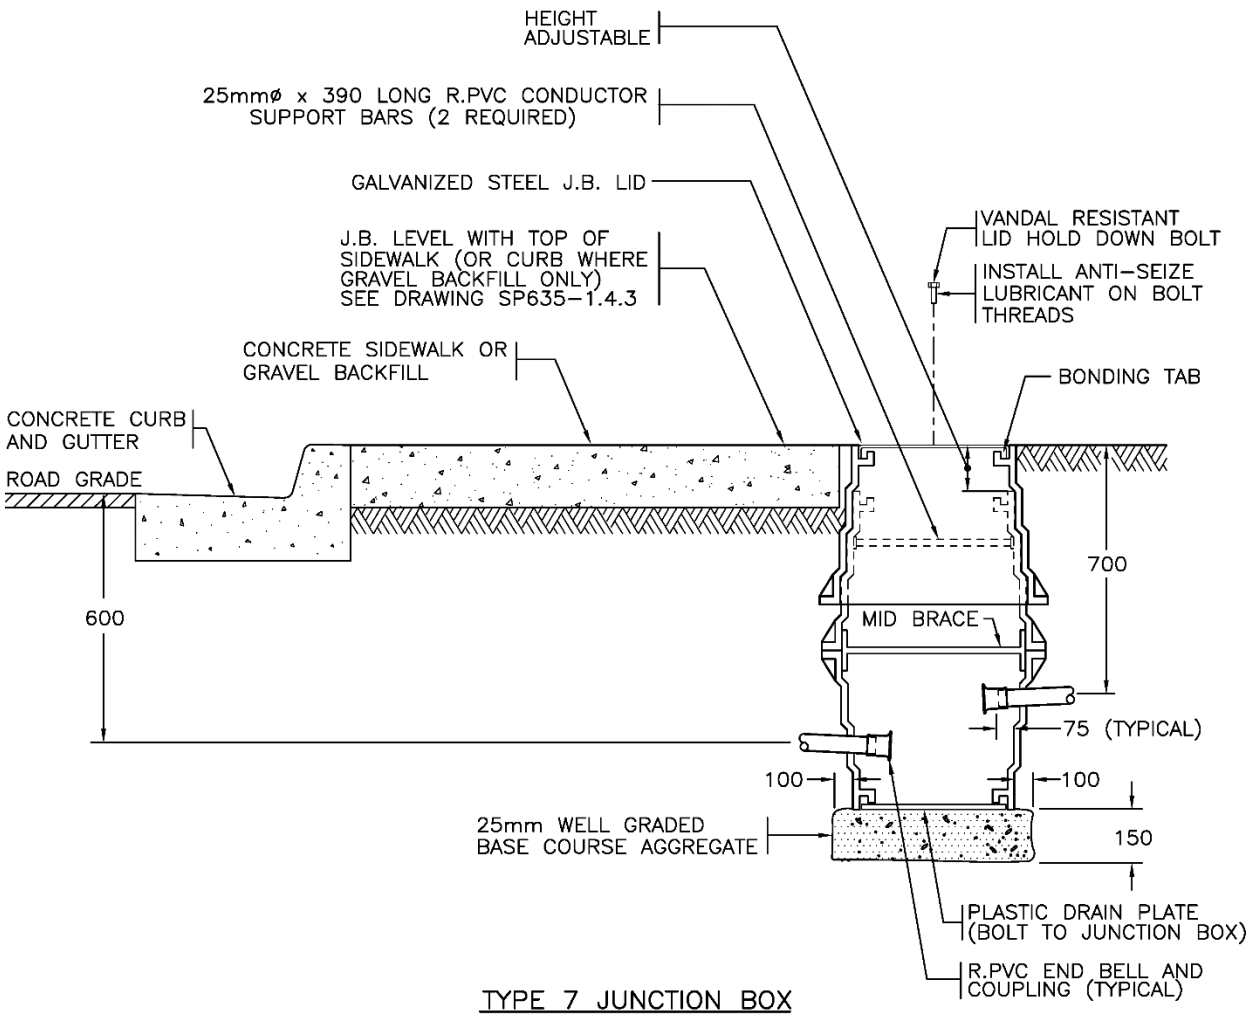

TYPE 7 JUNCTION BOX

THREE JUNCTION BOX SECTIONS
ONE LID
ONE MID BRACE
ONE DRAIN PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. PLACE LID ON BOX & MID BRACE INSIDE BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE


No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

TYPE 7 RECTANGULAR PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved
30/09/93 E.L. **(Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.3

NUMBER OF CONDUITS ENTERING JUNCTION BOX NOT TO EXCEED 10 (UNLESS OTHERWISE NOTED)

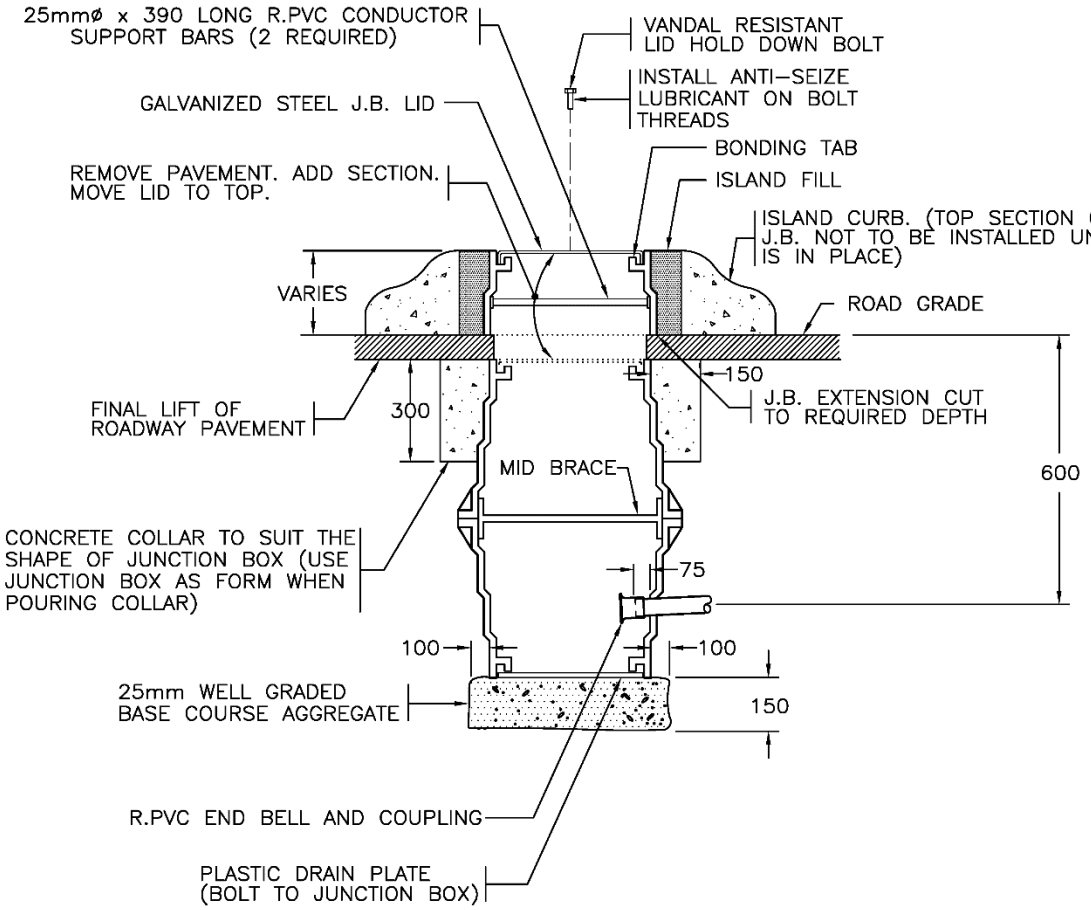

TYPE 8 JUNCTION BOX

THREE JUNCTION BOX SECTIONS
ONE LID
ONE MID BRACE
ONE DRAIN PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. PLACE LID ON BOX & MID BRACE INSIDE BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

TYPE 8 RECTANGULAR PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved
30/09/93 E.L. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.4

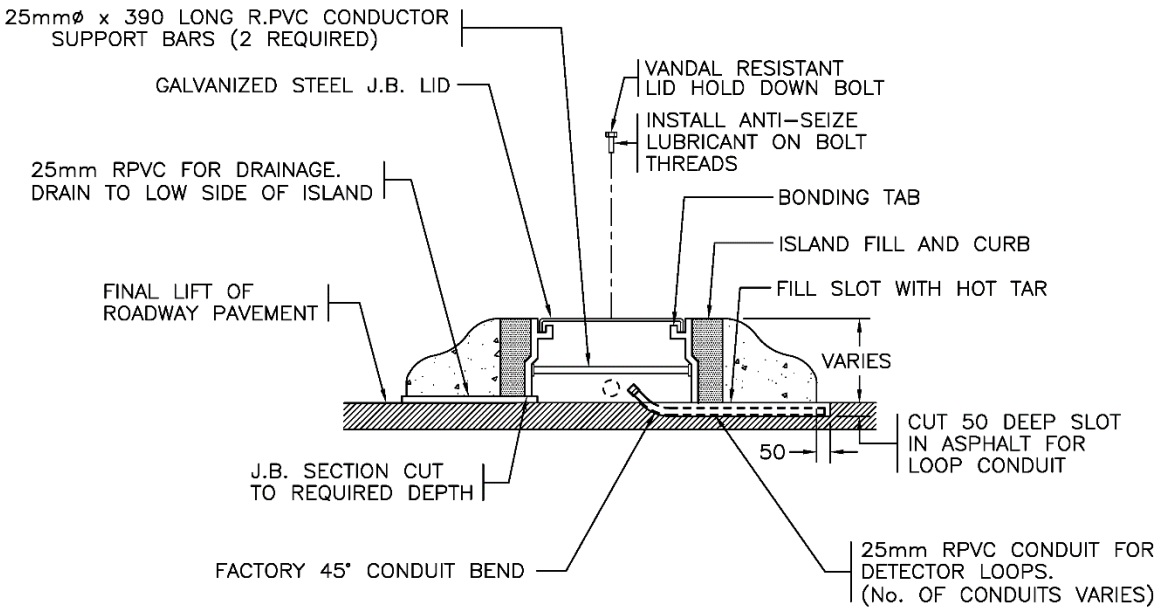

TYPE 9 JUNCTION BOX

ONE JUNCTION BOX SECTION
ONE LID

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. PLACE LID ON BOX & MID BRACE INSIDE BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

TYPE 9 RECTANGULAR PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved
30/09/93 E.L. **(Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.5

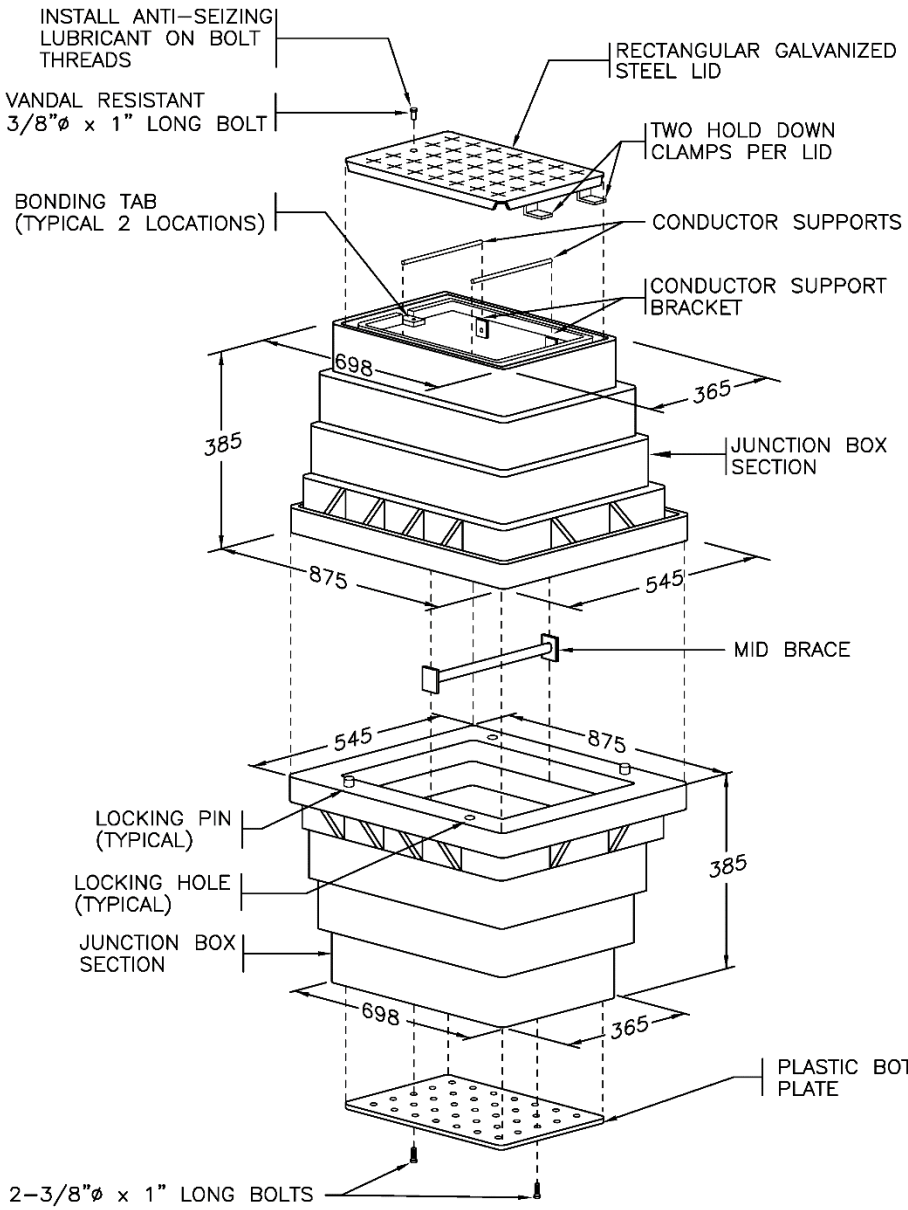

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. PLACE LID ON BOX & MID BRACE INSIDE BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635–1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 17
C	ANTI–SEIZING LUBRICANT NOTED	NOV 98
B	LID STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

RECTANGULAR PLASTIC JUNCTION BOX DETAILS

Date Approved


30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.2.6

NUMBER OF CONDUITS ENTERING JUNCTION BOX NOT TO EXCEED 10 (UNLESS OTHERWISE NOTED)

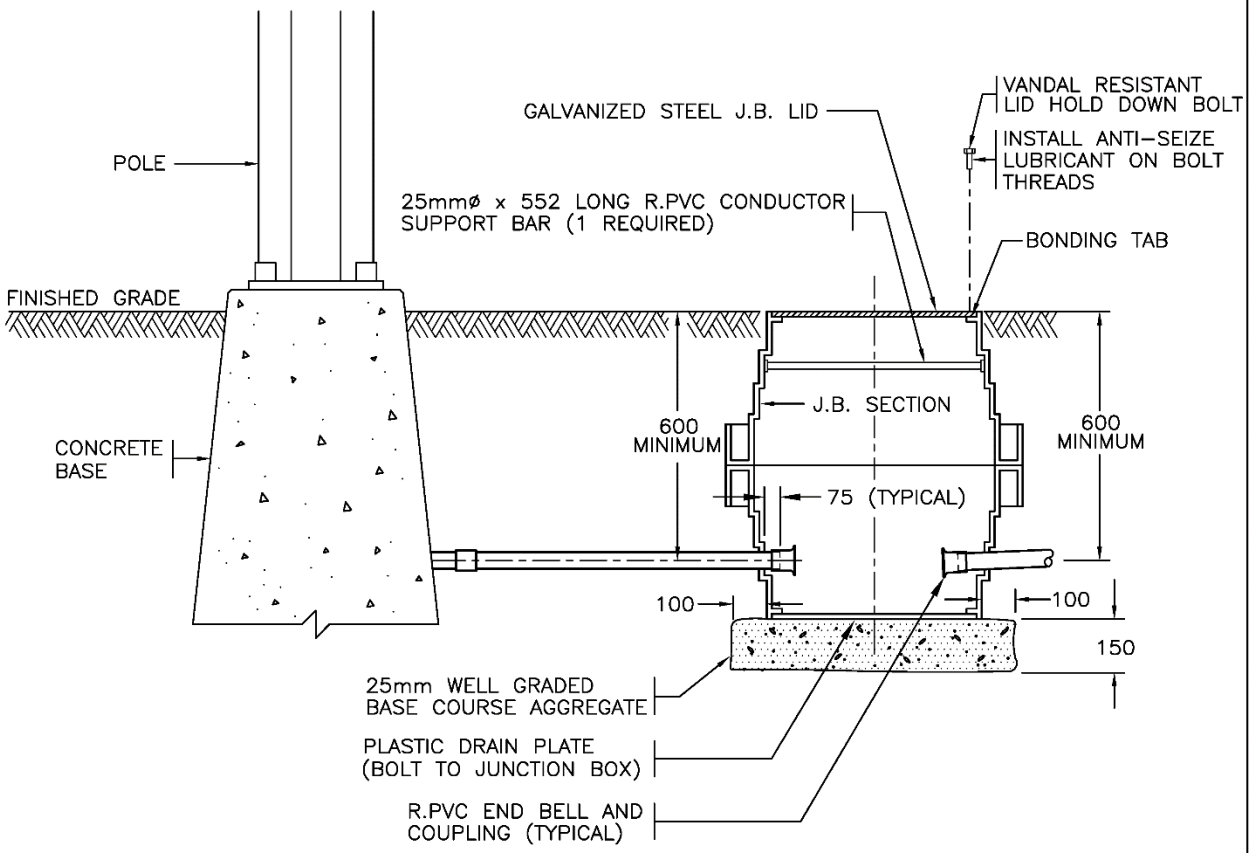

TYPE 10 JUNCTION BOX

TWO J.B. SECTIONS
ONE PLASTIC LID OR ONE STEEL LID
ONE DRAIN PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BOLT DOWN LID ON BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID & DRAIN PLATE STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

TYPE 10 ROUND
PLASTIC JUNCTION BOX INSTALLATION DETAILS


Date Approved
30/09/93 E.L. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.7

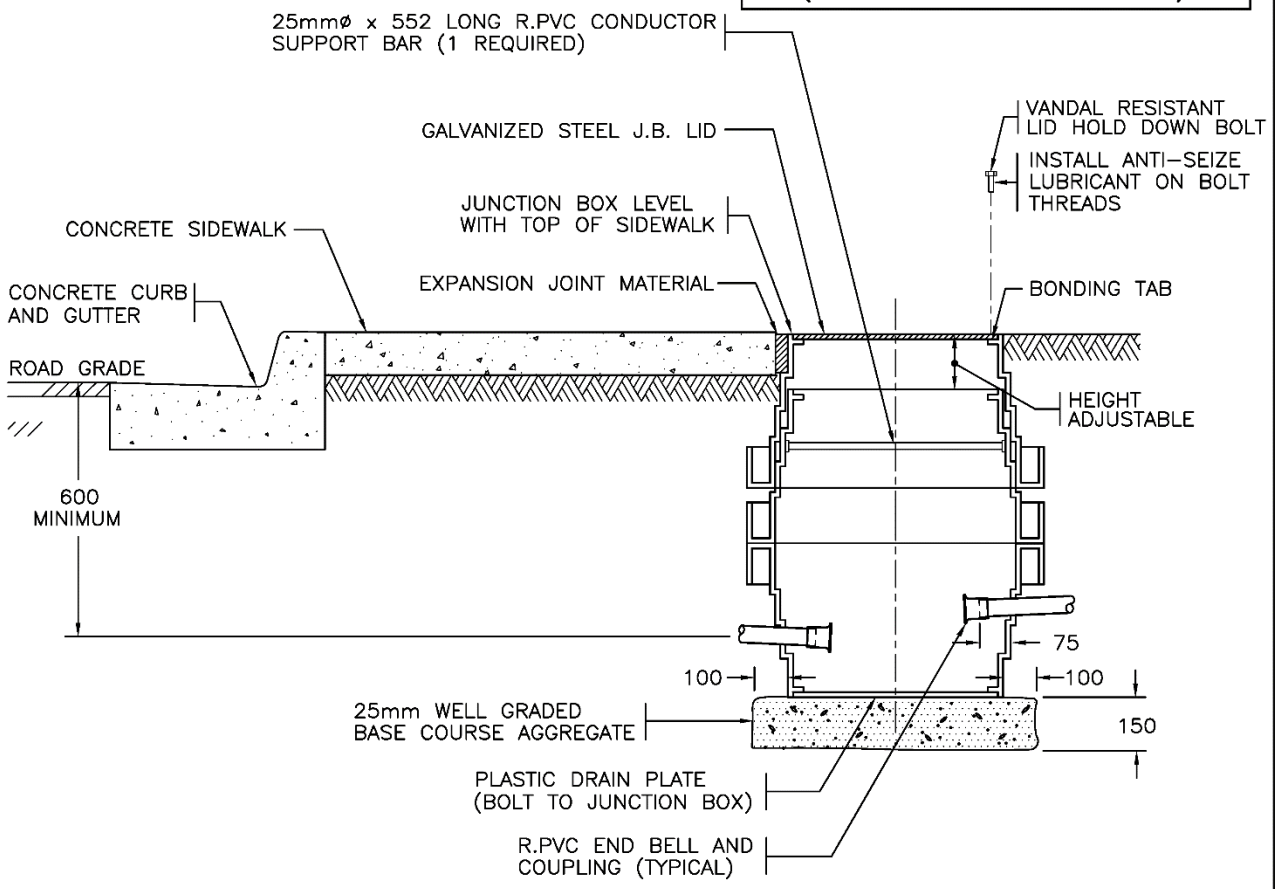

TYPE 11 JUNCTION BOX

THREE JUNCTION BOX SECTIONS
ONE STEEL LID
ONE DRAIN PLATE

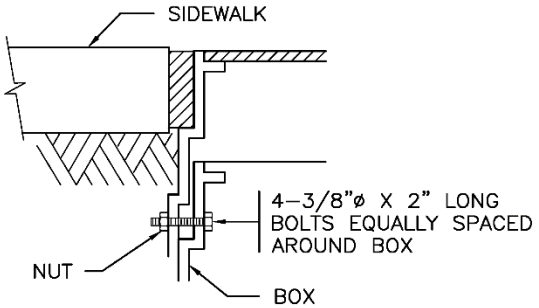

JUNCTION BOX IN SIDEWALK

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BOLT DOWN LID ON BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
F	GENERAL REVISIONS	APR 17
E	DETAIL REVISED	APR 05
D	DETAIL ADDED	OCT 03
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID & DRAIN PLATE STOCK NUMBER REVISED	AUG 96

TYPE 11 ROUND PLASTIC JUNCTION BOX INSTALLATION DETAILS


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.2.8

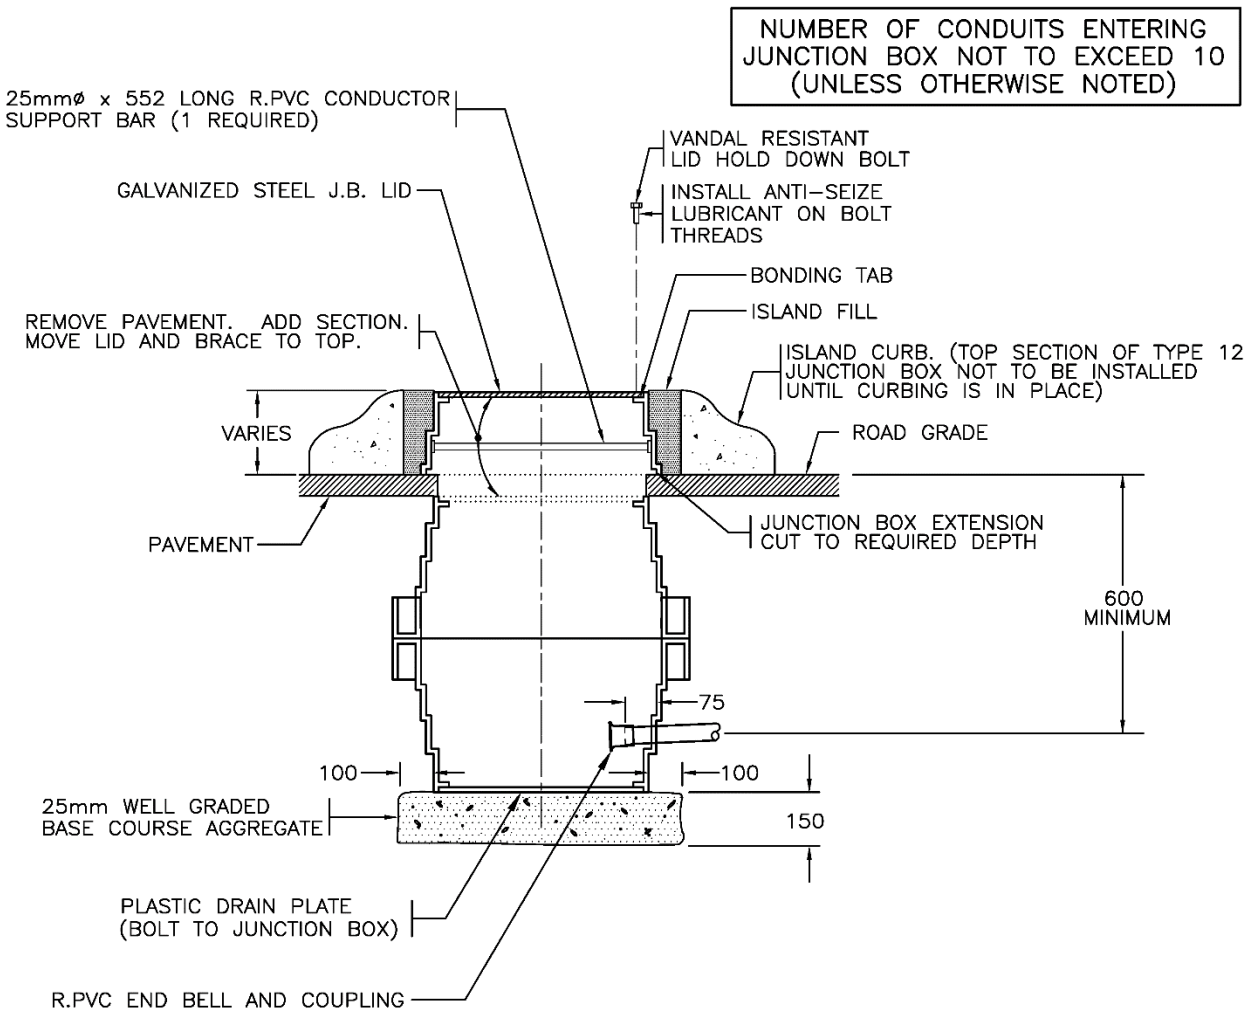

TYPE 12 JUNCTION BOX

THREE JUNCTION BOX SECTIONS
ONE STEEL LID
ONE DRAIN PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BOLT DOWN LID ON BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	LID & DRAIN PLATE STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

TYPE 12 ROUND
PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved
30/09/93 E.L. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.9

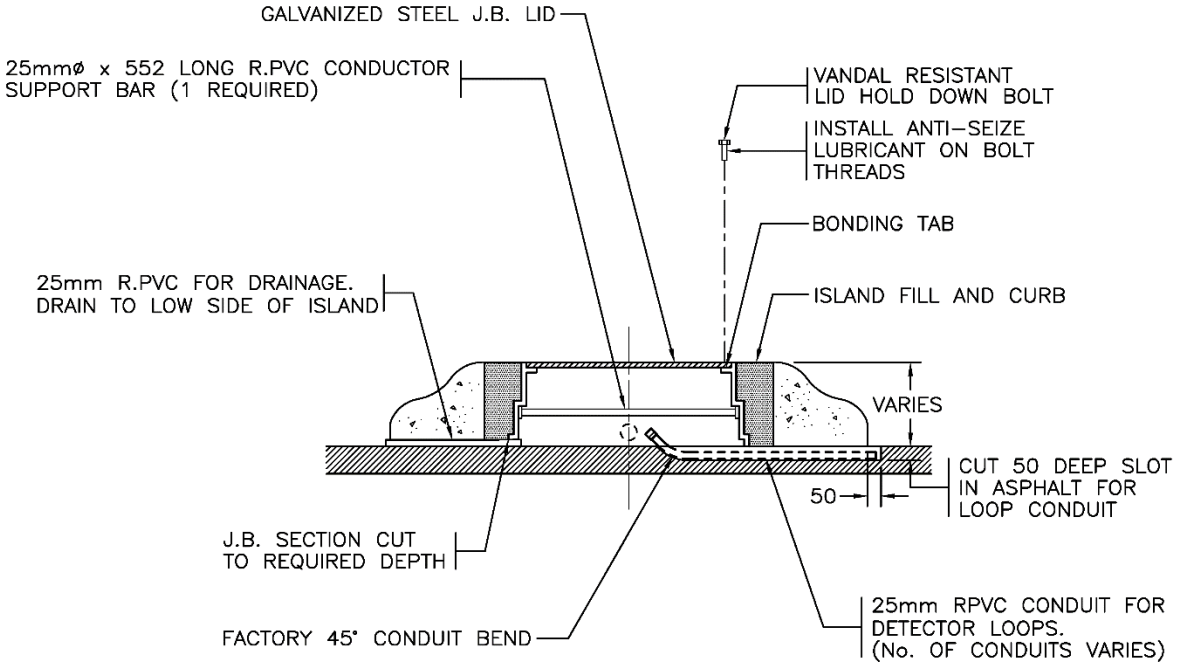

TYPE 13 JUNCTION BOX

ONE JUNCTION BOX SECTION
ONE STEEL LID

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BOLT DOWN LID ON BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. SEE DRAWINGS SP635-1.4.1, 1.4.2 & 1.4.3 FOR J.B. INSTALLATION DETAILS.
4. ALL CONDUITS SHALL DRAIN TO J.B.'S
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
E	GENERAL REVISIONS	APR 17
D	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
C	STEEL LID STOCK NUMBER REVISED	AUG 96
B	STEEL LID TYPE NOTE CHANGED	AUG 95
A	GENERAL REVISIONS	AUG 94

TYPE 13 ROUND
PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved
30/09/93 E.L. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.10

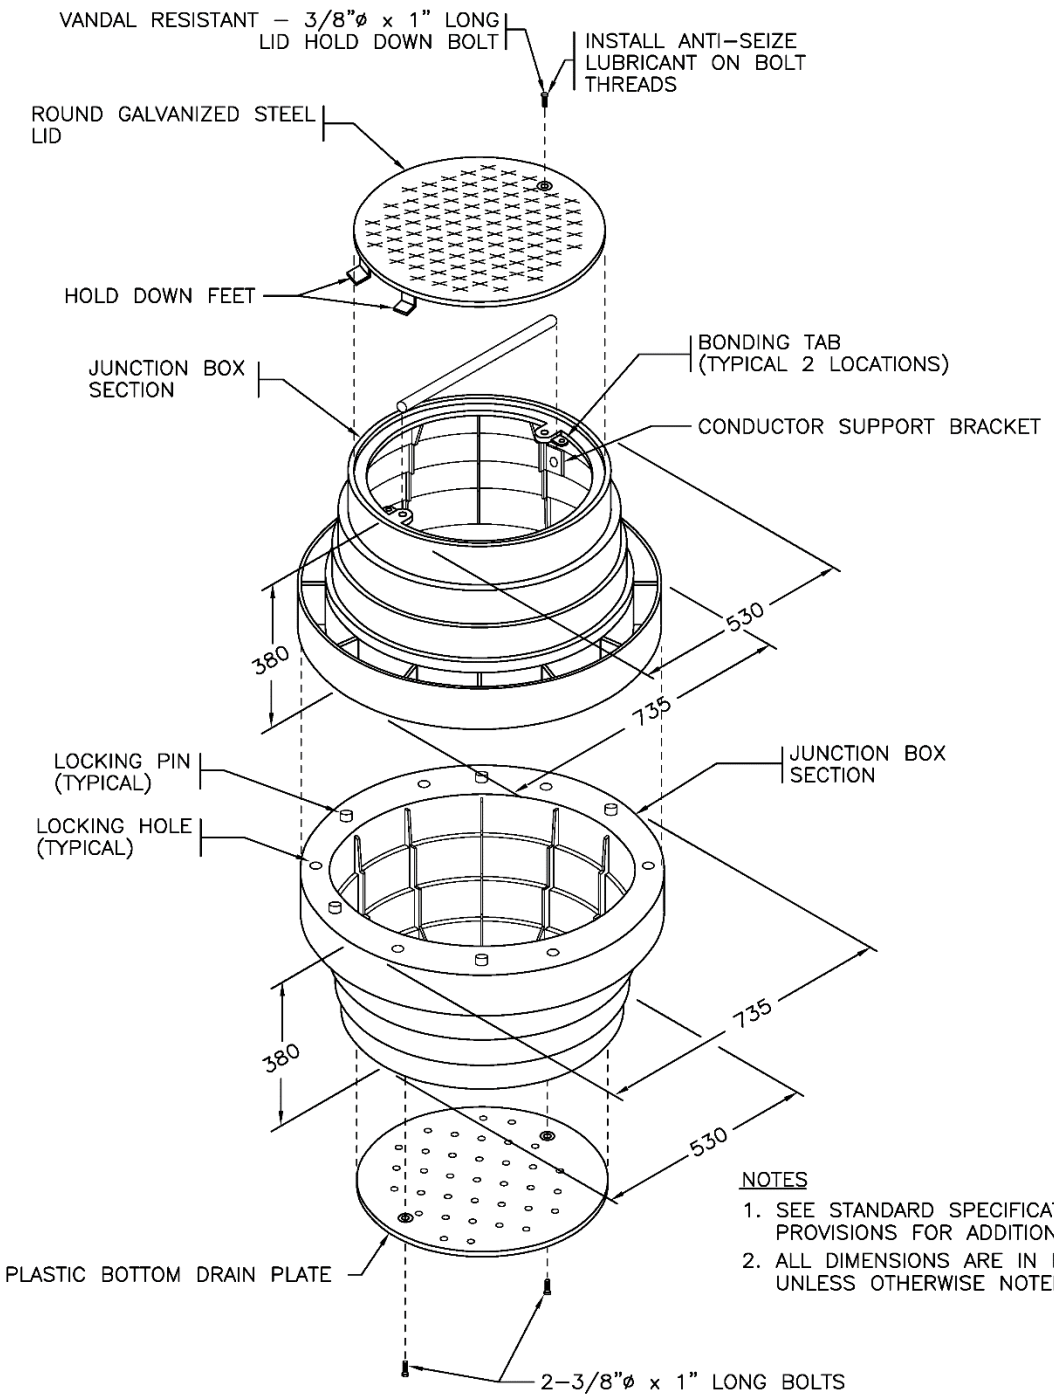

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E	GENERAL REVISIONS	APR 17
D	ANTI–SEIZING LUBRICANT NOTED	NOV 98
C	STEEL LID STOCK NUMBER REVISED	AUG 96
B	STEEL LID REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

ROUND PLASTIC JUNCTION BOX DETAILS


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.2.11

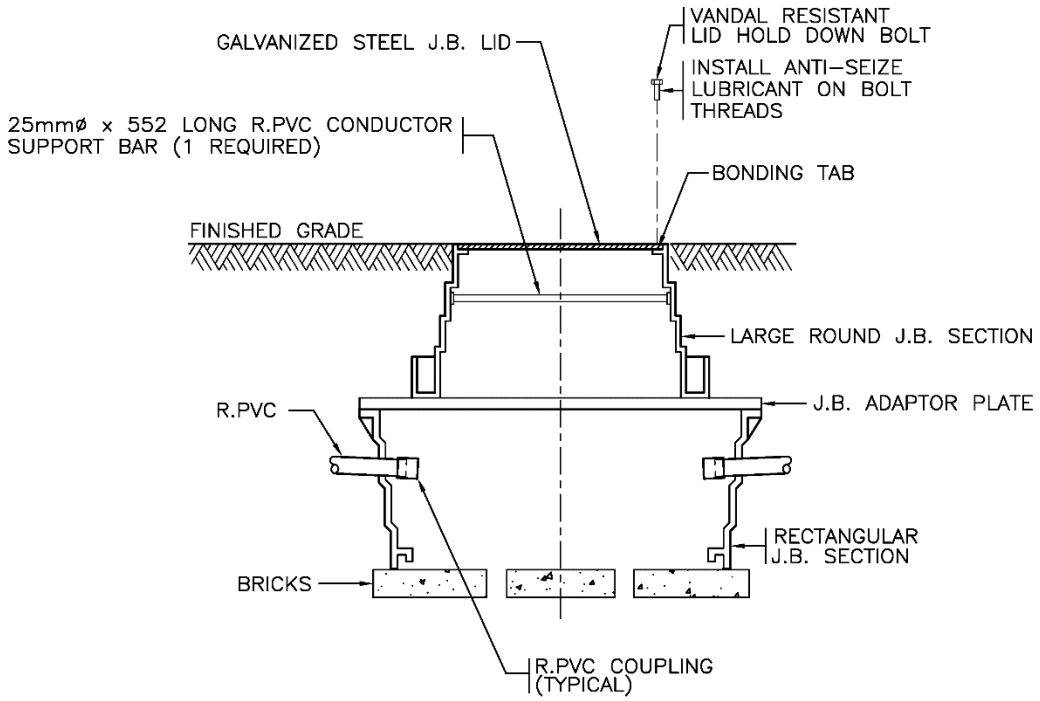

JUNCTION BOX
ONE J.B. SECTION
ONE STEEL LID
ONE J.B. ADAPTOR

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BOLT DOWN LID ON BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
E		
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI–SEIZE LUBRICANT NOTED	NOV 98
B	LID & JUNCTION BOX STOCK NUMBER REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

RECTANGULAR TO ROUND
PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date Approved
30/09/93 E.L. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–1.2.12

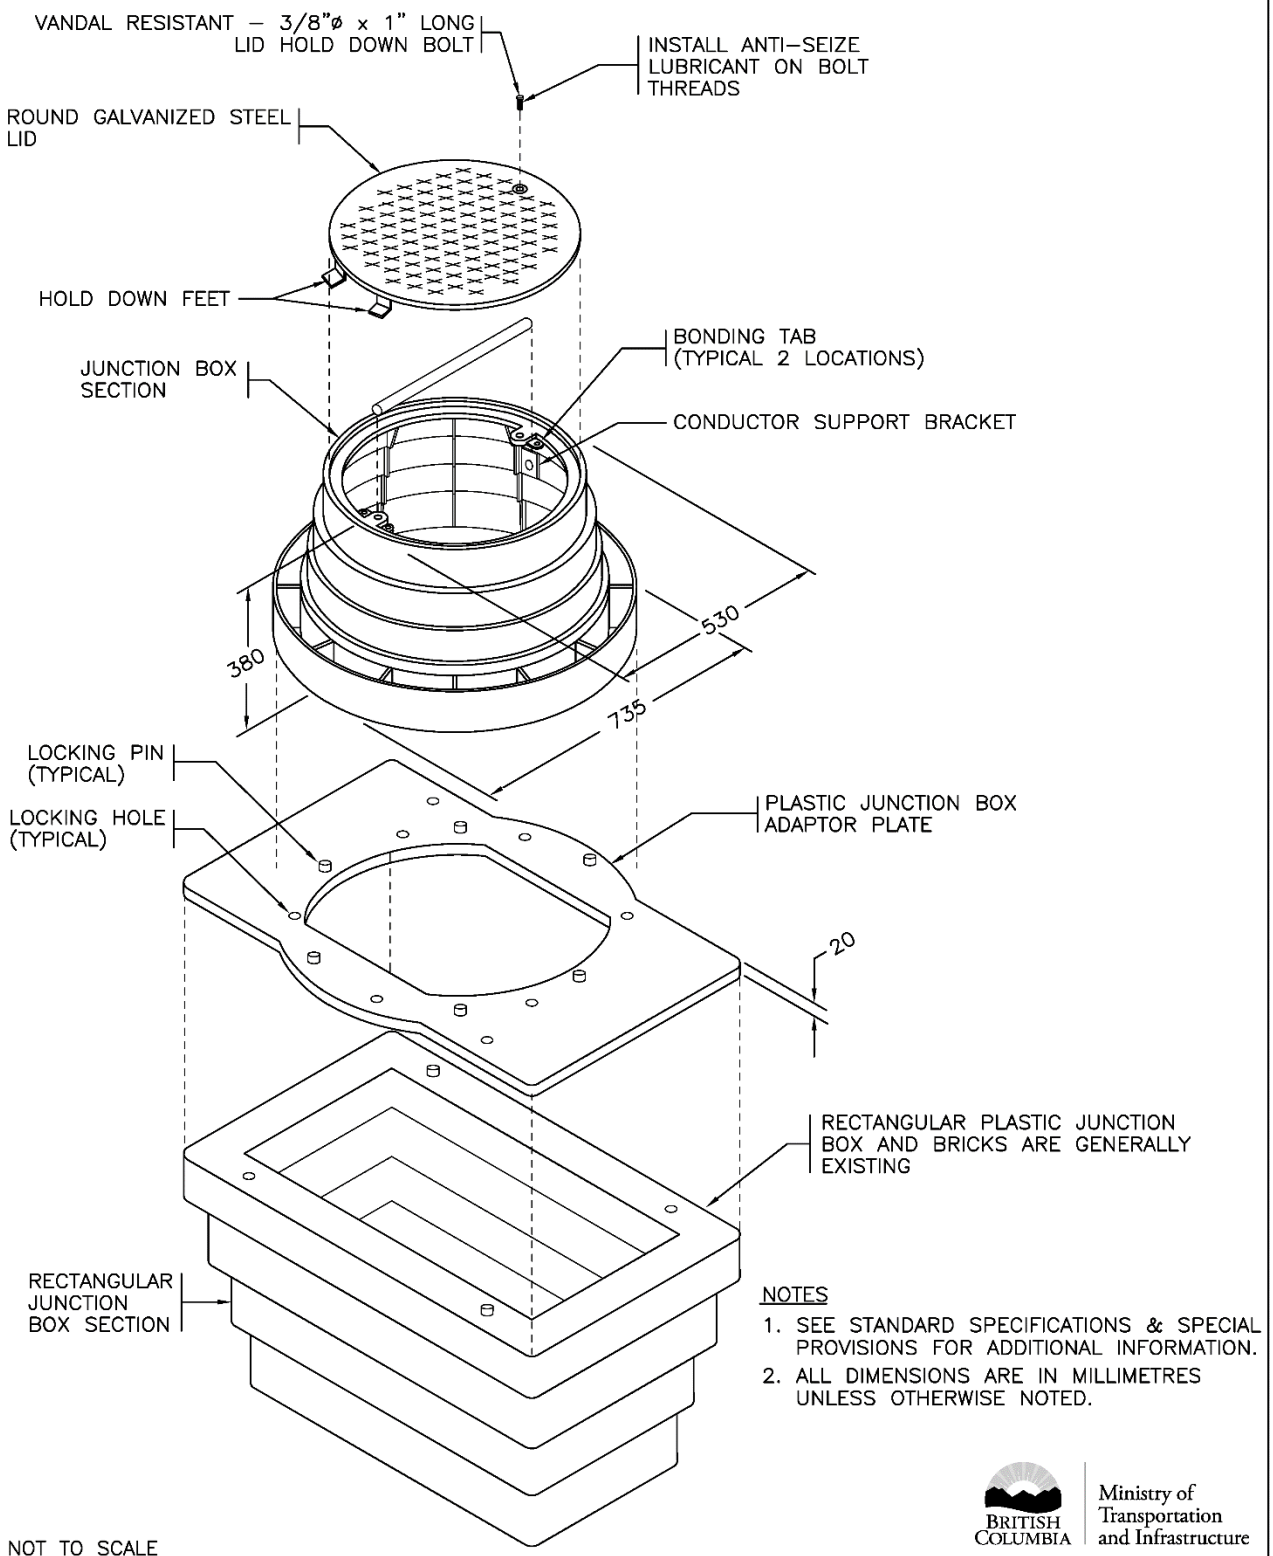

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E	GENERAL REVISIONS	APR 17
D	ANTI–SEIZING LUBRICANT NOTED	NOV 98
C	LID STOCK NUMBER REVISED	AUG 96
B	STEEL LID REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

RECTANGULAR TO ROUND PLASTIC JUNCTION BOX ADAPTOR DETAILS


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.2.13

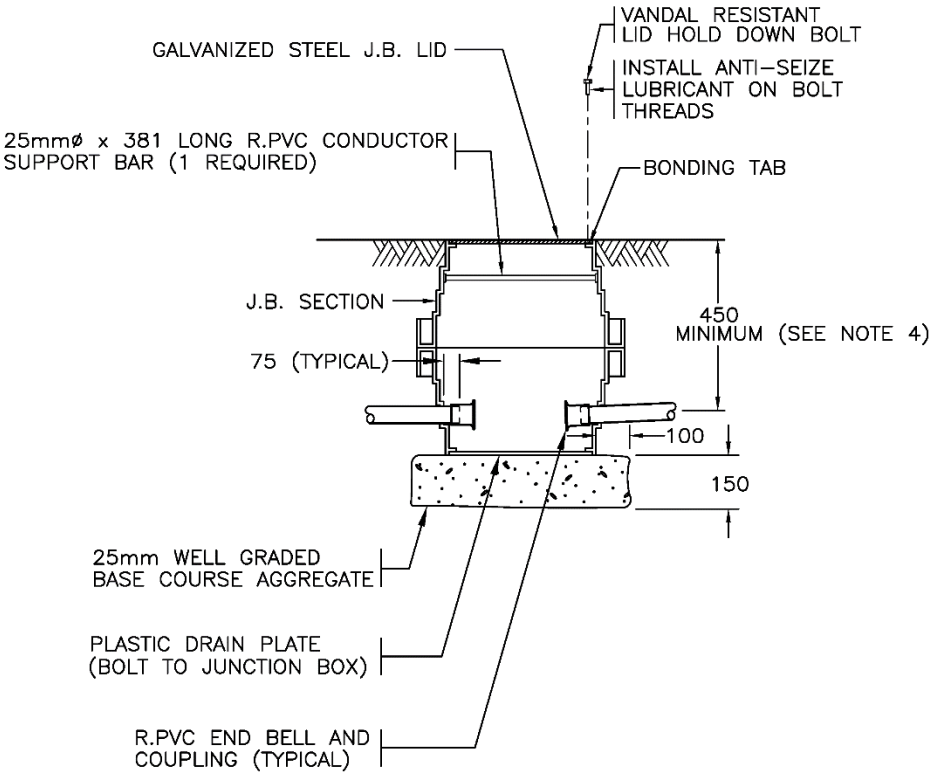

TYPE 14 JUNCTION BOX

TWO J.B. SECTIONS
ONE STEEL LID
ONE DRAIN PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. BOLT DOWN LID ON BOX BEFORE BACKFILLING, TAMPING & PAVING OPERATIONS.
3. ALL CONDUITS SHALL DRAIN TO J.B.'S
4. SEE CEC FOR APPLICATIONS ALLOWABLE FOR CONDUITS BURIED AT THE 450MM DEPTH.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE


BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
E		
D		
C	NOTE 4 ADDED	APR 20
B	GENERAL REVISIONS	APR 17
A	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98

TYPE 14 SMALL ROUND
PLASTIC JUNCTION BOX INSTALLATION DETAILS

Date 17/11/94 Approved E.L. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-1.2.14

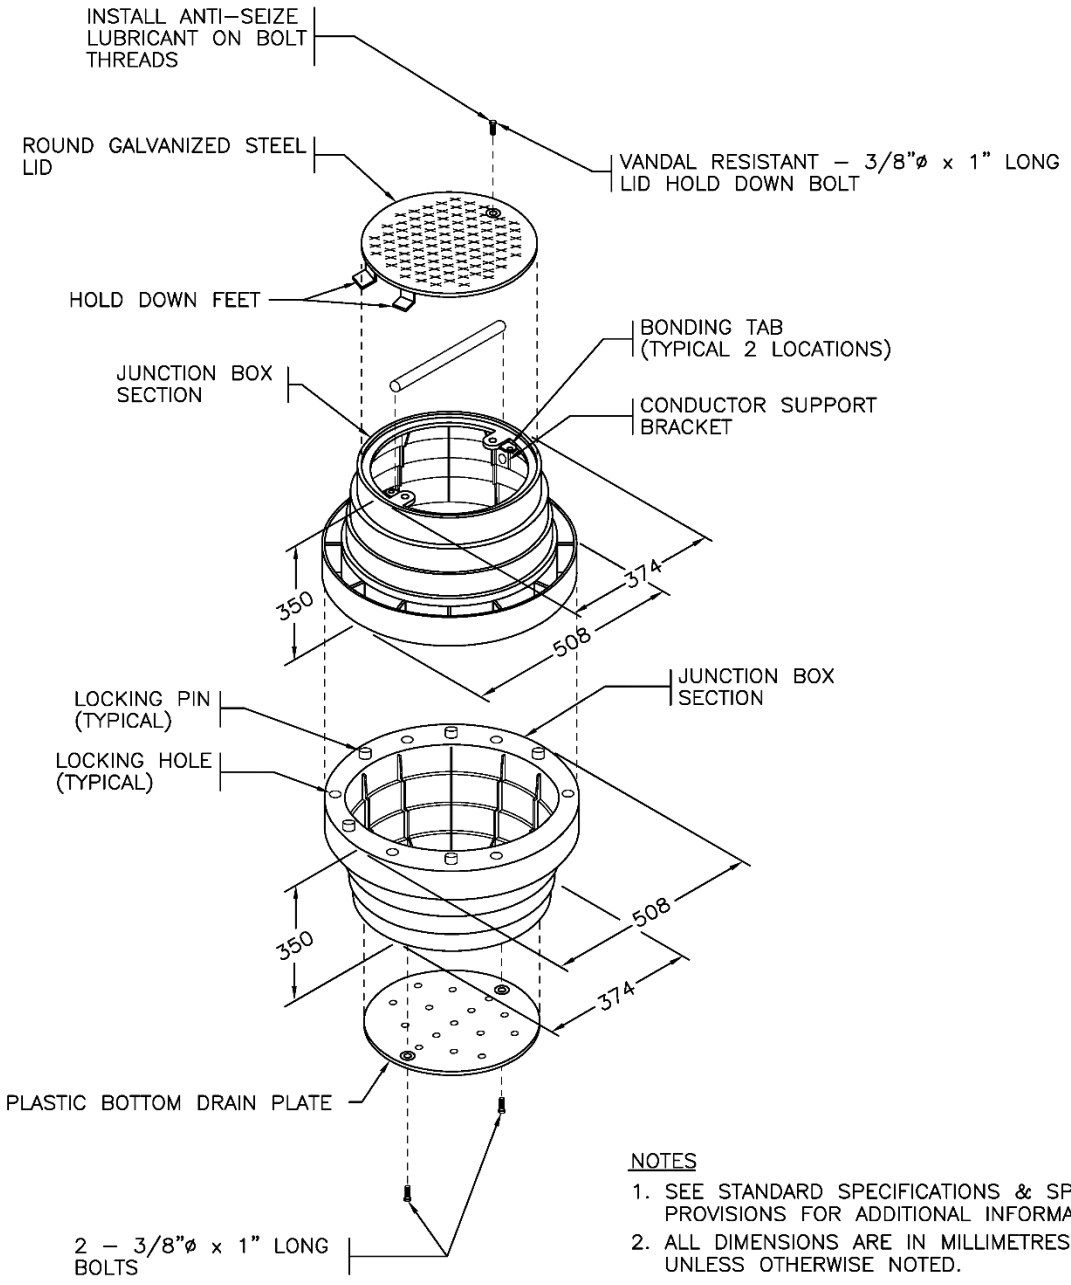

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
E		
D		
C		
B	GENERAL REVISIONS	APR 17
A	LID HOLD DOWN BOLT & ANTI–SEIZE LUBRICANT NOTED	NOV 98


SMALL ROUND PLASTIC JUNCTION BOX DETAILS

Date: **17/11/94** Approved: **E.L.** **(Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–1.2.15

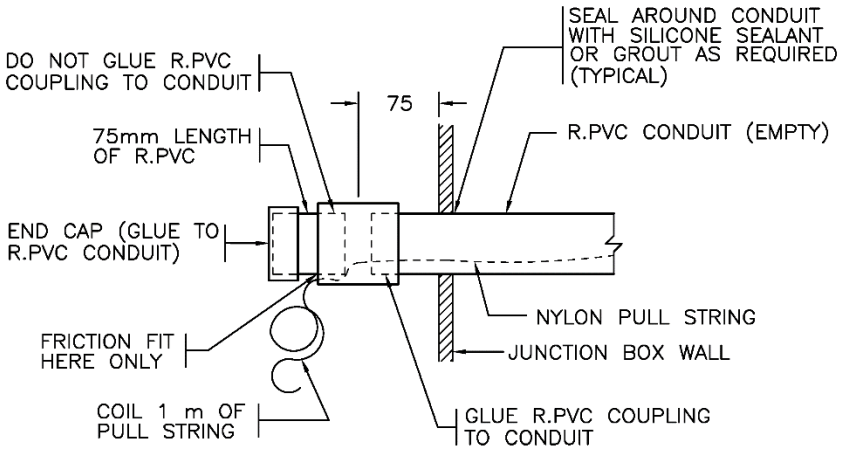

CAPPED EMPTY CONDUIT
ENTRY TO JUNCTION BOX

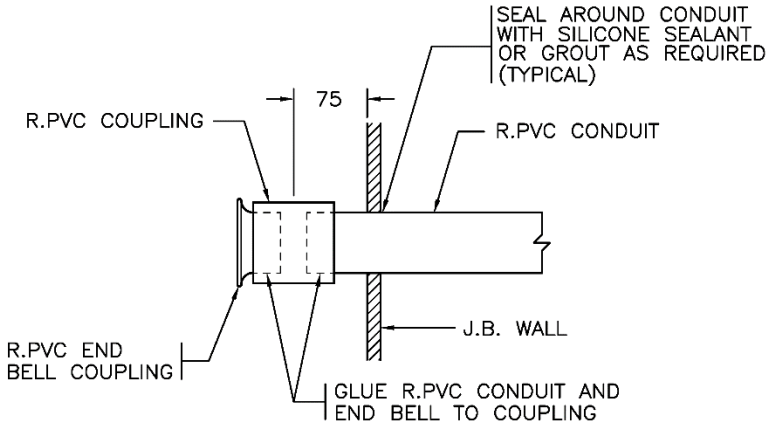

NOTE: ALL CONDUITS TO DRAIN TO J.B.

CONDUIT ENTRY TO J.B.

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. PULL STRING SHALL BE POLYPROPYLENE WITH A MINIMUM TENSILE STRENGTH OF 1.1kN. (BC HYDRO SPEC.)

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 17
C	NOTE 3 ADDED	NOV 98
B	CONDUIT GLUING CLARIFIED	OCT 97
A	GENERAL REVISIONS	AUG 94

CONDUIT ENTRY INTO
PLASTIC JUNCTION BOXES


Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.2.16

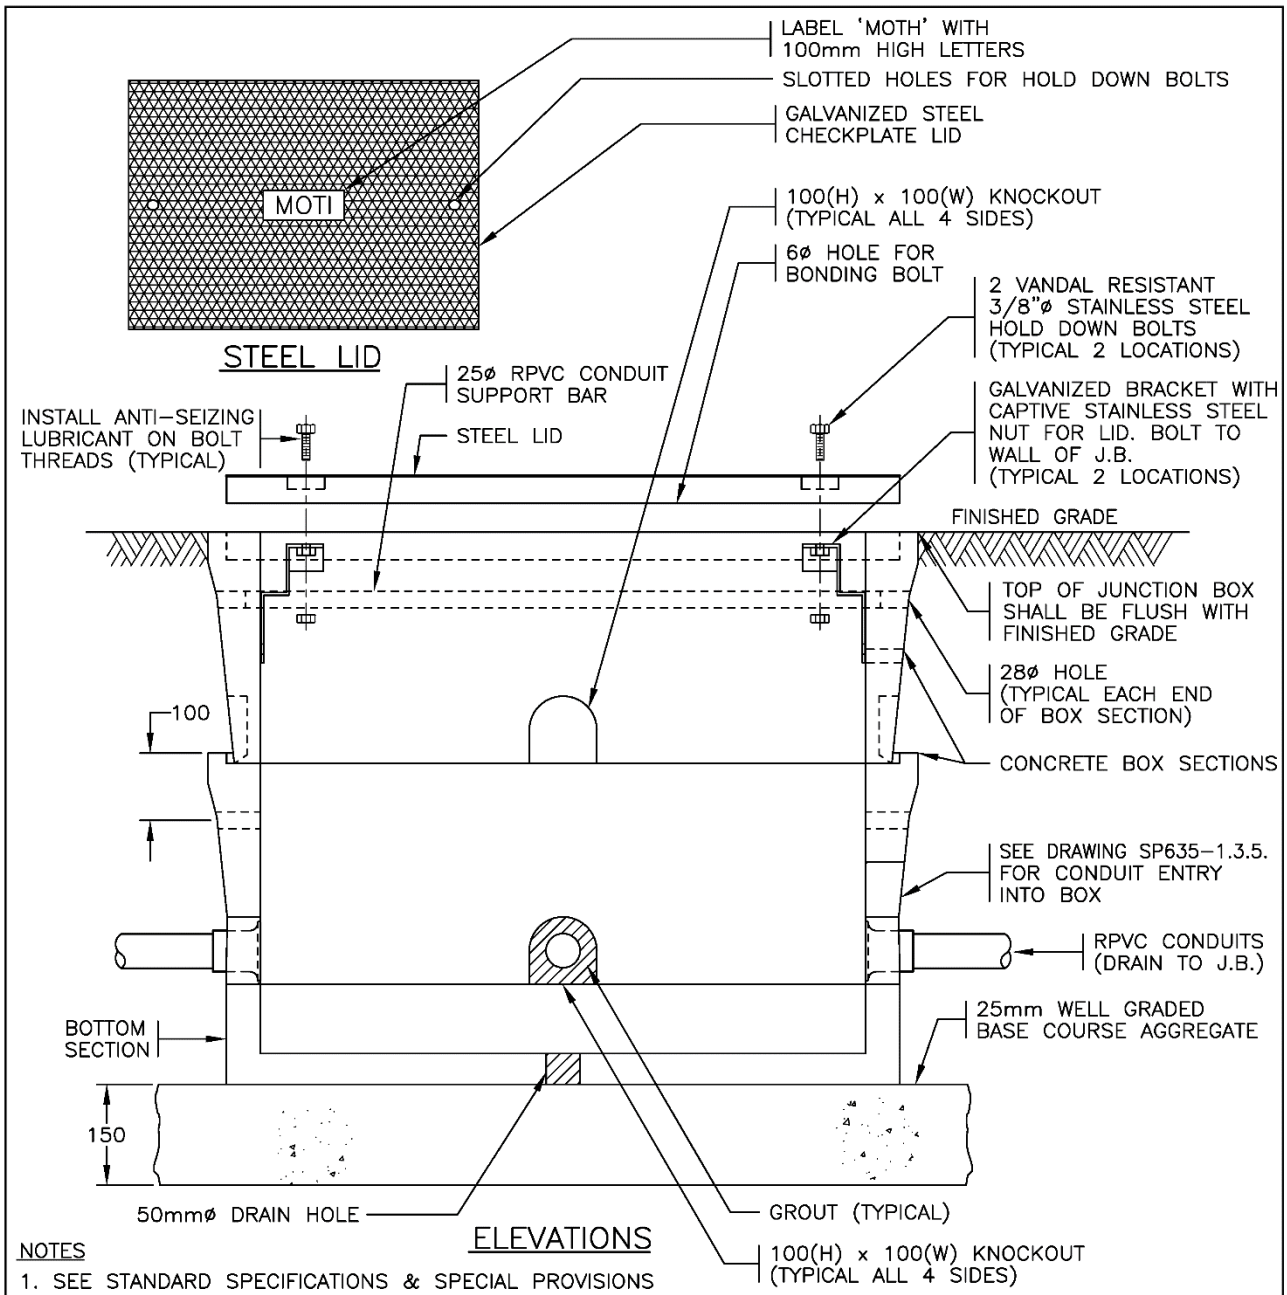

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. JUNCTION BOXES AND THEIR LIDS/HATCHES SHALL BE DESIGNED BY ENGINEERS REGISTERED WITH THE ASSOCIATION OF PROFESSIONAL ENGINEERS AND GEOSCIENTISTS OF THE PROVINCE OF BC.
3. CONCRETE JUNCTION BOXES AND THEIR LIDS/HATCHES SHALL BE DESIGNED FOR STATIC NON-DELIBERATE VEHICULAR LOADING USING AN UNFACTORED DESIGN WHEEL LOAD OF 5000 KG.
4. VAULTS SHALL BE PRE-CAST CONCRETE WITH A MINIMUM COMPRESSIVE STRENGTH OF 35 MPa AT 28 DAYS.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F	GENERAL REVISIONS	APR 20
F	GENERAL REVISIONS	APR 17
E	GENERAL REVISIONS	APR 05
D	KON KAST PRODUCT DELETED	OCT 03
C	ANTI-SEIZING LUBRICANT NOTED	NOV 98
B	LID HOLD DOWN REVISED	AUG 96

CONCRETE JUNCTION BOX DETAILS (FOR LOCATIONS NOT ROUTINELY SUBJECTED TO TRAFFIC)

Date Approved


18/11/94 **E.L.** **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.3.1

7

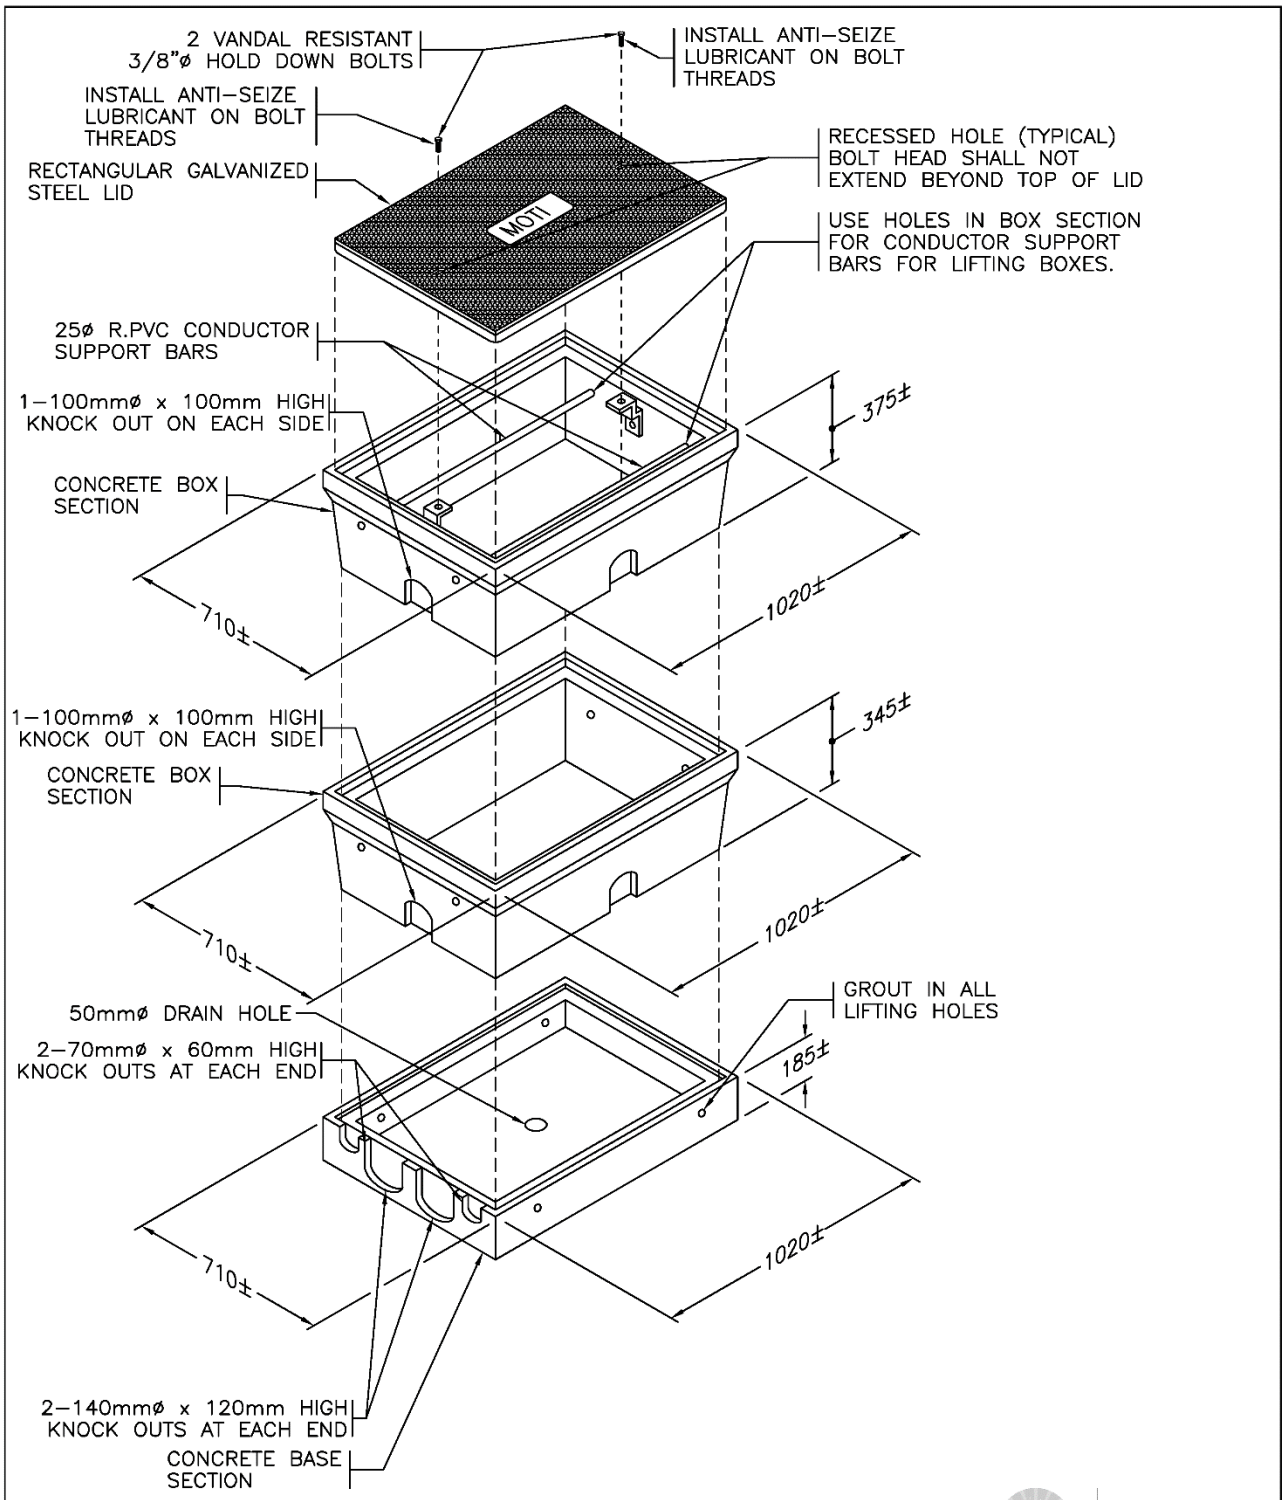

SEE DRAWING SP635-1.3.1 FOR NOTES

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
G	GENERAL REVISIONS	APR 20
F	GENERAL REVISIONS	APR 17
E	GENERAL REVISIONS	APR 05
D	KON KAST PRODUCT DELETED	OCT 03
C	A.E. CONCRETE DIMS. REVISED & ANTI-SEIZE LUBRICANT NOTED	NOV 98

CONCRETE JUNCTION BOX DETAILS (FOR LOCATIONS NOT ROUTINELY SUBJECTED TO TRAFFIC)


Date Approved

18/11/94 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.3.2

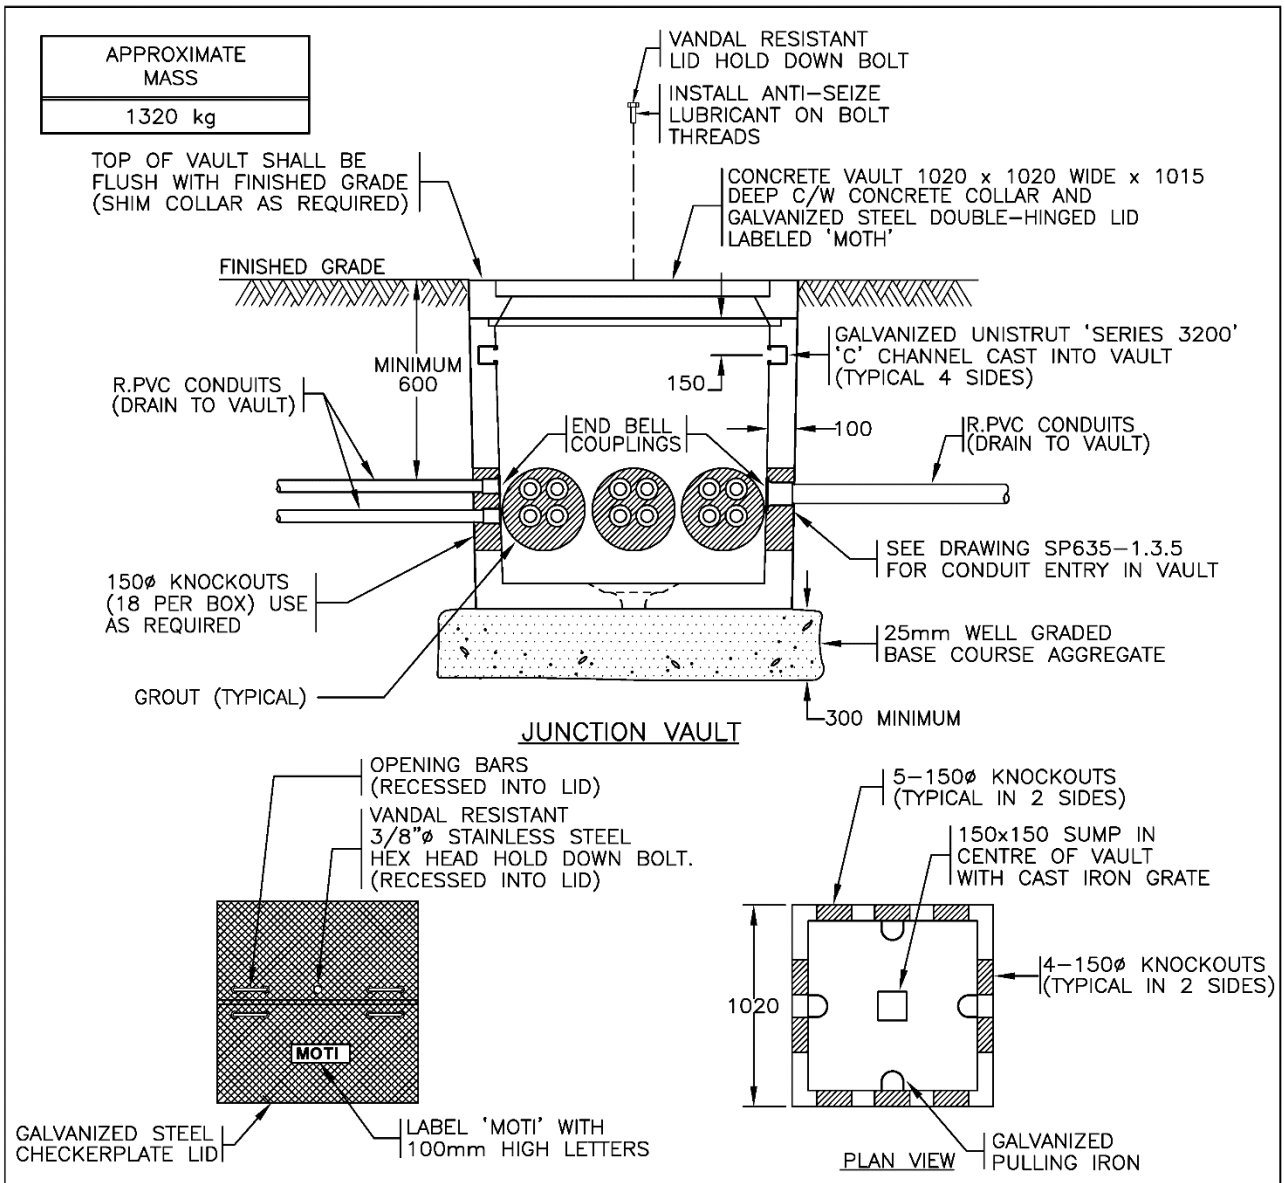

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. JUNCTION BOXES AND THEIR LIDS/HATCHES SHALL BE DESIGNED BY ENGINEERS REGISTERED WITH WITH THE ASSOCIATION OF PROFESSIONAL ENGINEERS AND GEOSCIENTISTS OF THE PROVINCE OF BC.
3. CONCRETE JUNCTION BOXES AND THEIR LIDS/HATCHES SHALL BE DESIGNED FOR STATIC NON-DELIBERATE VEHICULAR LOADING USING THE WHEEL LOADING FROM EITHER OF THE FOLLOWING:
   1. CANADIAN HIGHWAY BRIDGE DESIGN CODE CSA S6 CL-625;
   2. AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS HL-93; OR
   3. AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES H-20 OR HS-20.
4. VAULTS SHALL BE PRE-CAST CONCRETE WITH A MINIMUM COMPRESSIVE STRENGTH OF 35 MPa AT 28 DAYS.
5. FOR CONCRETE VAULTS IN LOCATIONS ROUTINELY SUBJECTED TO TRAFFIC, VAULTS AND LIDS/HATCHES SHALL BE DESIGNED FOR FULL HIGHWAY LOADING INCREASED BY THE DYNAMIC LOAD ALLOWANCE.
6. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
E	GENERAL REVISIONS	APR 20
D	GENERAL REVISIONS	APR 17
C	LID HOLD DOWN BOLT & ANTI-SEIZE LUBRICANT NOTED	NOV 98
B	NOTE 2 REVISED	AUG 95
A	GENERAL REVISIONS	AUG 94

SMALL CONCRETE VAULT DETAILS - 1020 SQUARE X 1015 DEEP (FOR LOCATIONS NOT ROUTINELY SUBJECTED TO TRAFFIC)


Date Approved


30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.3.3

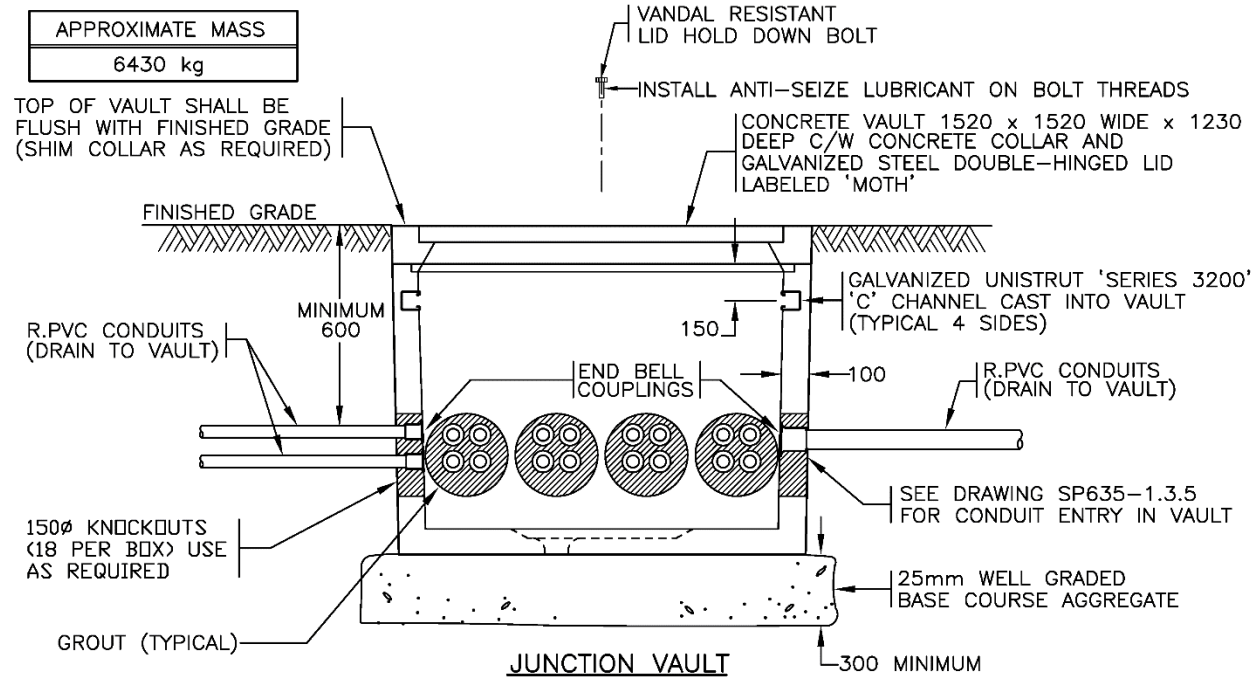

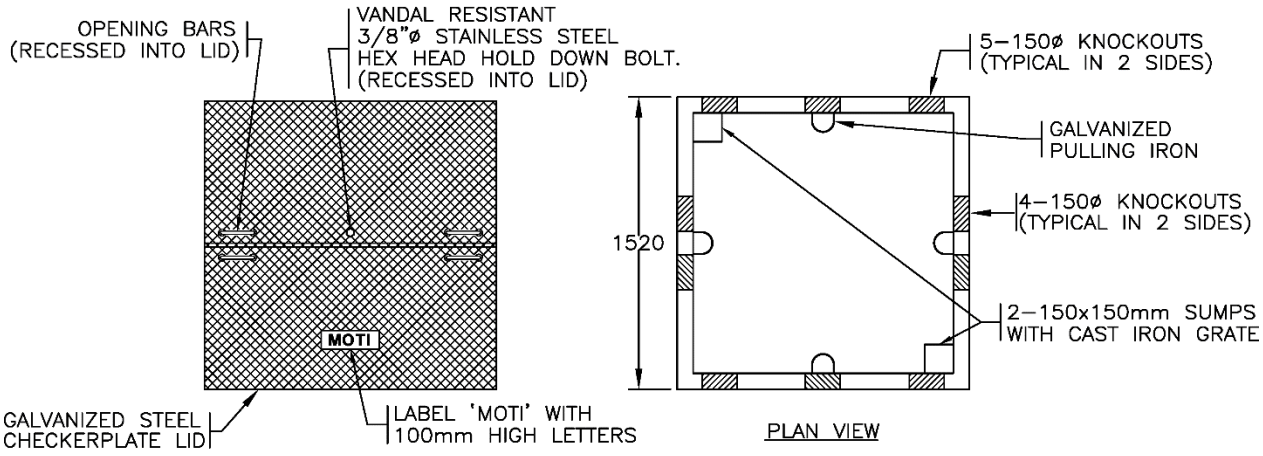

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. JUNCTION BOXES AND THEIR LIDS/HATCHES SHALL BE DESIGNED BY ENGINEERS REGISTERED WITH WITH THE ASSOCIATION OF PROFESSIONAL ENGINEERS AND GEOSCIENTISTS OF THE PROVINCE OF BC.
3. CONCRETE JUNCTION BOXES AND THEIR LIDS/HATCHES SHALL BE DESIGNED FOR STATIC NON-DELIBERATE VEHICULAR LOADING USING THE WHEEL LOADING FROM EITHER OF THE FOLLOWING:
   1. CANADIAN HIGHWAY BRIDGE DESIGN CODE CSA S6 CL-625;
   2. AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS HL-93; OR
   3. AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES H-20 OR HS-20.
4. VAULTS SHALL BE PRE-CAST CONCRETE WITH A MINIMUM COMPRESSIVE STRENGTH OF 35 MPa AT 28 DAYS.
5. FOR CONCRETE VAULTS IN LOCATIONS ROUTINELY SUBJECTED TO TRAFFIC, VAULTS AND LIDS/HATCHES SHALL BE DESIGNED FOR FULL HIGHWAY LOADING INCREASED BY THE DYNAMIC LOAD ALLOWANCE.
6. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C		
B		
A	GENERAL REVISIONS	APR 20


CONCRETE VAULT DETAILS – 1520 SQUARE X 1230 DEEP (FOR LOCATIONS NOT ROUTINELY SUBJECTED TO TRAFFIC)

Date Approved

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.3.4

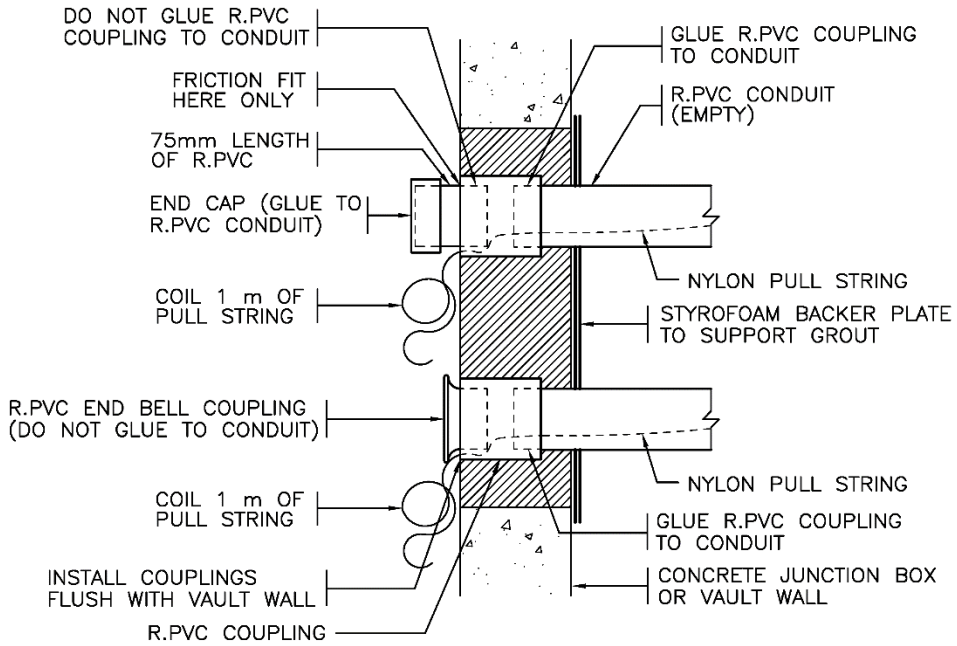

CONDUIT ENTRY TO VAULT OR CONCRETE JUNCTION BOX

NOTES

1. SEE DRAWINGS SP635–1.3.1 TO –1.3.4 FOR NOTES AND ADDITIONAL DETAILS.
2. PULL STRING SHALL BE POLYPROPYLENE WITH A MINIMUM TENSILE STRENGTH OF 1.1kN. (BC HYDRO SPEC.)

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 17
C	NOTES 1 & 2 ADDED	NOV 98
B	CONDUIT GLUING CLARIFIED	OCT 97
A	GENERAL REVISIONS	AUG 94

CONDUIT ENTRY INTO CONCRETE VAULT OR JUNCTION BOX

Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.3.5