
LOOP SPACING TABLE			
WIDTH (W)	(A)	(B)	(C)
6000	400	200	400
7000	750	500	750
8000	1100	800	1100
9000	1500	1000	1500

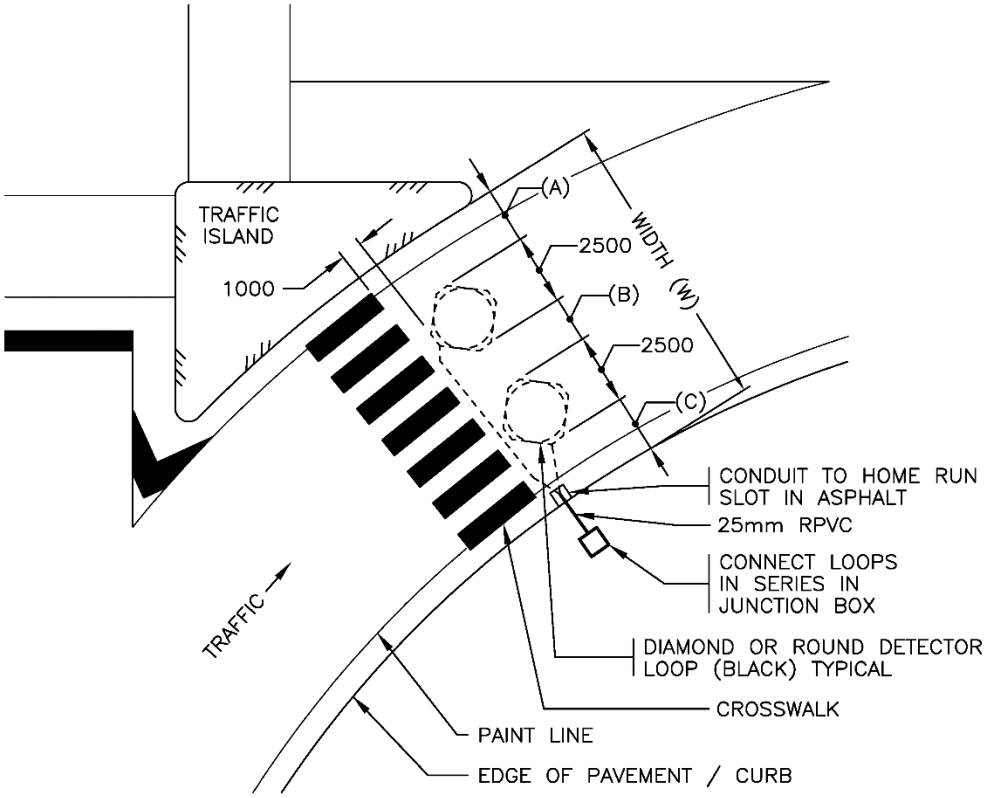

RIGHT TURN LANE WITH TRAFFIC ISLAND SCENARIO SHOWN

PAVEMENT WIDTH
BETWEEN 6000 AND 9000

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. FOR DIAMOND DETECTOR LOOP DETAILS SEE DRAWING SP635–2.8.2. FOR ROUND DETECTOR LOOP DETAILS SEE DRAWING SP635–2.8.3.
4. LOCATE LOOP CONDUITS IN ASPHALT TO SUIT LOOP LOCATIONS & MINIMIZE THE LENGTHS OF HOME RUN SLOTS IN THE ASPHALT.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


No.	Revision	Date
E		
D		
C		
B	GENERAL REVISIONS	APR 17
A	DRAWING NUMBER CHANGED, ROUND LOOPS ADDED	NOV 98

LAYOUT FOR DIAMOND OR ROUND COUNTING DETECTOR LOOPS

Date Approved
15/11/95 M.C. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–2.8.13

ON STRAIGHT SECTIONS OF ROAD, THE LOOP WILL BE CENTERED IN THE LANE.
ON CURVED ROADS (AS SHOWN BELOW) THE LOOP WILL BE LOCATED, SHAPED AND SIZED TO BEST REFLECT THE TRAVEL PATHS OF VEHICLES.

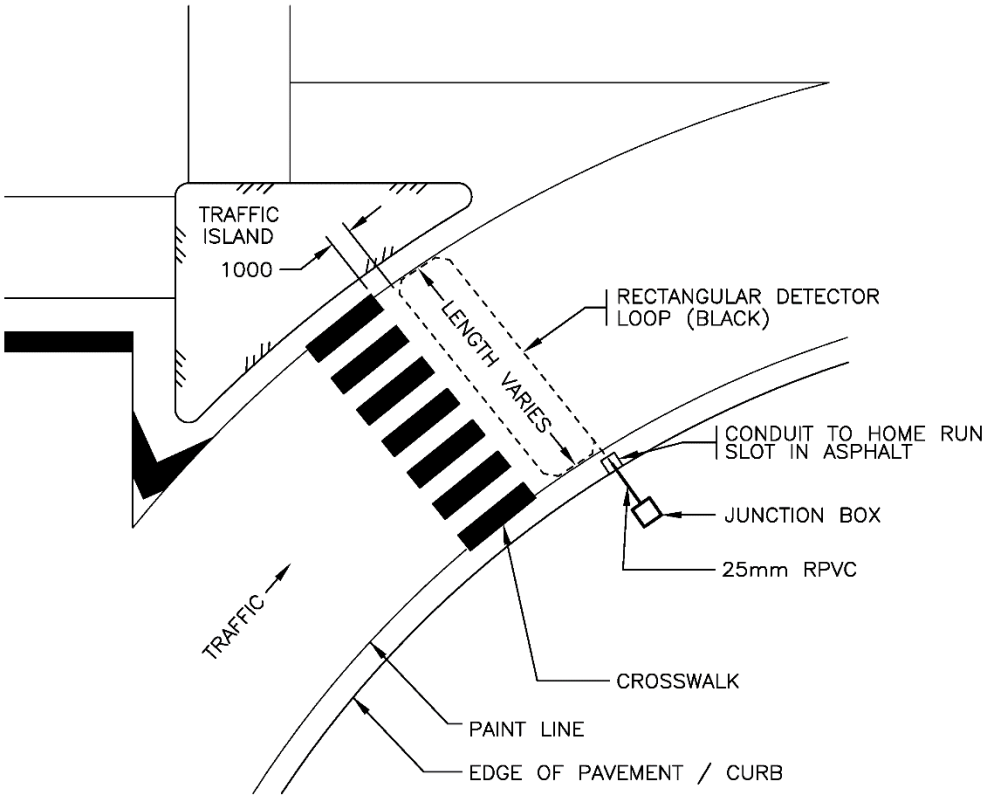

RIGHT TURN LANE WITH TRAFFIC ISLAND SCENARIO SHOWN

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. FOR RECTANGULAR DETECTOR LOOP DETAILS SEE DRAWING SP635–2.8.4
4. LOCATE LOOP CONDUITS IN ASPHALT TO SUIT LOOP LOCATIONS & MINIMIZE THE LENGTHS OF HOME RUN SLOTS IN THE ASPHALT.

NOT TO SCALE


BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C		
B	GENERAL REVISIONS	APR 17
A	DRAWING NUMBER CHANGED,	NOV 98


LAYOUT FOR RECTANGULAR COUNTING DETECTOR LOOPS

Date Approved: **15/11/95 M.C. (Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–2.8.14

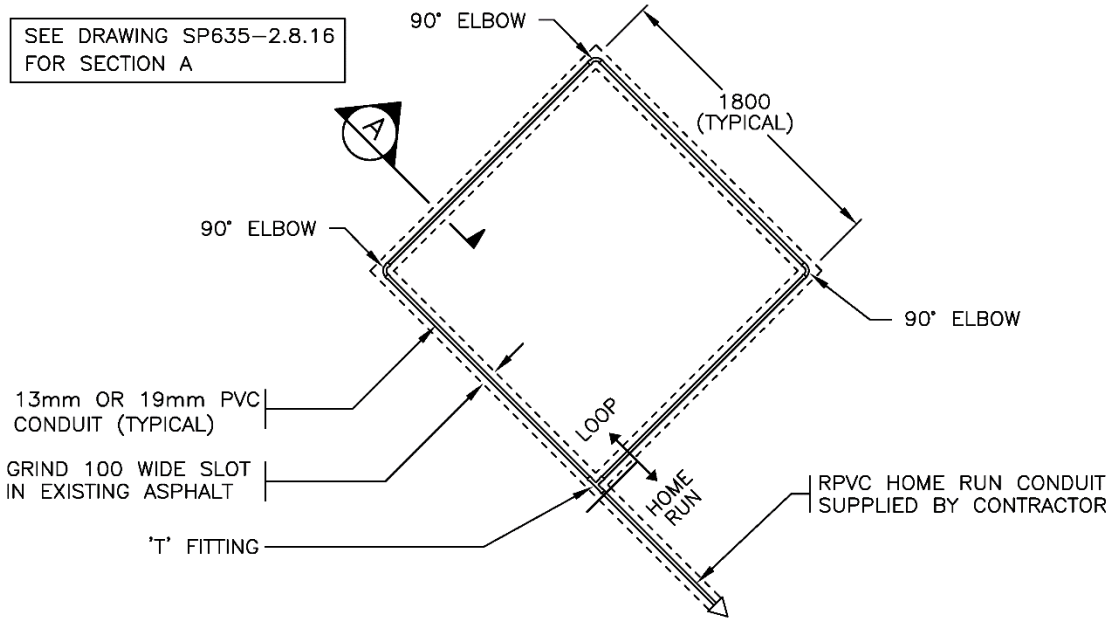

PREFORMED LOOP LAYOUT

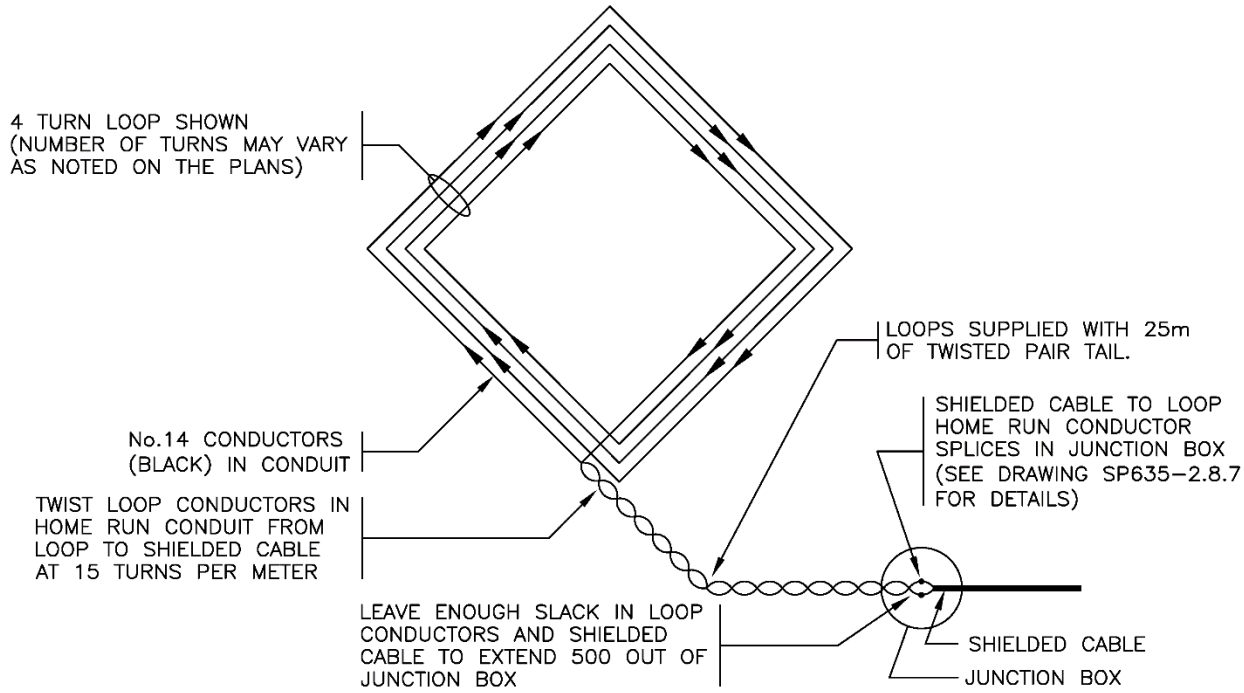

CONDUIT LAYOUT IN PREFORMED LOOP

SEE DRAWING SP635–2.8.16 FOR NOTES

SEE DRAWING SP635–2.8.2 FOR LOOP INDUCTANCE TABLE

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C		
B	GENERAL REVISIONS	APR 20
A	GENERAL REVISIONS	APR 17

PRE–FORMED DIAMOND DETECTOR LOOP INSTALLATION DETAILS


Date Approved

16/10/00 M.C. (Signature on File)


Chief Engineer

SPECIFICATION DRAWING No.

SP635–2.8.15

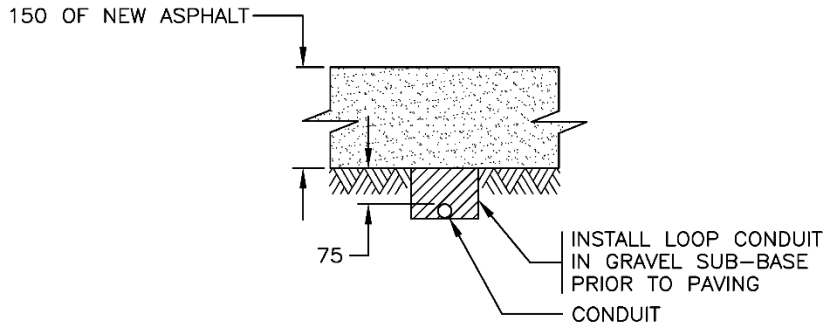

SECTION A
NEW ROAD CONSTRUCTION

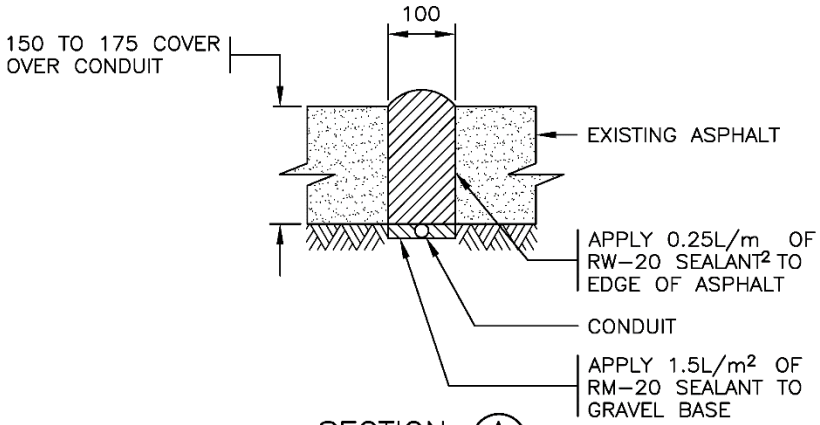

SECTION A
EXISTING ROAD SURFACE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. WHERE INSTALLING PREFORMED LOOPS IN EXISTING ASPHALT GRIND OUT SLOT AND INSTALL PREFORMED LOOP. BACKFILL SLOT WITH HOT MIXED ASPHALT PAVEMENT. COMPACT ASPHALT WITH VIBRATING MECHANICAL COMPACTOR WITH 75mm SQUARE PLATE. WHERE INSTALLING PREFORMED LOOPS IN NEW ROAD CONSTRUCTION, PLACE CONDUIT IN GRAVEL SUB-BASE JUST BELOW ASPHALT. LAYOUT STOP BARS, CURB RETURNS, ISLANDS, MEDIANS, LANE LINES AND LOOPS AND VERIFY WITH MINISTRY REPRESENTATIVE PRIOR TO CONSTRUCTION. FAILURE TO CORRECTLY LOCATE THE LOOPS IN THEIR REQUIRED LOCATIONS WILL RESULT IN REINSTALLATION OF THE LOOPS AT THE CONTRACTORS EXPENSE.
4. PREFORMED LOOPS SHALL BE REVIEWED WITH THE MINISTRY REPRESENTATIVE PRIOR TO INSTALLATION.
5. CONTRACTOR SHALL VERIFY LOOPS LOCATIONS (CUT INTO OVERLAYED OR NEW PAVED ROADWAYS) WITH THE MINISTRY REPRESENTATIVE AFTER INSTALLATION.
6. PRE-APPROVED LOOPS ARE NOTED ON THE MINISTRY "RECOGNIZED PRODUCTS LIST". PRE-FORMED LOOPS OR EITHER RIGID OR FLEXIBLE PVC TYPE AND ARE COMPLETE WITH 25m HOME RUN OF CONDUCTOR. AS THE HOME RUN LENGTHS WILL VARY, THE CONTRACTOR SHALL SUPPLY PVC CONDUIT FOR HOME RUNS.

NOT TO SCALE


BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	NOTE 4 AND 6 UPDATED	APR 20
B	GENERAL REVISIONS	APR 17
A	NOTE 6 REVISED	OCT 03


PRE-FORMED DIAMOND DETECTOR LOOP INSTALLATION DETAILS

Date Approved
16/10/00 M.C. (Signature on File)
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635-2.8.16

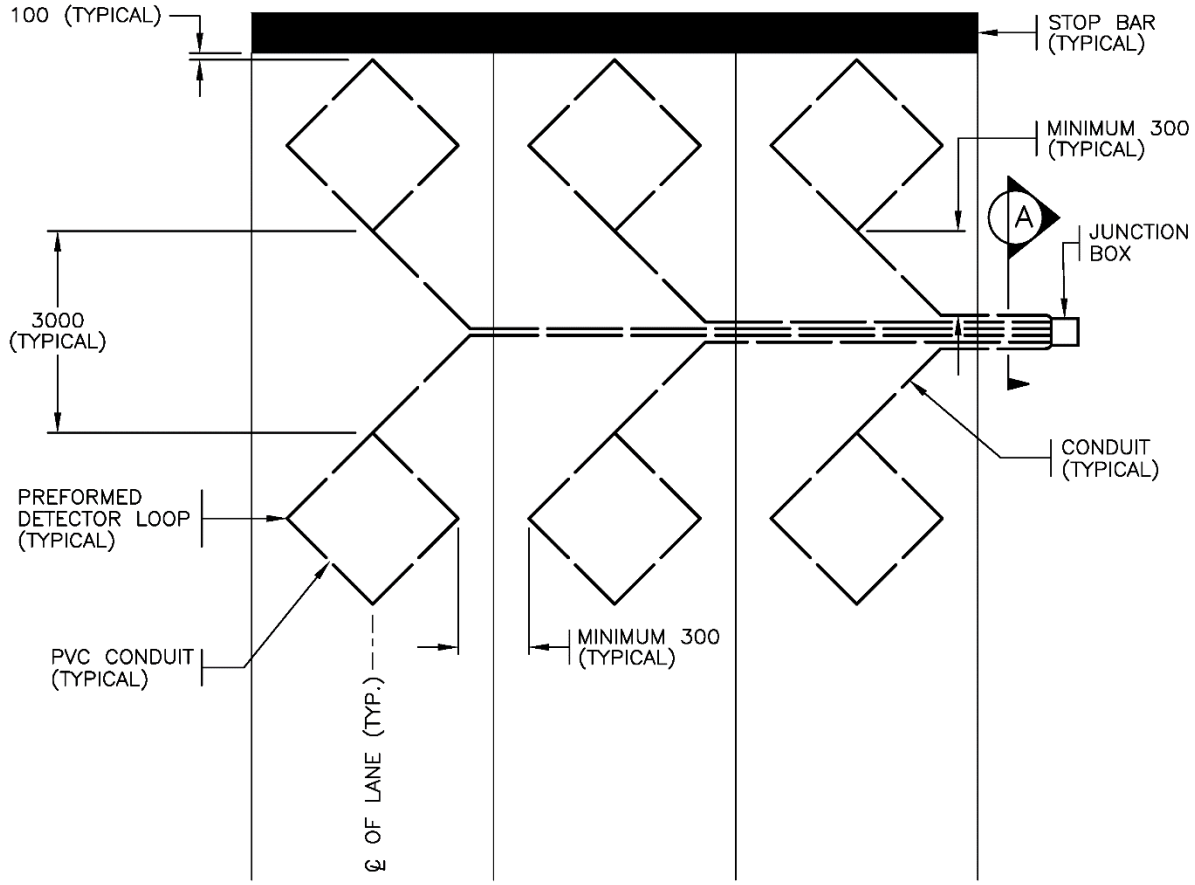

TYPICAL PREFORMED LOOP LAYOUT

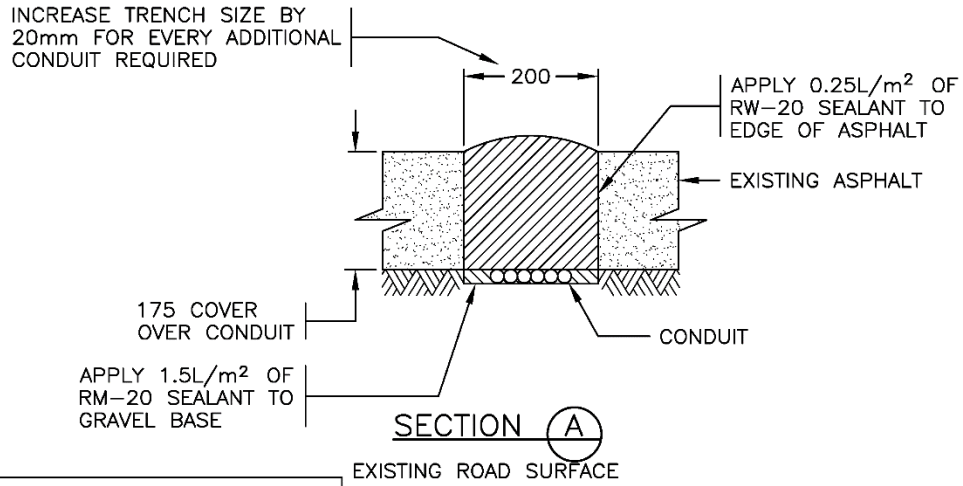

SECTION A

SEE DRAWING SP635–2.8.16 FOR NOTES

SEE DRAWING SP635–2.8.2 FOR LOOP INDUCTANCE TABLE

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C		
B		
A	GENERAL REVISIONS	APR 17

LAYOUT FOR PRE–FORMED TRAFFIC SIGNAL DETECTOR LOOPS

Date Approved


16/10/00 M.C. (Signature on File)

Chief Engineer

SPECIFICATION DRAWING No.

SP635–2.8.17

REFER TO THE MINISTRY'S MANUAL OF STANDARD TRAFFIC SIGNS & PAVEMENT MARKINGS FOR APPLICATIONS WHICH APPLY TO THIS SIGN

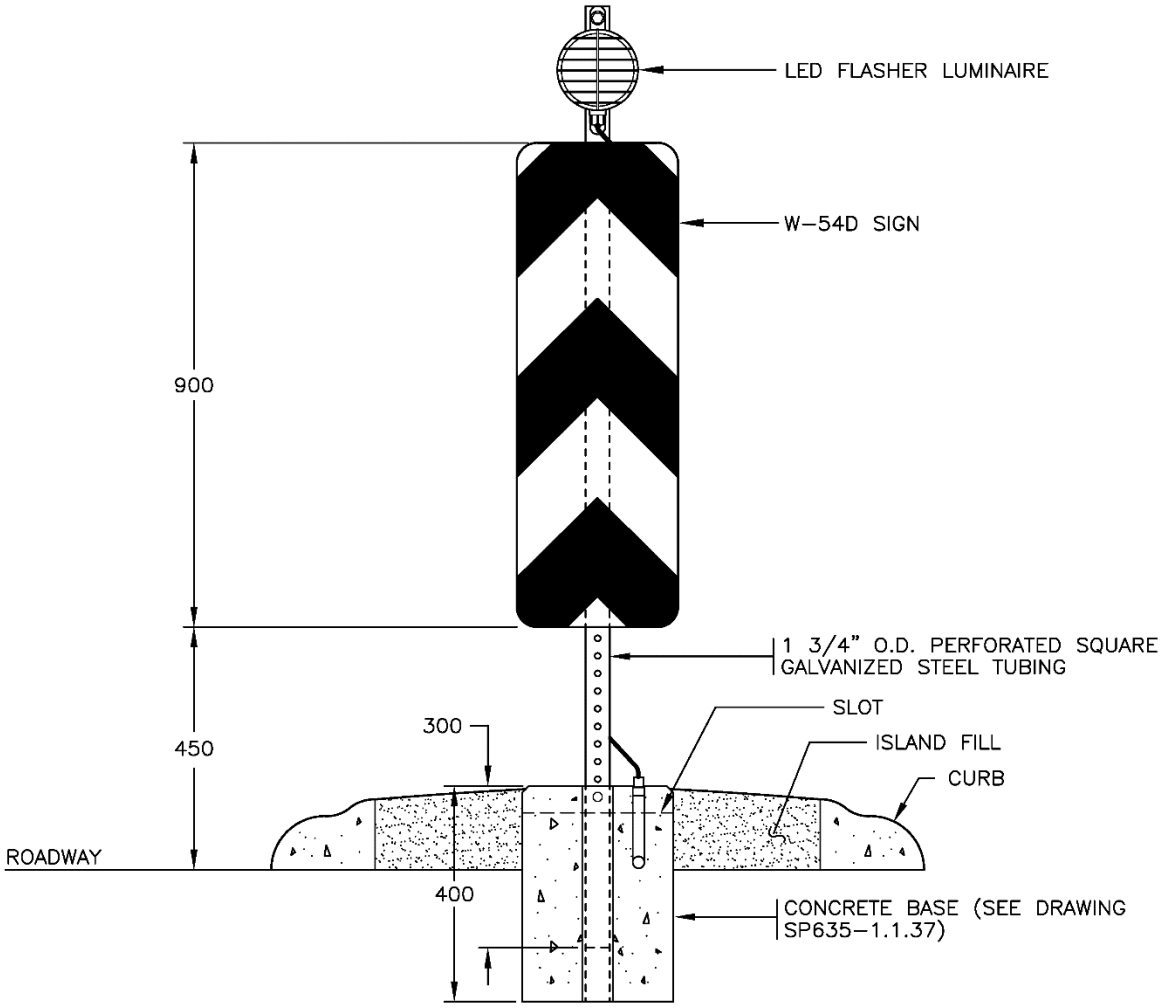

ELEVATION

SEE DRAWING SP635-2.9.3 FOR NOTES AND ADDITIONAL DETAILS

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
F		
E	GENERAL REVISIONS	APR 20
D	GENERAL REVISIONS	APR 17
C	CONCRETE BASE DRAWING REFERENCE REVISED	AUG 96
B	REVISION NOTE 'A' ADDED	AUG 95
A	GENERAL REVISIONS	AUG 94

FLASHER LUMINAIRE INSTALLATION DETAILS ON PERFORATED SQUARE STEEL TUBING (1 SIGN)


Date Approved

MAR 94 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-2.9.1

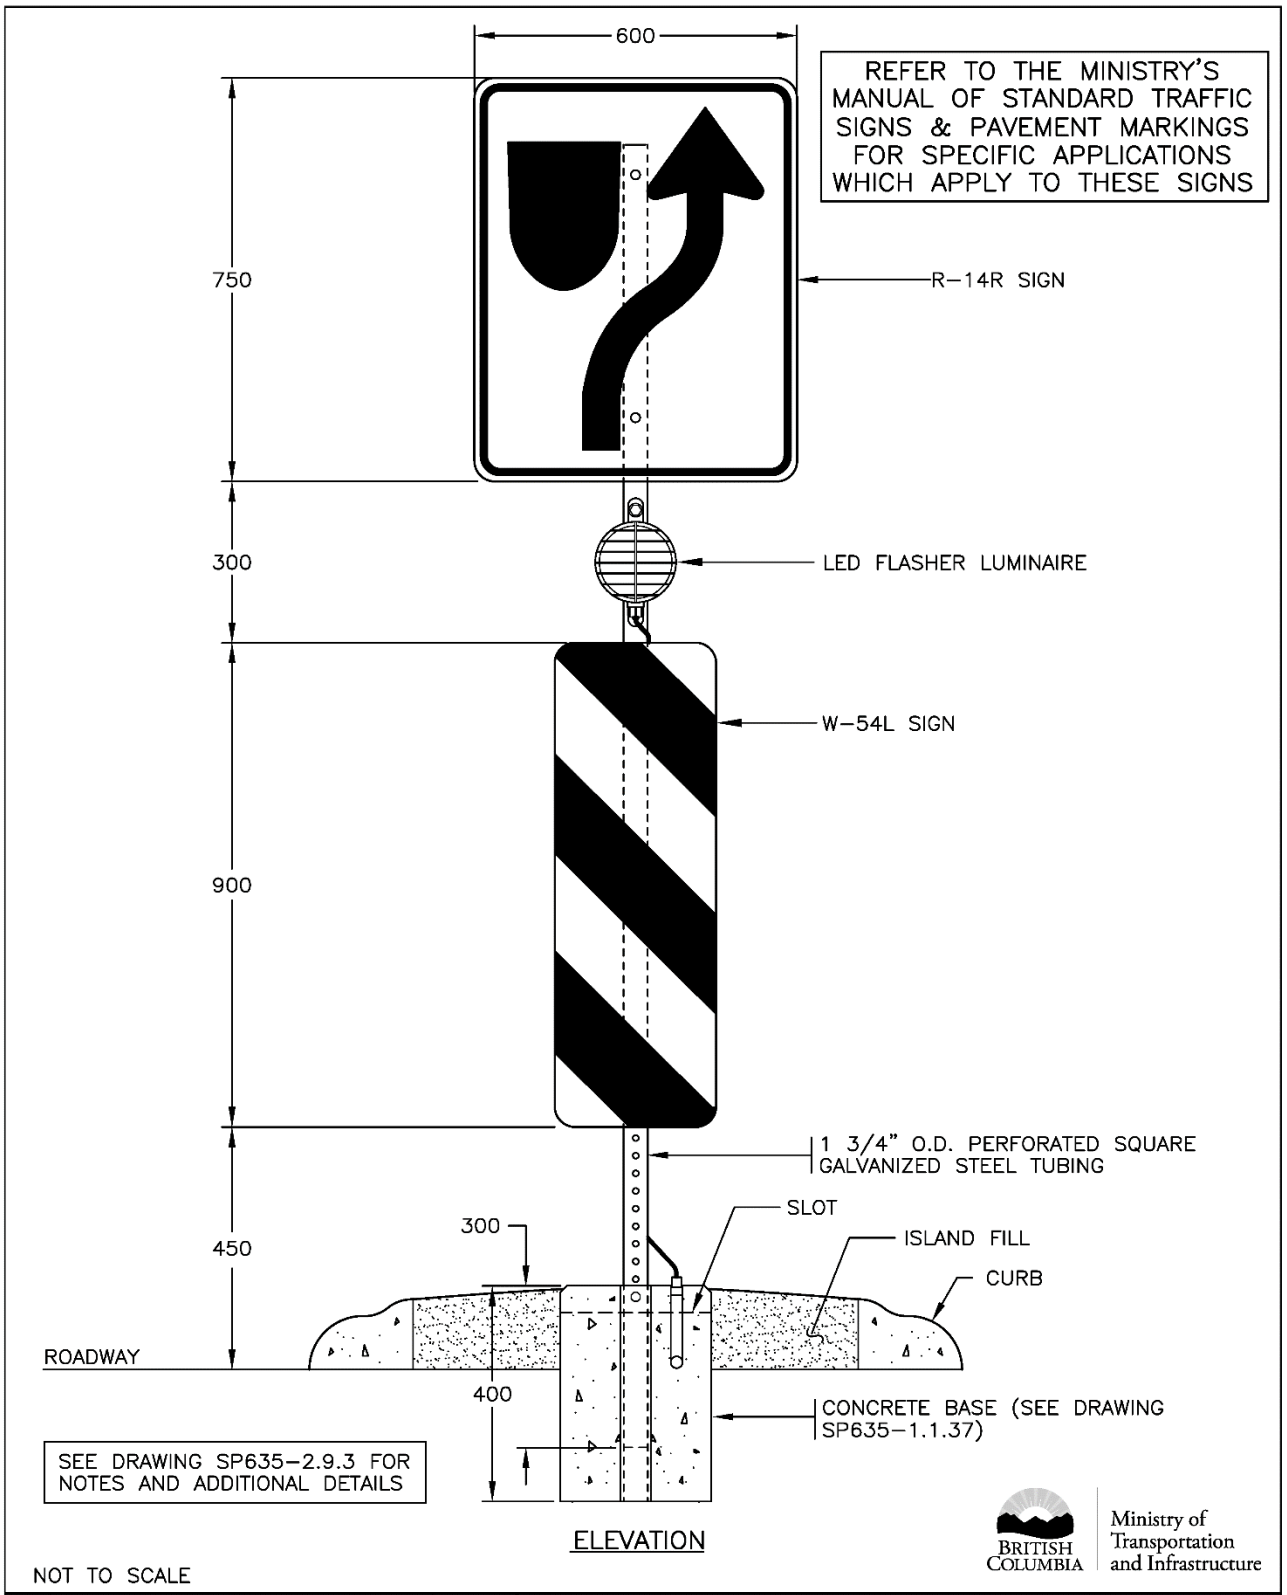

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 20
C	GENERAL REVISIONS	APR 17
B	CONCRETE BASE DRAWING REFERENCE REVISED	AUG 96
A	GENERAL REVISIONS	AUG 94

FLASHER LUMINAIRE INSTALLATION DETAILS ON PERFORATED SQUARE STEEL TUBING (2 SIGNS)


Date Approved

MAR 94 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-2.9.2

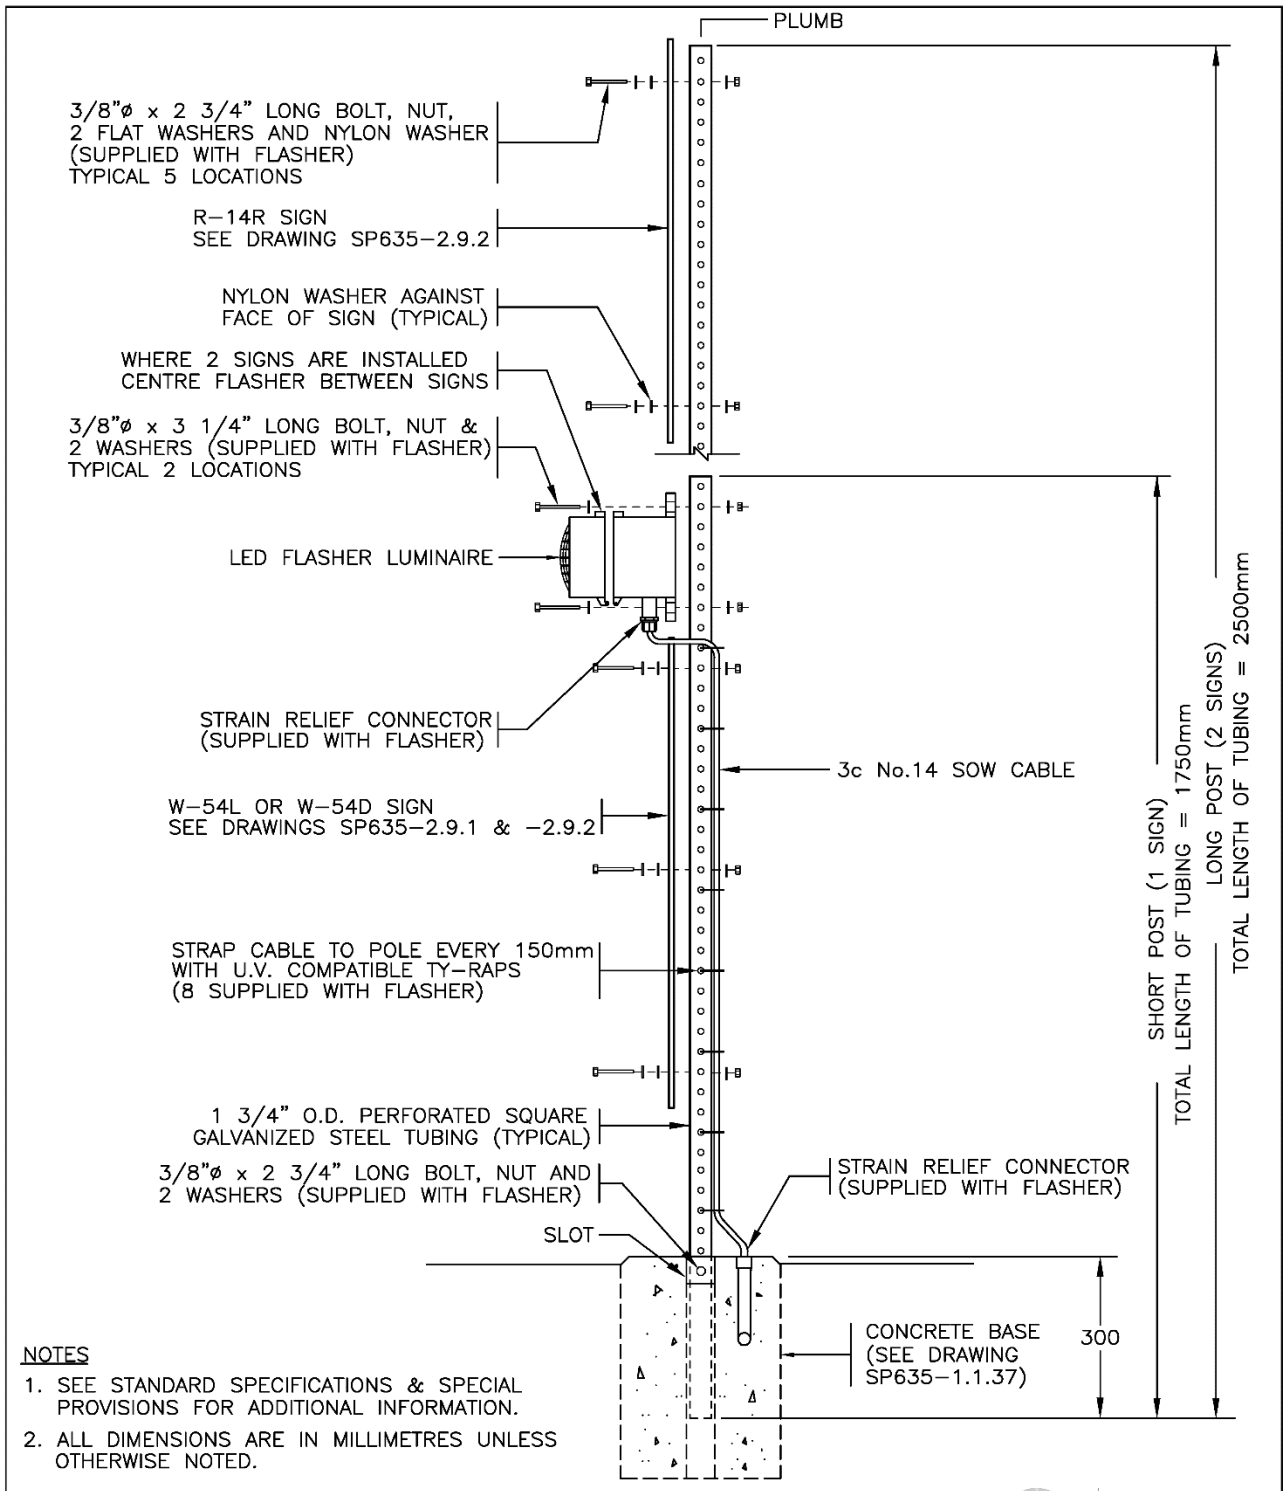

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

SIDE VIEW

NOT TO SCALE

BRITISH COLUMBIA — Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	GENERAL REVISIONS	APR 20
C	GENERAL REVISIONS	APR 17
B	3c No.14 CABLE NOT SUPPLIED WITH FLASHER	AUG 96
A	GENERAL REVISIONS	AUG 94

FLASHER LUMINAIRE INSTALLATION DETAILS ON PERFORATED SQUARE STEEL TUBING


Date Approved

MAR 94 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.9.3

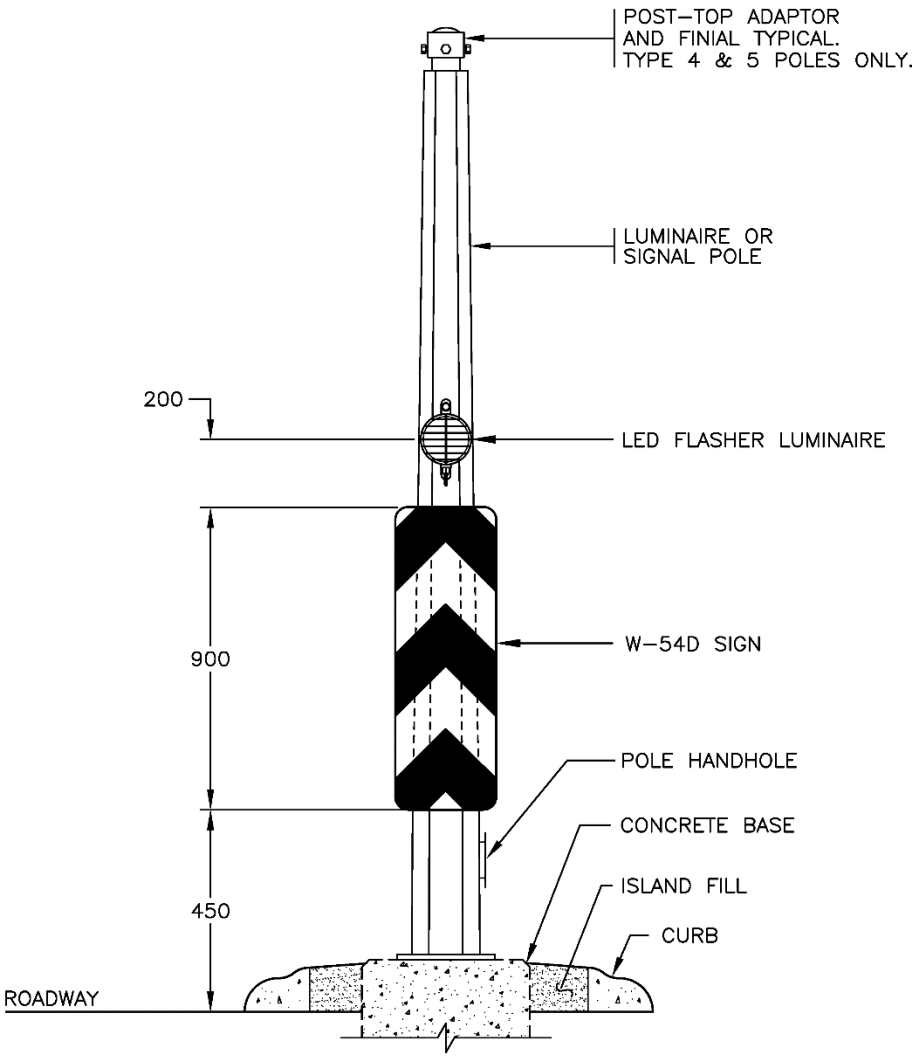

ELEVATION

REFER TO THE MINISTRY'S MANUAL OF STANDARD TRAFFIC SIGNS & PAVEMENT MARKINGS FOR APPLICATIONS WHICH APPLY TO THIS SIGN

SEE DRAWING SP635–2.9.6 FOR NOTES AND ADDITIONAL DETAILS

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
F		
E		
D		
C		
B	GENERAL REVISIONS	APR 20
A	GENERAL REVISIONS	APR 17

FLASHER LUMINAIRE INSTALLATION DETAILS ON STEEL POLE (1 SIGN)


Date Approved

18/11/94 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.9.4

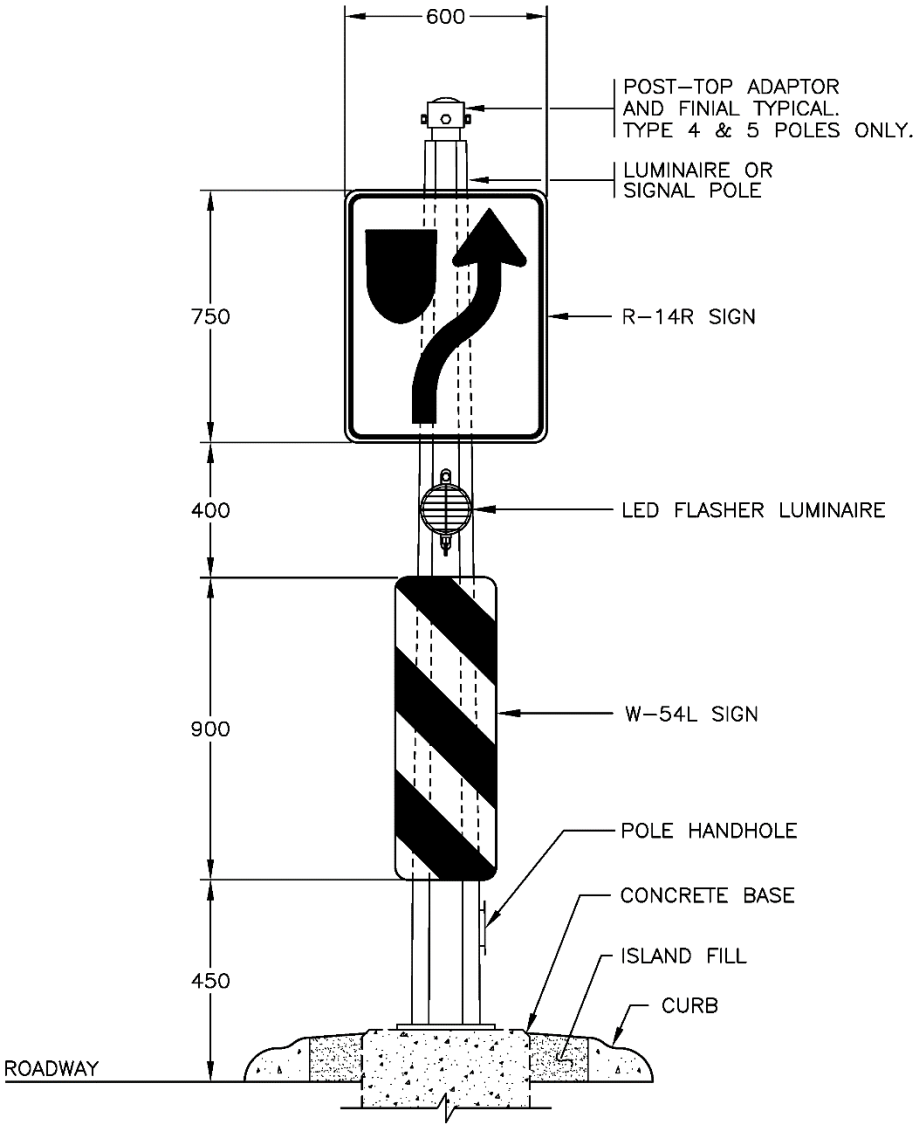

ELEVATION

REFER TO THE MINISTRY'S MANUAL OF STANDARD TRAFFIC SIGNS & PAVEMENT MARKINGS FOR APPLICATIONS WHICH APPLY TO THIS SIGN

SEE DRAWING SP635–2.9.6 FOR NOTES AND ADDITIONAL DETAILS

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
F		
E		
D		
C		
B	GENERAL REVISIONS	APR 20
A	GENERAL REVISIONS	APR 17

FLASHER LUMINAIRE INSTALLATION DETAILS ON STEEL POLE (2 SIGNS)


Date Approved

18/11/94 E.L. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.9.5

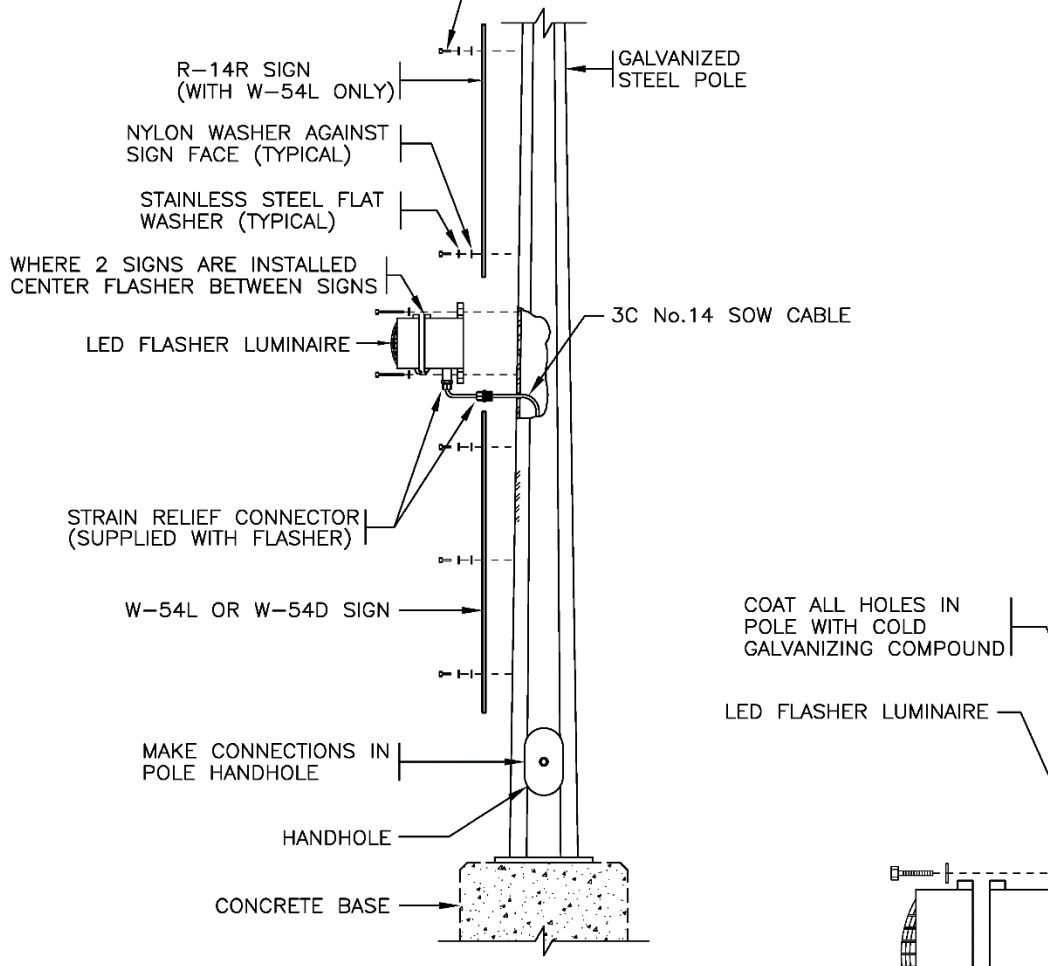

SIDE VIEW

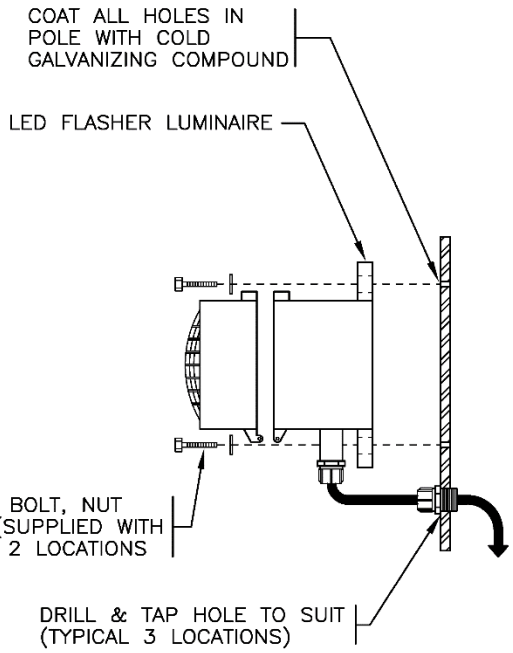

FLASHER LUMINAIRE MOUNTING DETAIL
N.T.S.

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	GENERAL REVISIONS	APR 20
B	GENERAL REVISIONS	APR 17
A	3C No.14 NOT SUPPLIED WITH FLASHER	AUG 96

FLASHER LUMINAIRE INSTALLATION DETAILS ON STEEL POLE


Date Approved

18/11/94 M.C. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635–2.9.6

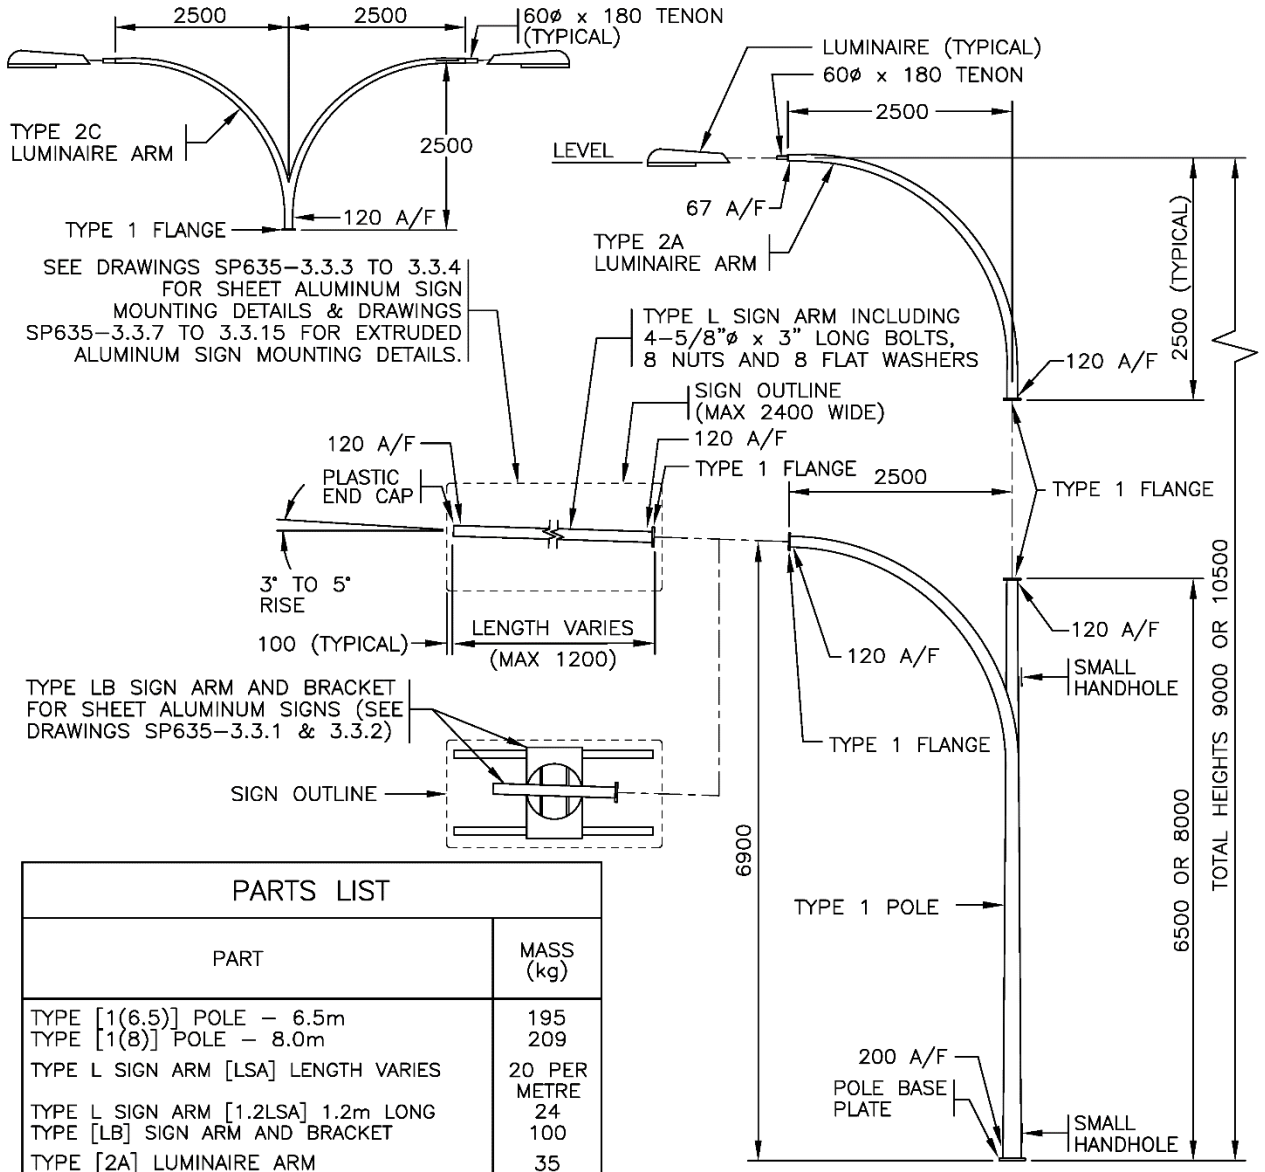

PARTS LIST	
PART	MASS (kg)
TYPE [1(6.5)] POLE – 6.5m	195
TYPE [1(8)] POLE – 8.0m	209
TYPE L SIGN ARM [LSA] LENGTH VARIES	20 PER METRE
TYPE L SIGN ARM [1.2LSA] 1.2m LONG	24
TYPE [LB] SIGN ARM AND BRACKET	100
TYPE [2A] LUMINAIRE ARM	35
TYPE [2C] LUMINAIRE ARM	65
POST TOP TENON [PTT]	5
TYPE 1 FLANGE COVER PLATE [1FCP]	1.5

* [ ] I.D. LABEL ON POLE

ELEVATION

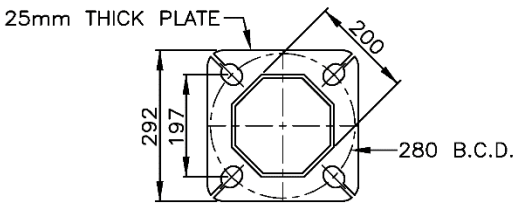

POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635-3.1.2 FOR TYPE 1 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	PLYWOOD SIGN DETAILS REMOVED	APR 20
C	GENERAL REVISIONS	APR 17
B	SHEET ALUMINUM SIGN ADDED	APR 05
A	COUPLING DELETED ON SIGN ARM	NOV 01

TYPE 1 POLE INSTALLATION DETAILS (SIGN POLE)


Date Approved

24/02/97 M.C. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-3.1.1

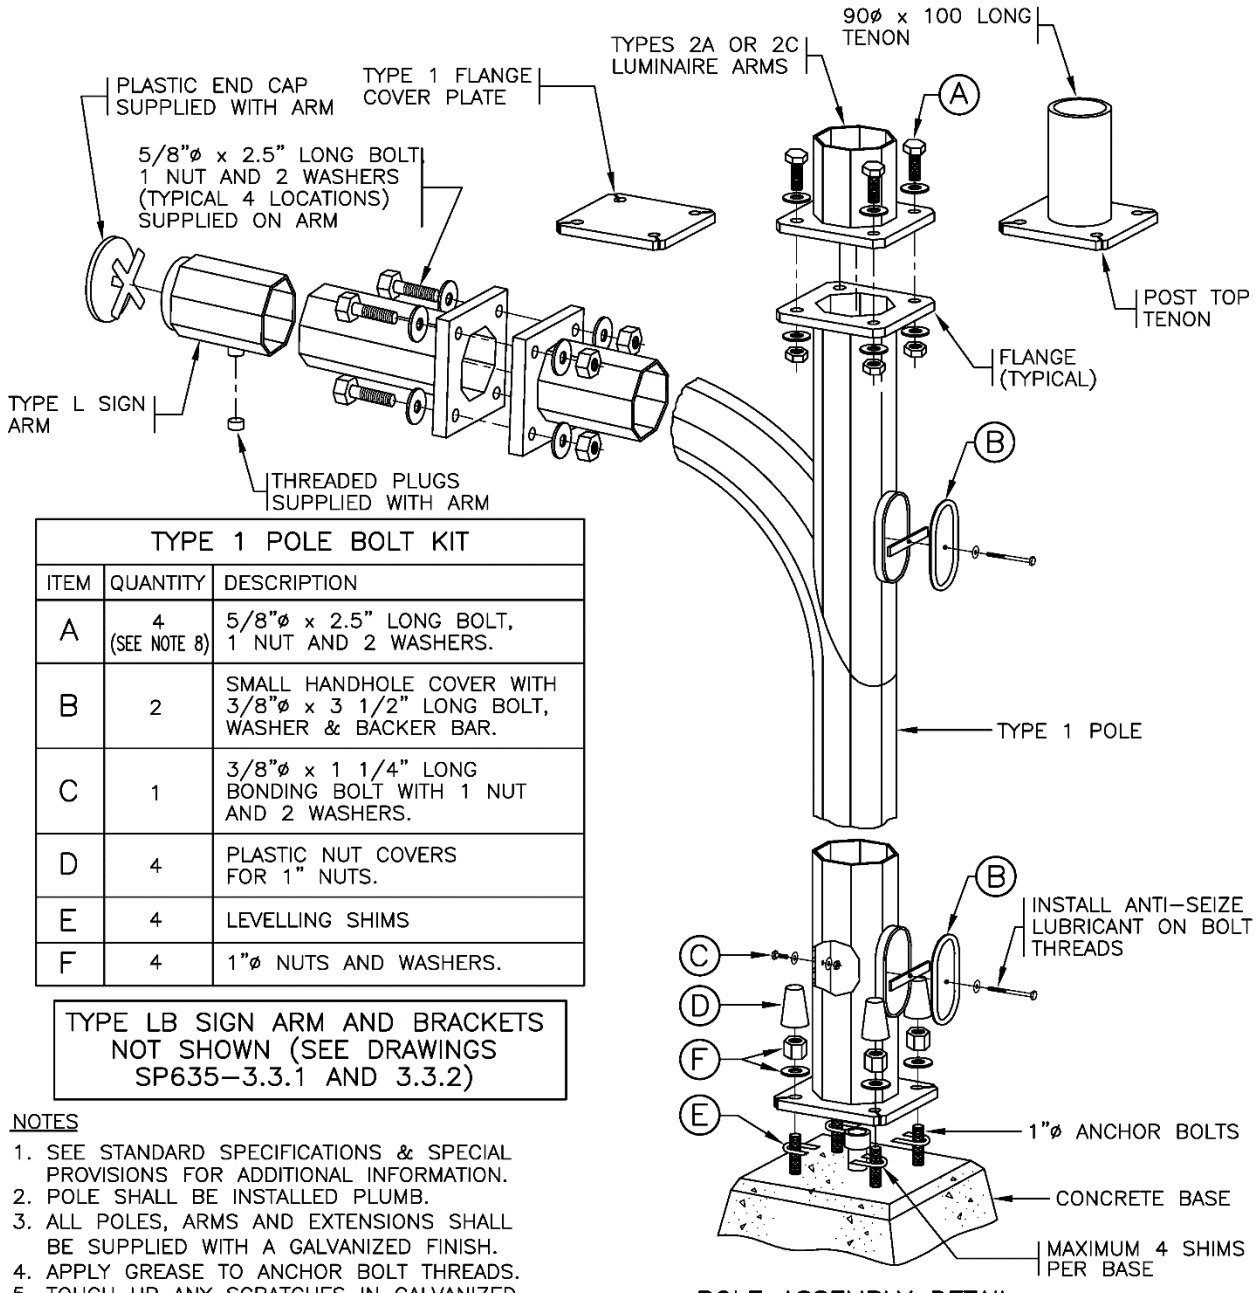

POLE ASSEMBLY DETAIL

TYPE 1 POLE BOLT KIT		
ITEM	QUANTITY	DESCRIPTION
A	4 (SEE NOTE 8)	5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS.
B	2	SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER & BACKER BAR.
C	1	3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS.
D	4	PLASTIC NUT COVERS FOR 1" NUTS.
E	4	LEVELLING SHIMS
F	4	1"ø NUTS AND WASHERS.

TYPE LB SIGN ARM AND BRACKETS NOT SHOWN (SEE DRAWINGS SP635-3.3.1 AND 3.3.2)

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. 4 EXTRA BOLTS, AS BOLTS ARE SUPPLIED WITH SIGN ARM.
7. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
8. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN-OF-NUT" METHOD SPECIFIED IN CSA S6.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
D	GENERAL REVISIONS	APR 20
C	GENERAL REVISIONS	APR 17
B	TYPE 1 FLANGE BOLTS CHANGED TO A325 & QTY. CHANGED TO 4	DEC 10
A	ANTI-SEIZING LUBRICANT NOTED ON HANDHOLE BOLT	NOV 98

TYPE 1 POLE INSTALLATION DETAILS (SIGN POLE)


Date Approved

24/02/97 M.C. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635-3.1.2

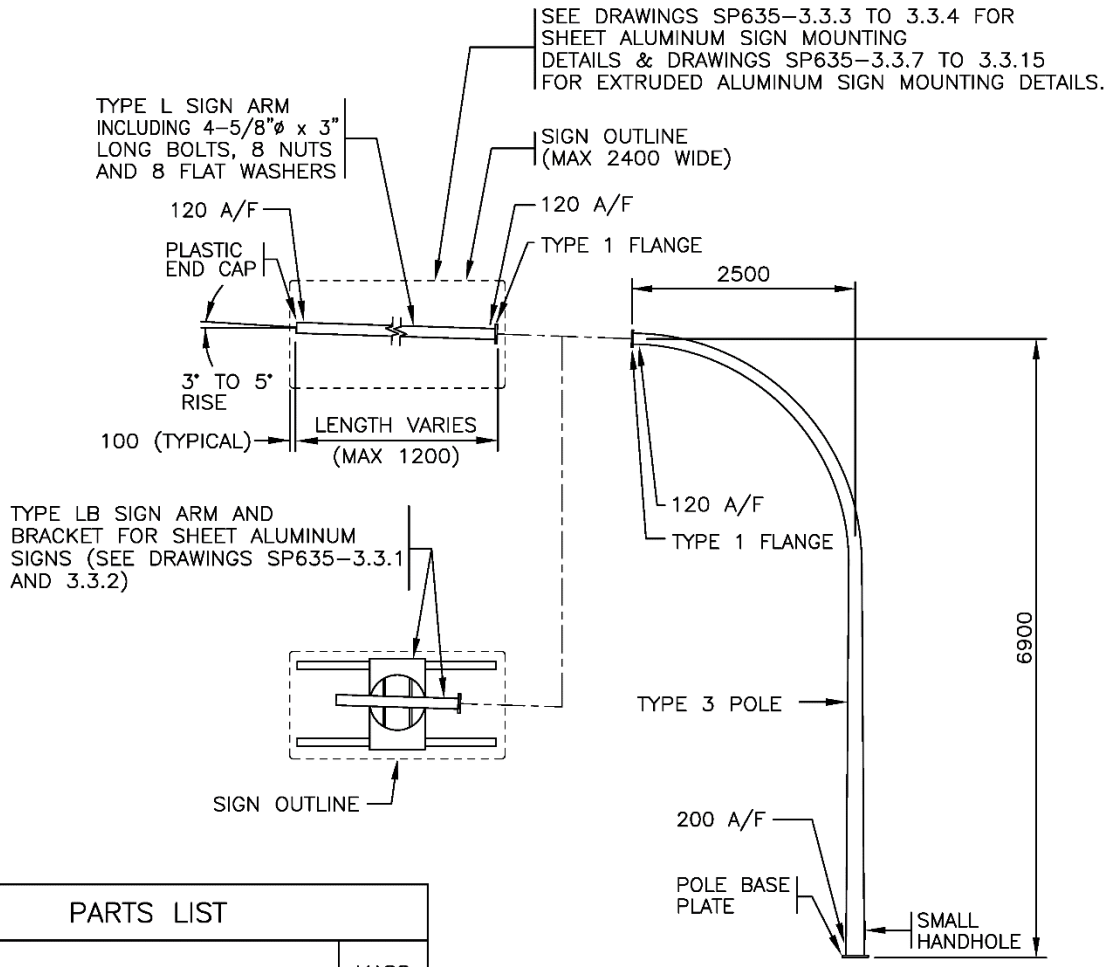

ELEVATION

PARTS LIST	
PART	MASS (kg)
TYPE [3] POLE	186
TYPE L SIGN ARM [LSA] LENGTH VARIES	20 PER METRE
TYPE L SIGN ARM [1.2LSA] 1.2m LONG	24
TYPE [LB] SIGN ARM AND BRACKET	100

* [ ] I.D. LABEL ON POLE

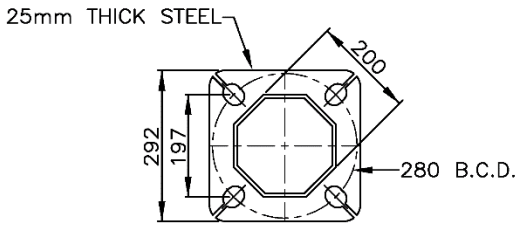

POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–3.1.4 FOR TYPE 3 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D	PLYWOOD SIGN DETAILS REMOVED	APR 20
C	GENERAL REVISIONS	APR 17
B	SHEET ALUMINUM SIGN ADDED	APR 05
A	COUPLING DELETED ON SIGN ARM	NOV 01

TYPE 3 POLE INSTALLATION DETAILS (SIGN POLE)


Date Approved

24/02/97 M.C. **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–3.1.3

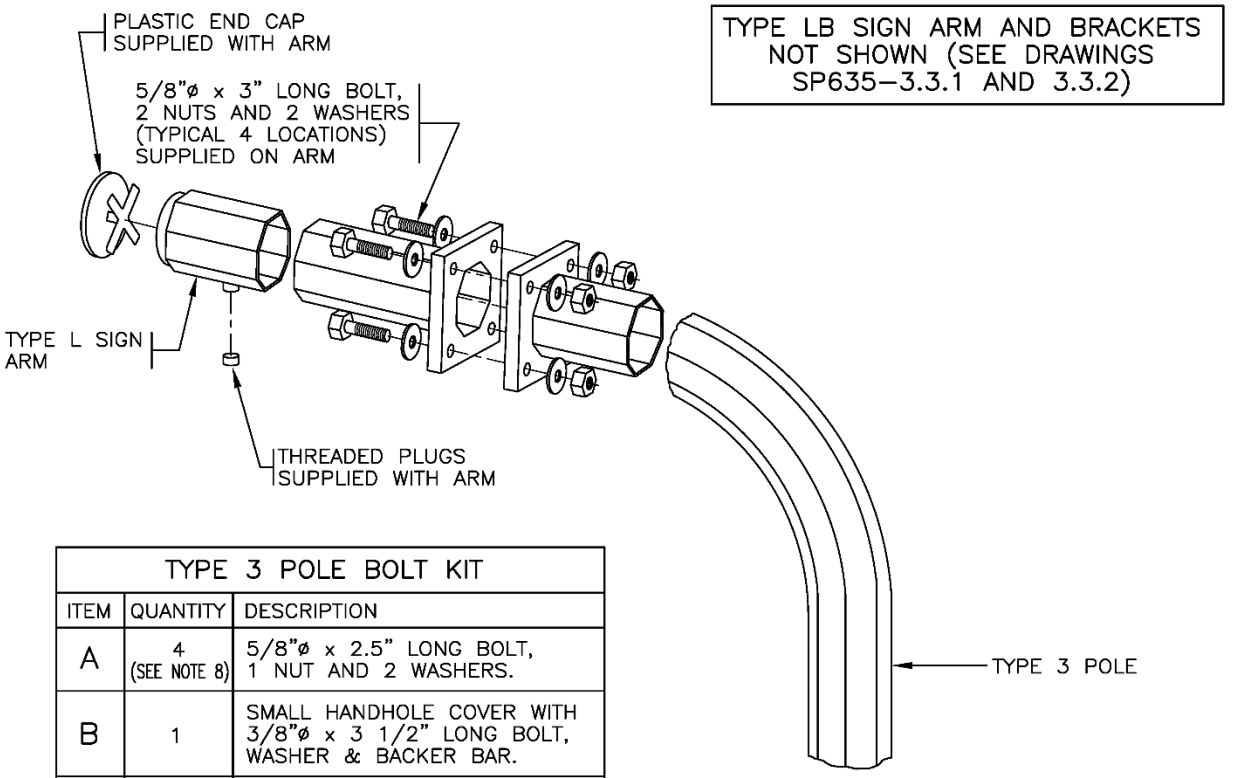

TYPE 3 POLE BOLT KIT		
ITEM	QUANTITY	DESCRIPTION
A	4 (SEE NOTE 8)	5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS.
B	1	SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER & BACKER BAR.
C	1	3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS.
D	4	PLASTIC NUT COVERS FOR 1" NUTS.
E	4	LEVELLING SHIMS.
F	4	1"ø NUTS AND WASHERS.

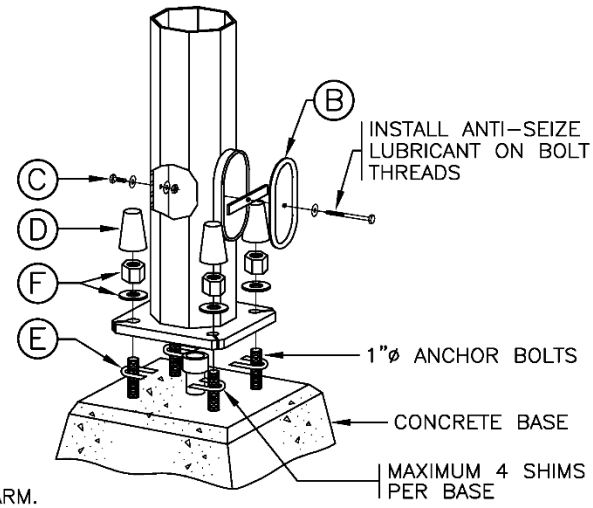

POLE ASSEMBLY DETAIL

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. 4 EXTRA BOLTS, AS BOLTS ARE SUPPLIED WITH SIGN ARM.
7. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
8. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN-OF-NUT" METHOD SPECIFIED IN CSA S6.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

No.	Revision	Date
D	GENERAL REVISIONS	APR 20
C	GENERAL REVISIONS	APR 17
B	TYPE 1 FLANGE BOLTS CHANGED TO A325 & QTY. CHANGED TO 4	DEC 10
A	ANTI-SEIZING LUBRICANT NOTED ON HANDHOLE BOLT	NOV 98

TYPE 3 POLE INSTALLATION DETAILS (SIGN POLE)


Date Approved

24/02/97 M.C. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-3.1.4

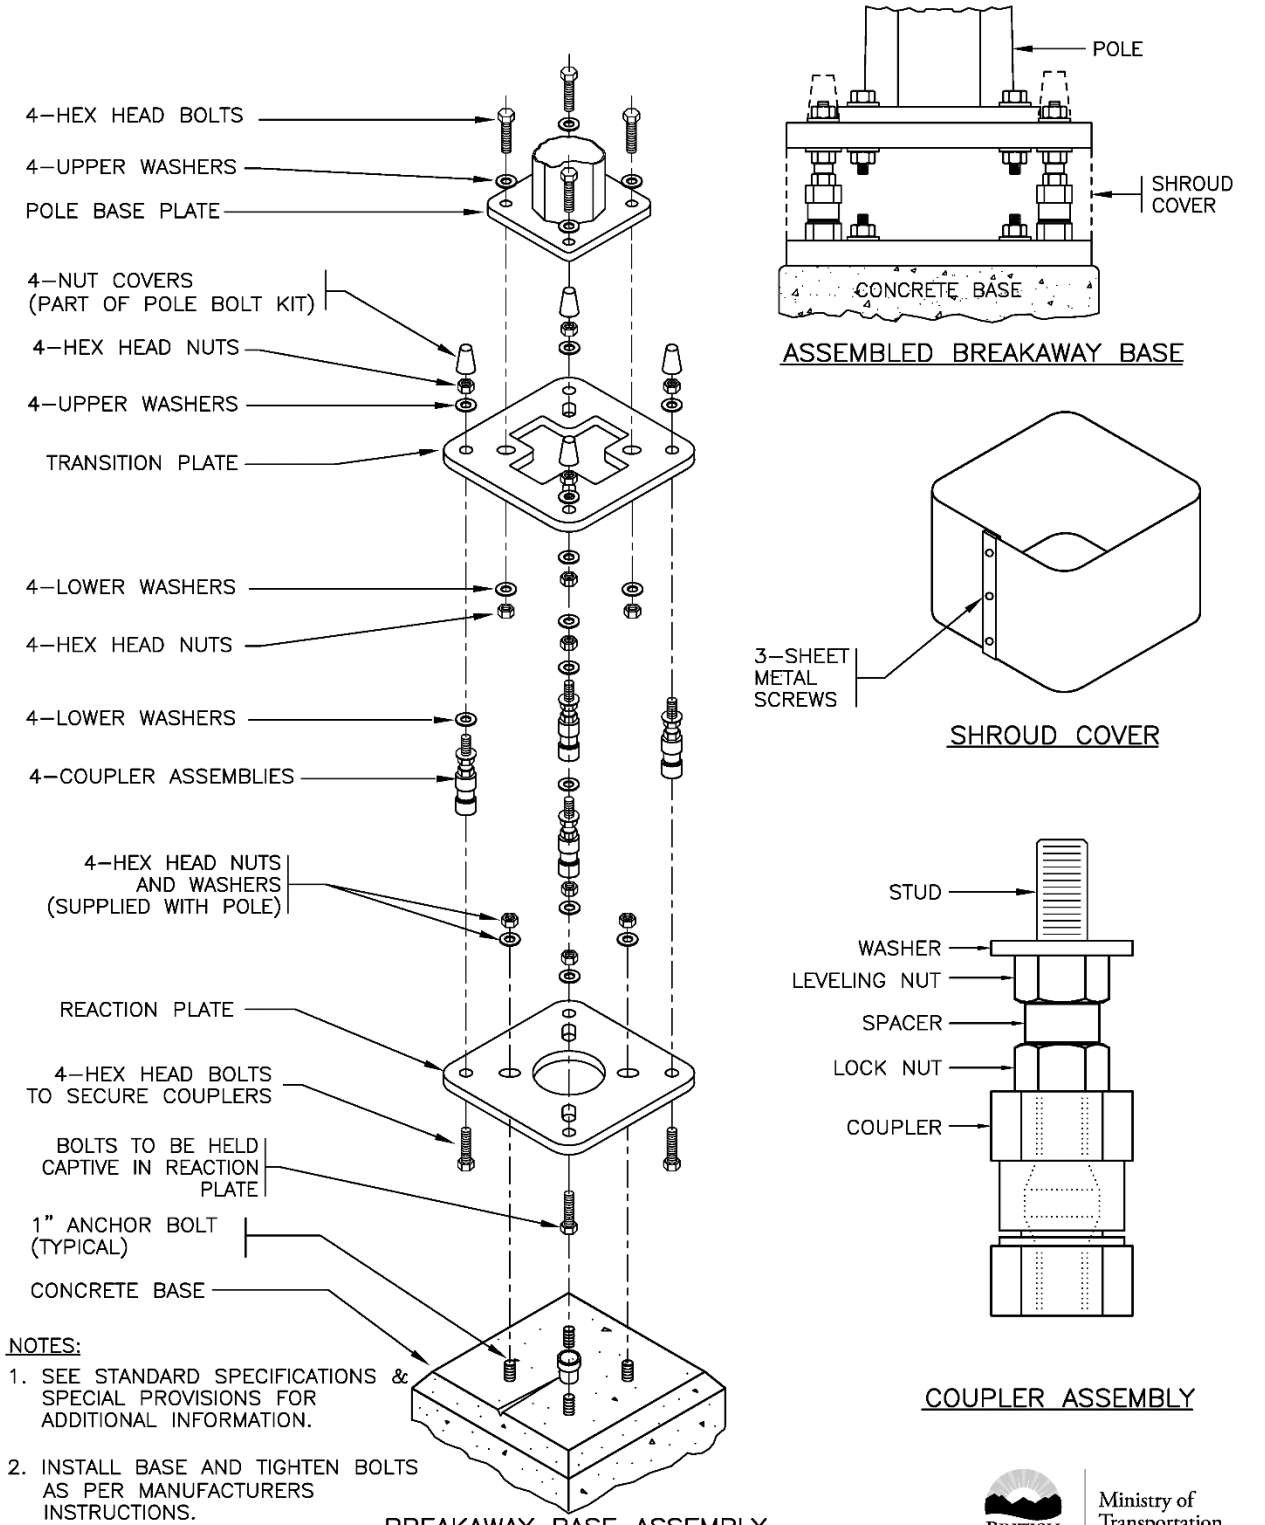

NOTES:

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. INSTALL BASE AND TIGHTEN BOLTS AS PER MANUFACTURERS INSTRUCTIONS.

BREAKAWAY BASE ASSEMBLY

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C		
B		
A	GENERAL REVISIONS	APR 17

BREAKAWAY BASE FOR ADVANCED WARNING AND DIRECTIONAL SIGNS ON TYPE 1 AND 3 POLES


Date Approved

24/02/97 M.C. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635–3.1.5

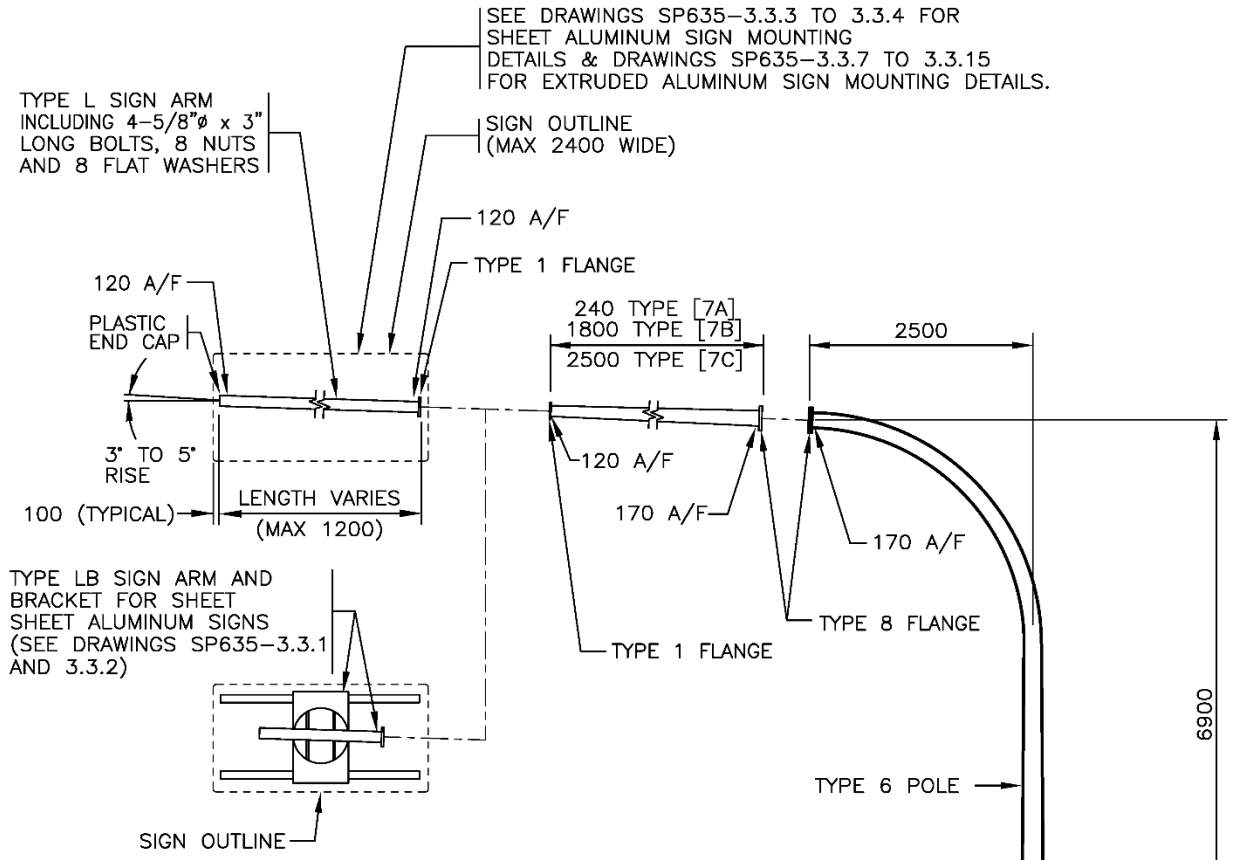

ELEVATION

PARTS LIST	
PART	MASS (kg)
TYPE [6] POLE	412
TYPE L SIGN ARM [LSA] LENGTH VARIES	20 PER METRE
TYPE L SIGN ARM [1.2LSA] 1.2m LONG	24
TYPE [LB] SIGN ARM AND BRACKET	100
TYPE [7A] EXTENSION – 0.24m	20
TYPE [7B] EXTENSION – 1.8m	69
TYPE [7C] EXTENSION – 2.5m	86
TYPE 1 FLANGE COVER PLATE [1FCP]	1.5
TYPE 8 FLANGE COVER PLATE [8FCP]	2.5

* [ ] I.D. LABEL ON POLE

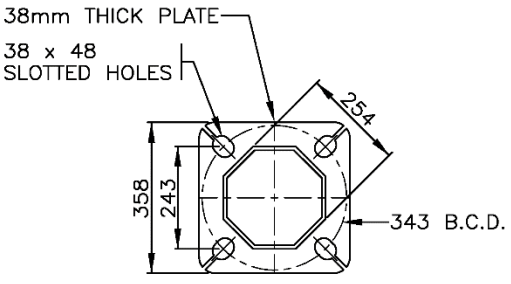

POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–3.1.7 FOR TYPE 6 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

Ministry of Transportation and Infrastructure
BRITISH COLUMBIA

No.	Revision	Date
G	PLYWOOD SIGN DETAILS REMOVED	APR 20
F	GENERAL REVISIONS	APR 17
E	SHEET ALUMINUM SIGN ADDED	APR 05
D	COUPLING DELETED ON SIGN ARM	NOV 01
C	L SIGN ARM & DRAWING No. REVISED	AUG 96
B	L SIGN ARM MAX LENGTH & PLATE HOLE SIZE ADDED	AUG 95

TYPE 6 POLE INSTALLATION DETAILS (SIGN POLE)


Date Approved

30/09/93 E.L. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–3.1.6

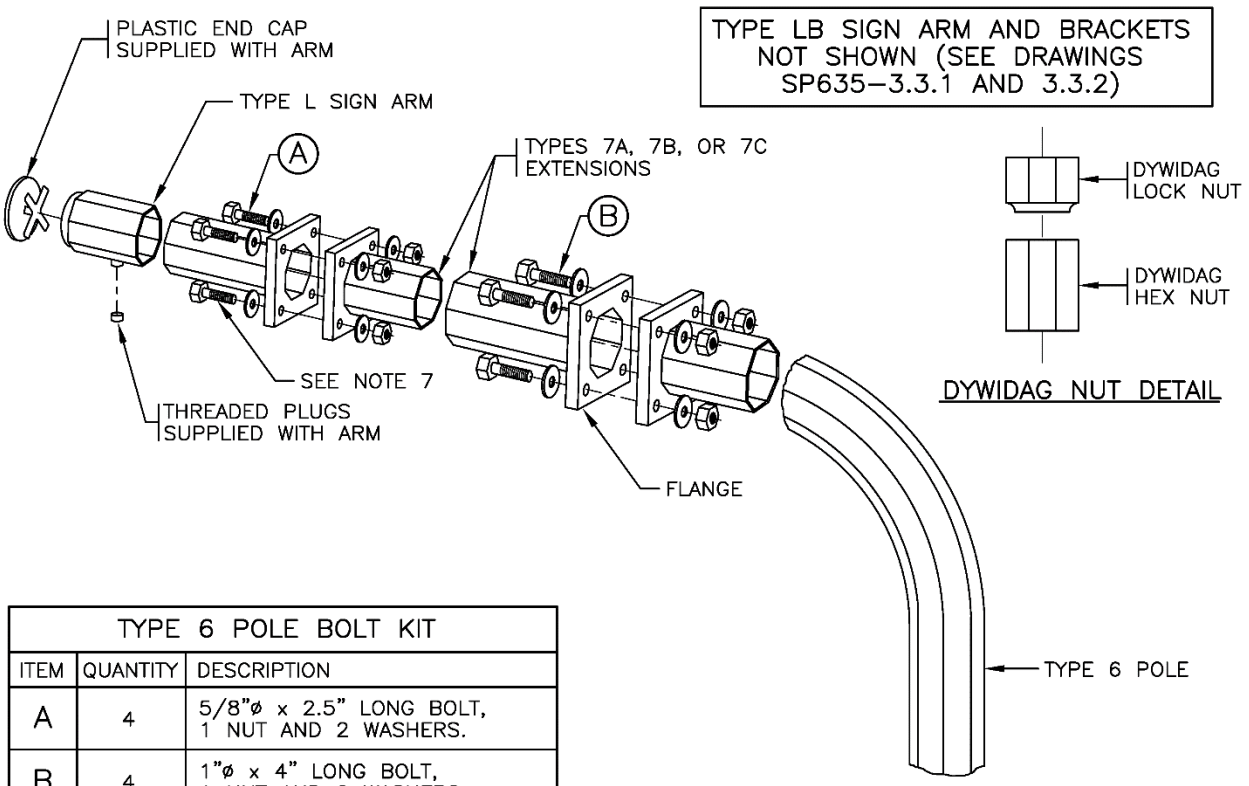

TYPE 6 POLE BOLT KIT		
ITEM	QUANTITY	DESCRIPTION
A	4	5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS.
B	4	1"ø x 4" LONG BOLT, 1 NUT AND 2 WASHERS.
C	1	LARGE HANDHOLE COVER WITH 2–3/8"ø x 1" LONG BOLTS AND 2 WASHERS.
D	1	3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS.
E	4	LEVELLING SHIMS.

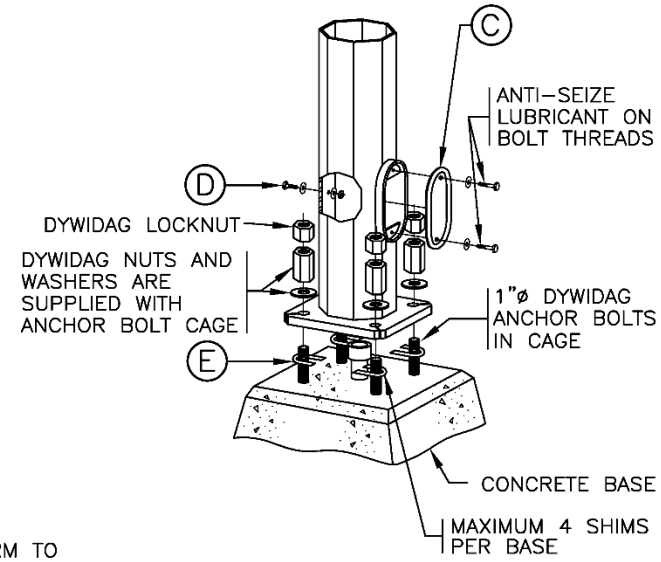

POLE ASSEMBLY DETAIL

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
7. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN–OF–NUT" METHOD SPECIFIED IN CSA S6.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure


NOT TO SCALE

No.	Revision	Date
F	GENERAL REVISIONS	APR 20
E	TYPE 1 & 8 FLANGE BOLTS CHANGED TO A325	DEC 10
D	ANTI–SEIZE LUBRICANT NOTED ON HANDHOLE BOLT	NOV 98
C	DRAWING NUMBER REVISED	AUG 96
B	END CAP SUPPLIED ON L SIGN ARM	AUG 95

TYPE 6 POLE INSTALLATION DETAILS (SIGN POLE)

Date Approved: **30/09/93 E.L. (Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–3.1.7

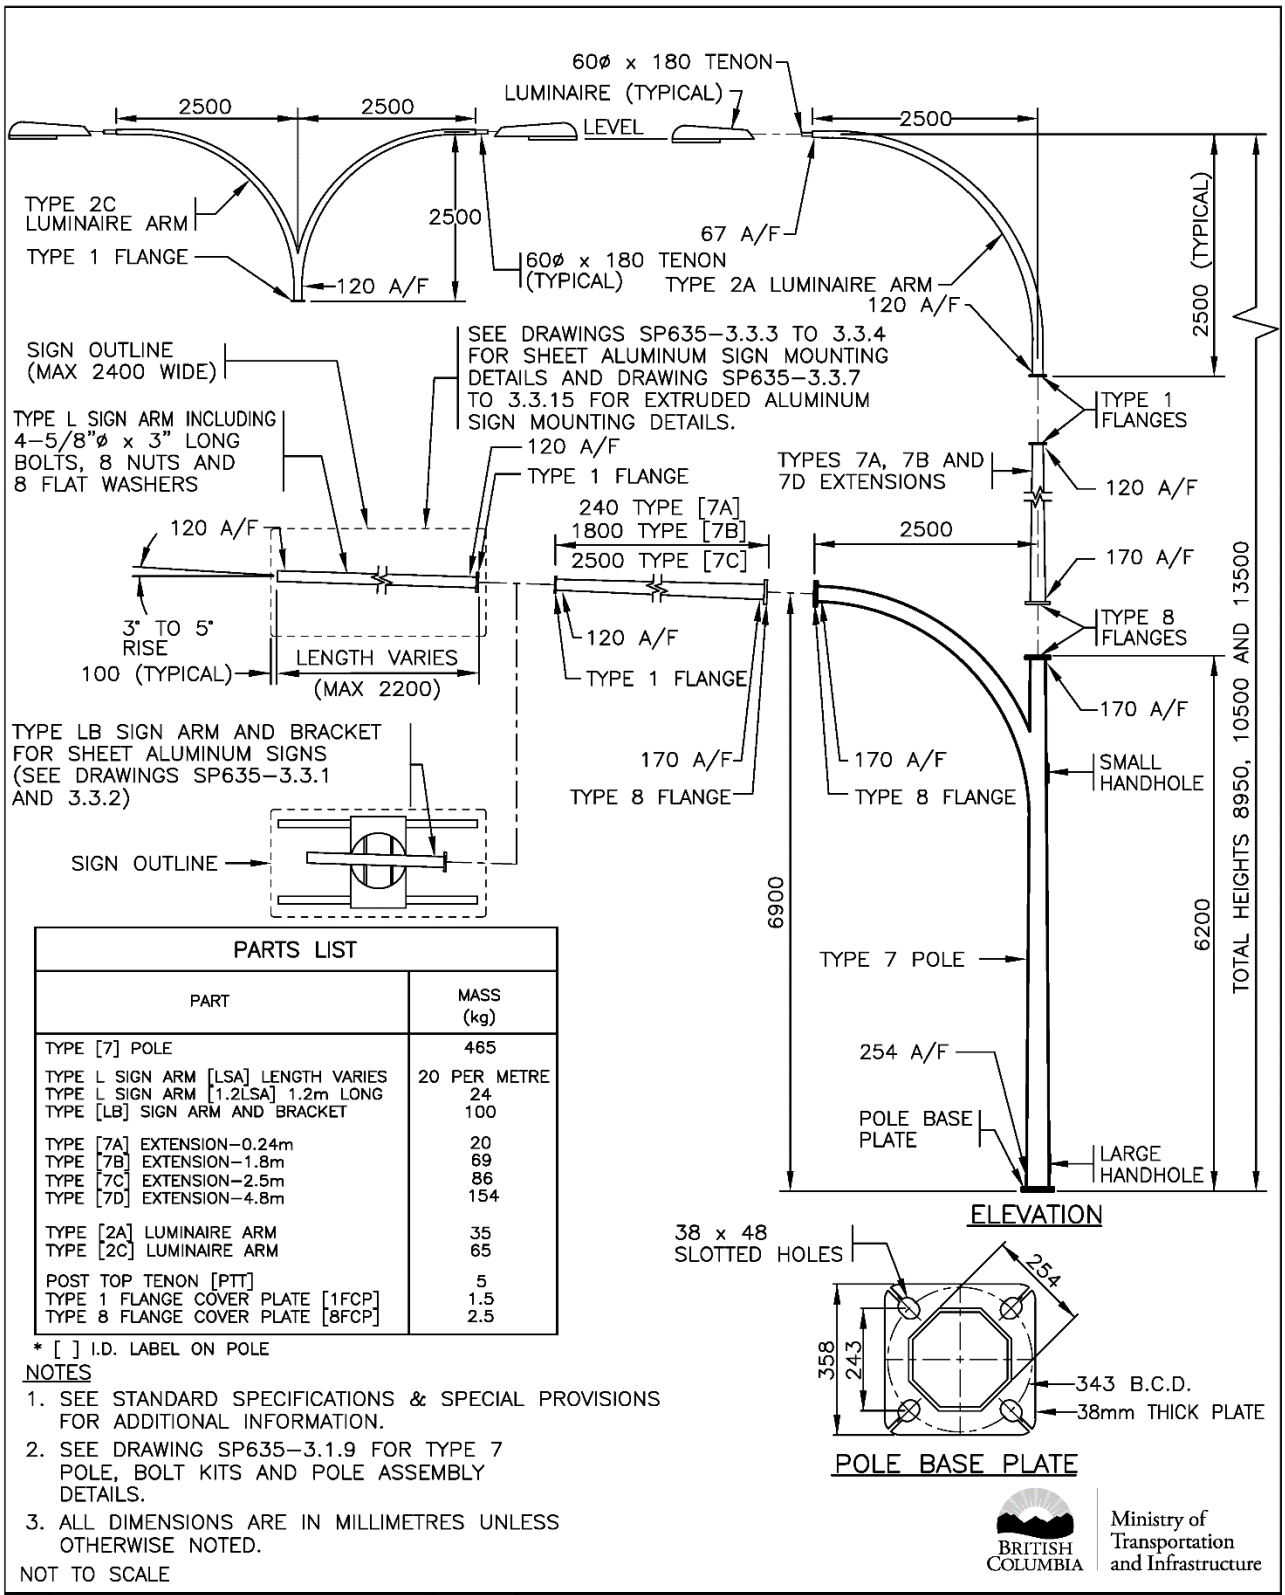

PARTS LIST	
PART	MASS (kg)
TYPE [7] POLE	465
TYPE L SIGN ARM [LSA] LENGTH VARIES	20 PER METRE
TYPE L SIGN ARM [1.2LSA] 1.2m LONG	24
TYPE [LB] SIGN ARM AND BRACKET	100
TYPE [7A] EXTENSION–0.24m	20
TYPE [7B] EXTENSION–1.8m	69
TYPE [7C] EXTENSION–2.5m	86
TYPE [7D] EXTENSION–4.8m	154
TYPE [2A] LUMINAIRE ARM	35
TYPE [2C] LUMINAIRE ARM	65
POST TOP TENON [PTT]	5
TYPE 1 FLANGE COVER PLATE [1FCP]	1.5
TYPE 8 FLANGE COVER PLATE [8FCP]	2.5

* [ ] I.D. LABEL ON POLE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–3.1.9 FOR TYPE 7 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA — Ministry of Transportation and Infrastructure

No.	Revision	Date
G	PLYWOOD SIGN DETAILS REMOVED	APR 20
F	GENERAL REVISIONS	APR 17
E	SHEET ALUMINUM SIGN ADDED	APR 05
D	COUPLING DELETED ON SIGN ARM	NOV 01
C	L SIGN ARM & DRAWING No. REVISED	AUG 96
B	L SIGN ARM MAX LENGTH & 7C EXT. ADDED	AUG 95

TYPE 7 POLE INSTALLATION DETAILS (SIGN POLE)

Date Approved


30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–3.1.8

TYPE LB SIGN ARM AND BRACKETS NOT SHOWN (SEE DRAWINGS SP635–3.3.1 AND 3.3.2)

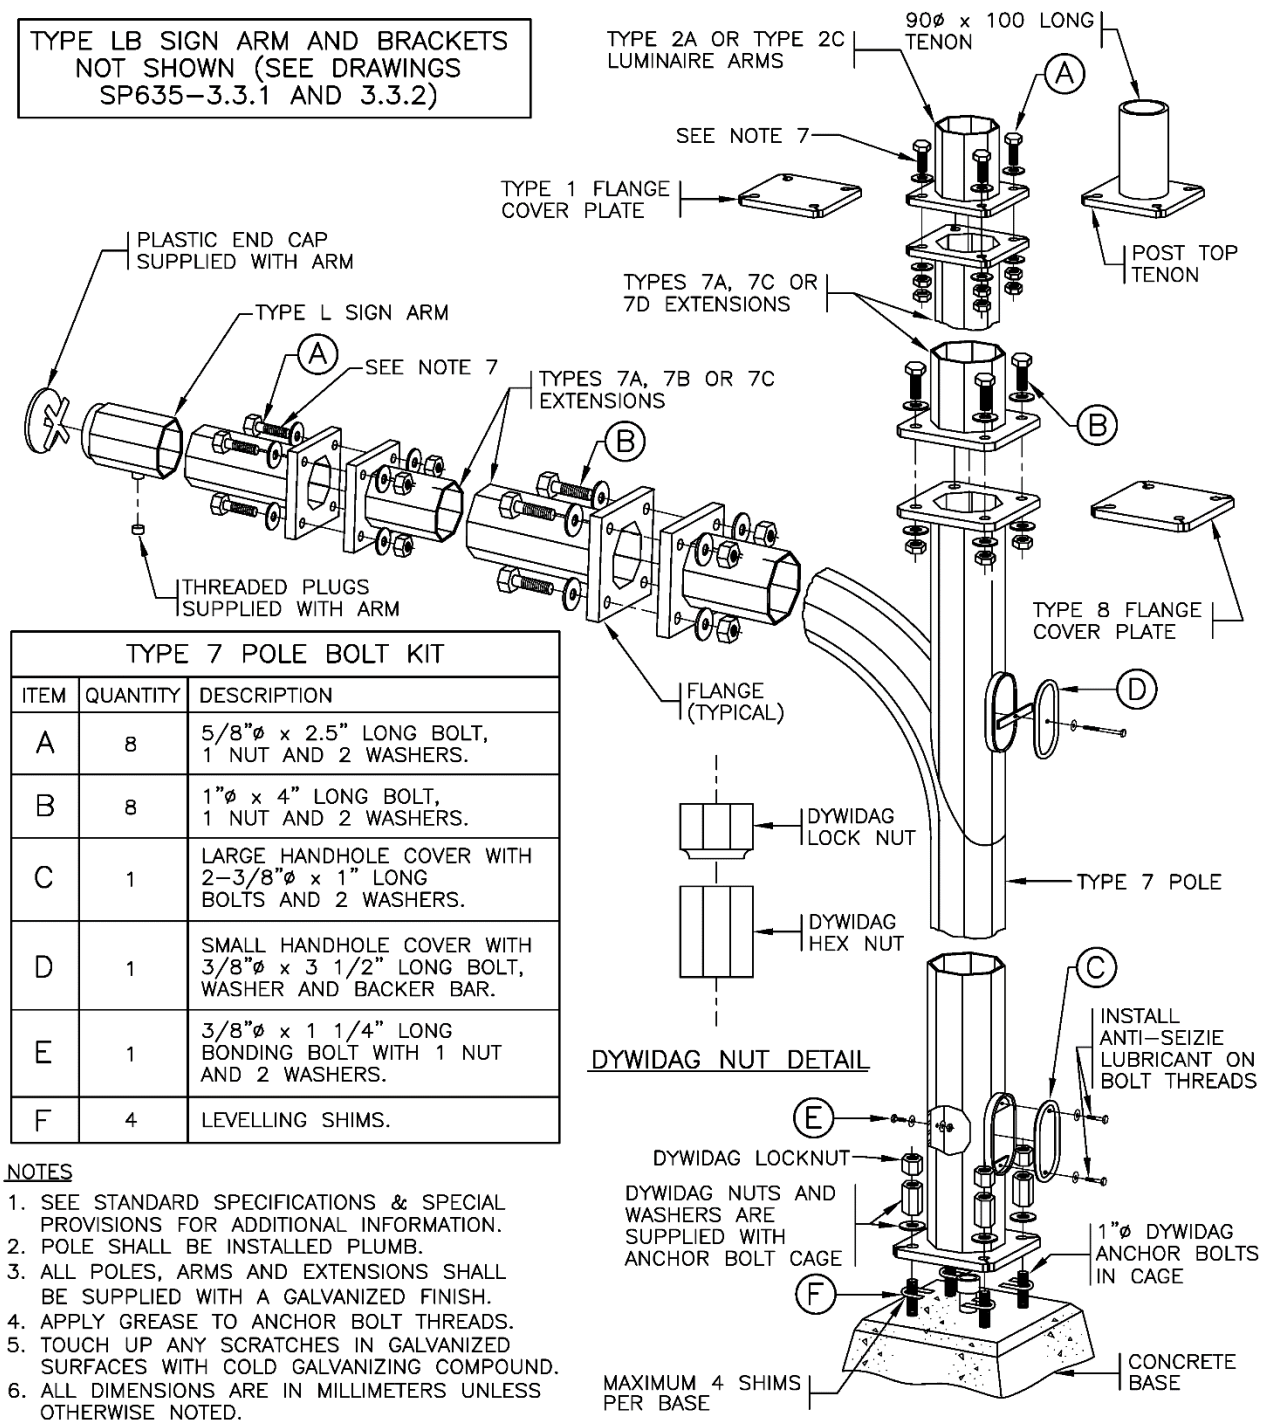

DYWIDAG NUT DETAIL

POLE ASSEMBLY DETAIL

TYPE 7 POLE BOLT KIT		
ITEM	QUANTITY	DESCRIPTION
A	8	5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS.
B	8	1"ø x 4" LONG BOLT, 1 NUT AND 2 WASHERS.
C	1	LARGE HANDHOLE COVER WITH 2–3/8"ø x 1" LONG BOLTS AND 2 WASHERS.
D	1	SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER AND BACKER BAR.
E	1	3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS.
F	4	LEVELLING SHIMS.

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
7. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN–OF–NUT" METHOD SPECIFIED IN CSA S6.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

No.	Revision	Date
G	GENERAL REVISIONS	APR 20
F	GENERAL REVISIONS	APR 17
E	TYPE 1 & 8 FLANGE BOLTS CHANGED TO A325	DEC 10
D	ANTI–SEIZE LUBRICANT NOTED ON HANDHOLE BOLT	NOV 98
C	SMALL HANDHOLE BOLT LENGTH & DRAWING No. REV'D	AUG 96

TYPE 7 POLE INSTALLATION DETAILS (SIGN POLE)


Date Approved

30/09/93 E.L. **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–3.1.9

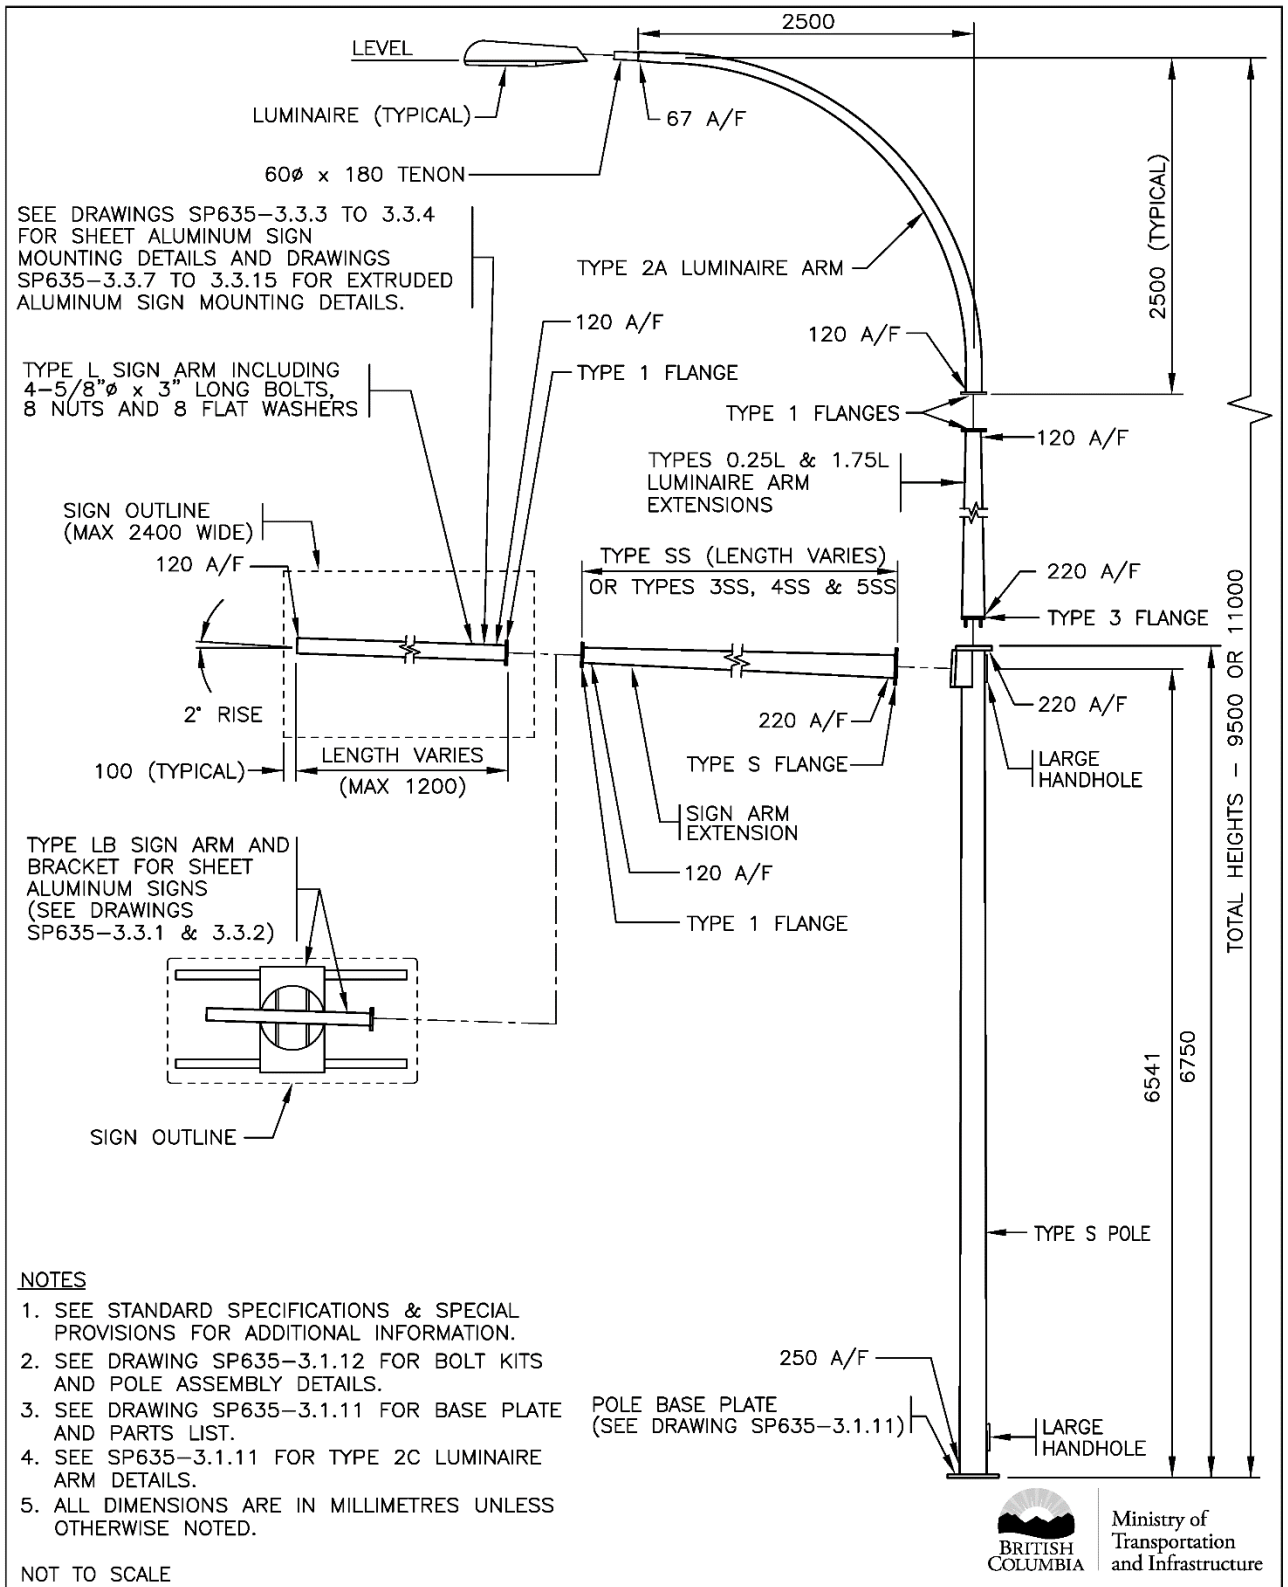

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635-3.1.12 FOR BOLT KITS AND POLE ASSEMBLY DETAILS.
3. SEE DRAWING SP635-3.1.11 FOR BASE PLATE AND PARTS LIST.
4. SEE SP635-3.1.11 FOR TYPE 2C LUMINAIRE ARM DETAILS.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE


BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	PLYWOOD SIGN DETAILS REMOVED & NEW DRAWING NUMBER	APR 20
B	GENERAL REVISIONS	APR 17
A	SHEET ALUMINUM SIGN ADDED	APR 05


TYPE S SIGN POLE INSTALLATION DETAILS

Date: **14/11/03** Approved: **D.N. (Signature on File)**
Chief Engineer

SPECIFICATION DRAWING No.
SP635-3.1.10

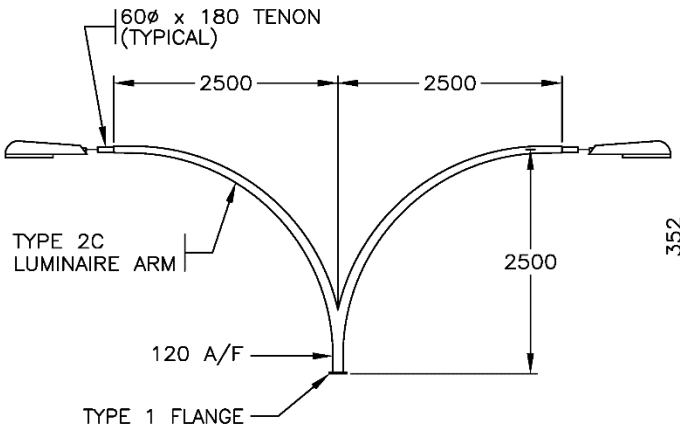

TYPE 2C LUMINAIRE ARM DETAILS

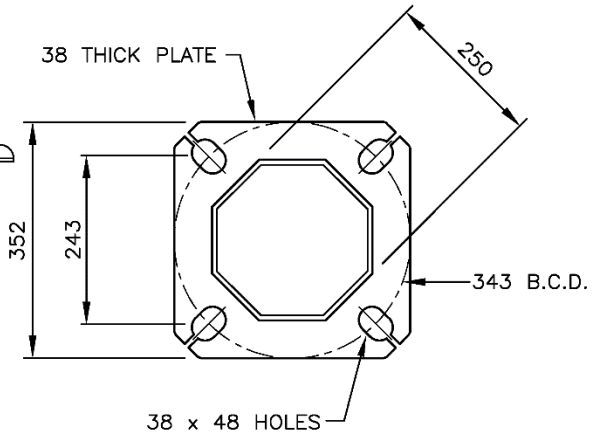

TYPE S POLE BASE PLATE

PARTS LIST FOR TYPE S SIGN POLE	
PART	MASS (kg)
TYPE [S] POLE	385
TYPE L SIGN ARM [LSA] LENGTH VARIES	20 PER METRE
TYPE L SIGN ARM [1.2LSA] 1.2m LONG	24
TYPE [LB] SIGN ARM AND BRACKETS	100
TYPE [SS] SIGN ARM EXTENSION – LENGTH VARIES	45 PER METRE
TYPE [3SS] SIGN ARM EXTENSION – 3.0m	135
TYPE [4SS] SIGN ARM EXTENSION – 4.0m	180
TYPE [5SS] SIGN ARM EXTENSION – 5.0m	225
TYPE [1.75L] LUMINAIRE ARM EXTENSION – 1.75m	29
TYPE [0.25L] LUMINAIRE ARM EXTENSION – 0.25m	10
TYPE [2A] LUMINAIRE ARM	35
TYPE [2C] LUMINAIRE ARM	65
TYPE 1 FLANGE COVER PLATE [1FCP]	1.5
TYPE S FLANGE COVER PLATE [SFCP]	3
TYPE 3 FLANGE COVER PLATE [3FCP]	4
POST TOP TENON [PTT]	5

* [ ] I.D. LABEL ON POLE

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure


No.	Revision	Date
F		
E		
D		
C		
B	NEW DRAWING NUMBER	APR 20
A	GENERAL REVISIONS	APR 17

TYPE S SIGN POLE
INSTALLATION DETAILS

Date 14/11/03 Approved D.N. (Signature on File) Chief Engineer

SPECIFICATION DRAWING No.
SP635–3.1.11

TYPE LB SIGN ARM AND BRACKETS NOT SHOWN (SEE DRAWINGS SP635–3.3.1 AND 3.3.2)

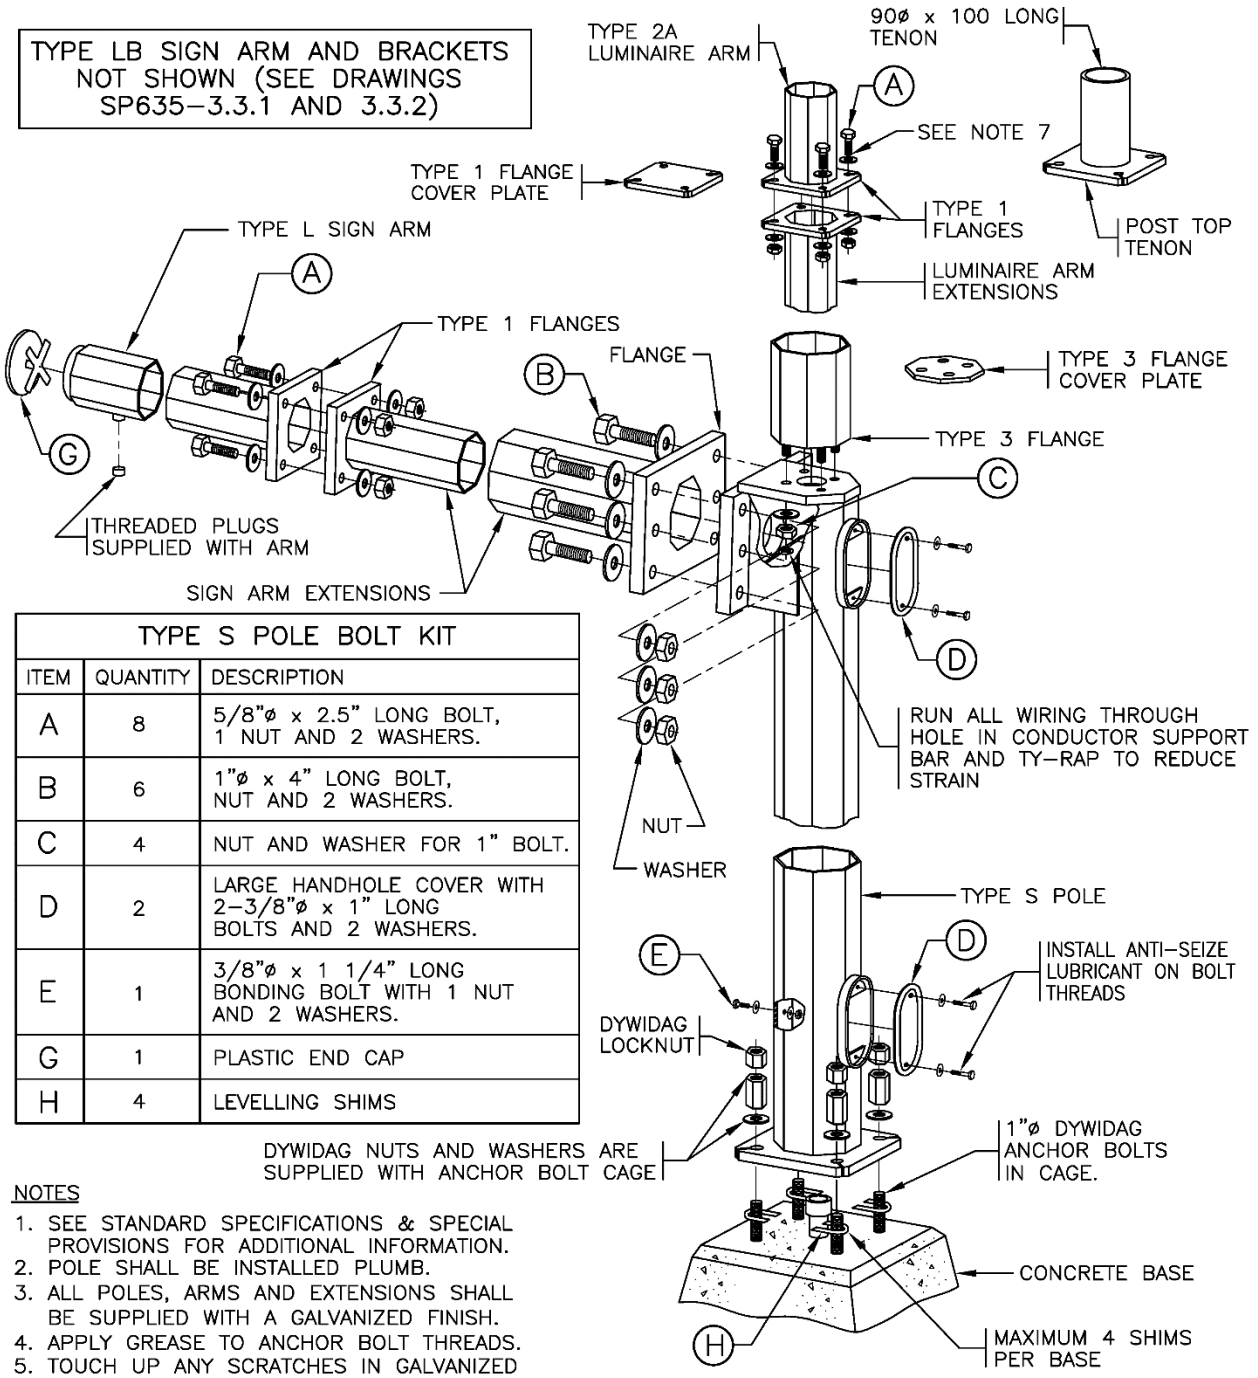

POLE ASSEMBLY DETAIL

NOT TO SCALE

TYPE S POLE BOLT KIT		
ITEM	QUANTITY	DESCRIPTION
A	8	5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS.
B	6	1"ø x 4" LONG BOLT, NUT AND 2 WASHERS.
C	4	NUT AND WASHER FOR 1" BOLT.
D	2	LARGE HANDHOLE COVER WITH 2–3/8"ø x 1" LONG BOLTS AND 2 WASHERS.
E	1	3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS.
G	1	PLASTIC END CAP
H	4	LEVELLING SHIMS

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
7. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN–OF–NUT" METHOD SPECIFIED IN CSA S6.


BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E		
D		
C	GENERAL REVISION AND NEW DRAWING NUMBER	APR 20
B	GENERAL REVISIONS	APR 17
A	TYPE 1 & ARM FLANGE BOLTS CHANGED TO A325	DEC 10

TYPE S SIGN POLE INSTALLATION DETAILS

Date: **14/11/03** Approved: **D.N. (Signature on File)** Chief Engineer

SPECIFICATION DRAWING No. SP635–3.1.12

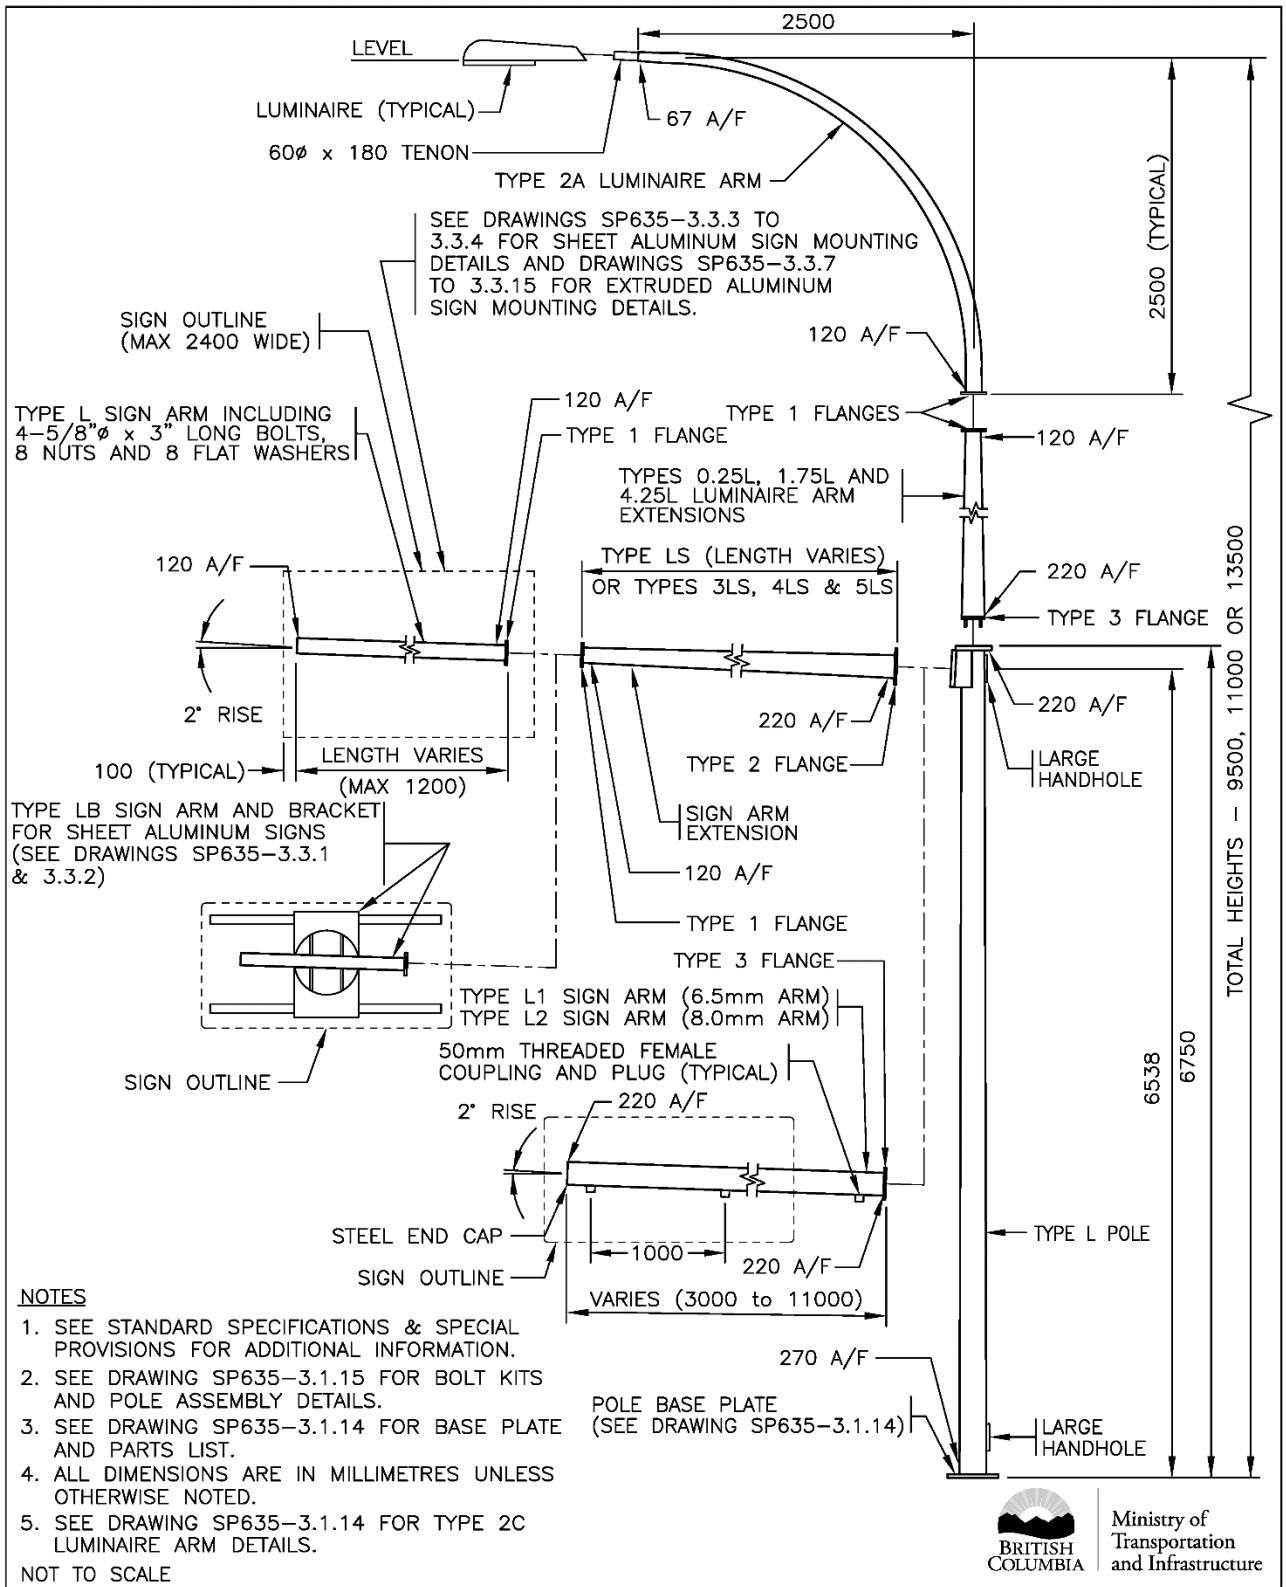

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635-3.1.15 FOR BOLT KITS AND POLE ASSEMBLY DETAILS.
3. SEE DRAWING SP635-3.1.14 FOR BASE PLATE AND PARTS LIST.
4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
5. SEE DRAWING SP635-3.1.14 FOR TYPE 2C LUMINAIRE ARM DETAILS.

NOT TO SCALE

Ministry of Transportation and Infrastructure

BRITISH COLUMBIA

No.	Revision	Date
G	PLYWOOD SIGN DETAILS REMOVED & NEW DRAWING NUMBER	APR 20
F	GENERAL REVISIONS	APR 17
E	SHEET ALUMINUM SIGN ADDED	APR 05
D	COUPLING DELETED ON SIGN ARM	NOV 01
C	L SIGN ARM & DWG. No. REV'D & 4LS EXT ADDED	AUG 96
B	L1/L2 SIGN ARMS & NOTE 5 ADDED	AUG 95

TYPE L SIGN POLE INSTALLATION DETAILS


Date Approved

30/09/93 E.L. (Signature on File)


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-3.1.13

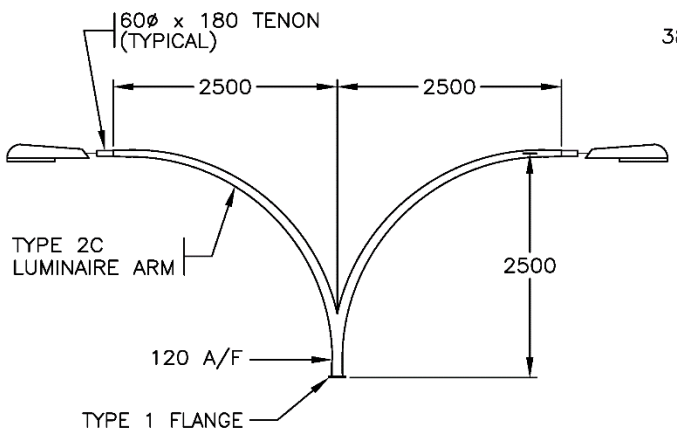

TYPE 2C LUMINAIRE ARM DETAILS

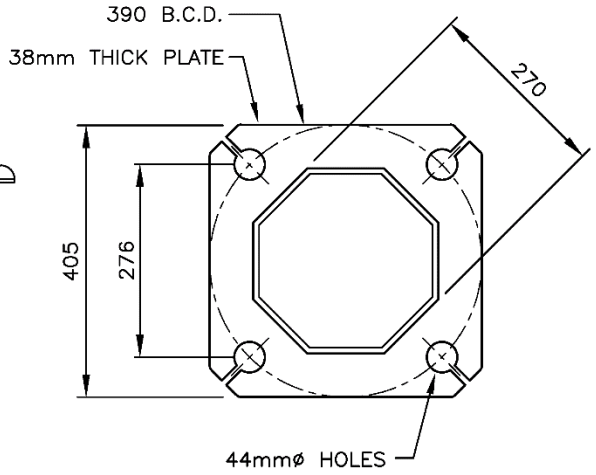

TYPE L POLE BASE PLATE

PARTS LIST FOR TYPE L SIGN POLE

PART	MASS (kg)
TYPE [L] POLE	442
TYPE L SIGN ARM [LSA] LENGTH VARIES	20 PER METRE
TYPE L SIGN ARM [1.2LSA] 1.2m LONG	24
TYPE L1 SIGN ARM [L1SA] LENGTH VARIES	39 PER METRE
TYPE L2 SIGN ARM [L2SA] LENGTH VARIES	46 PER METRE
TYPE [LB] SIGN ARM AND BRACKETS	100
TYPE [LS] SIGN ARM EXTENSION – LENGTH VARIES	45 PER METRE
TYPE [3LS] SIGN ARM EXTENSION – 3.0m	135
TYPE [4LS] SIGN ARM EXTENSION – 4.0m	180
TYPE [5LS] SIGN ARM EXTENSION – 5.0m	225
TYPE [4.25L] LUMINAIRE ARM EXTENSION – 4.25m	82
TYPE [1.75L] LUMINAIRE ARM EXTENSION – 1.75m	29
TYPE [0.25L] LUMINAIRE ARM EXTENSION – 0.25m	10
TYPE [2A] LUMINAIRE ARM	35
TYPE [2C] LUMINAIRE ARM	65
TYPE 1 FLANGE COVER PLATE [1FCP]	1.5
TYPE 2 FLANGE COVER PLATE [2FCP]	4
TYPE 3 FLANGE COVER PLATE [3FCP]	4
POST TOP TENON [PTT]	5

* [ ] I.D. LABEL ON POLE

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

No.	Revision	Date
F		
E	NEW DRAWING NUMBER	APR 20
D	GENERAL REVISIONS	APR 17
C	TYPE L SIGN ARM & DWG. No. REV'D & 4LS EXT ADDED	AUG 96
B	L1/L2 SIGN ARMS & 2C ARM ADDED	AUG 95
A	GENERAL REVISION	AUG 94

TYPE L SIGN POLE INSTALLATION DETAILS

Date Approved

30/09/93 E.L. (Signature on File)

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–3.1.14