
ACCESS · INDIGENOUS SKILLS 4 SUCCESS

Road geometry and acceptance

Volume 4 · F1, F2, F3, G1, G2, G3, G4, G5, G6

Classroom development edition · 30 October 2026

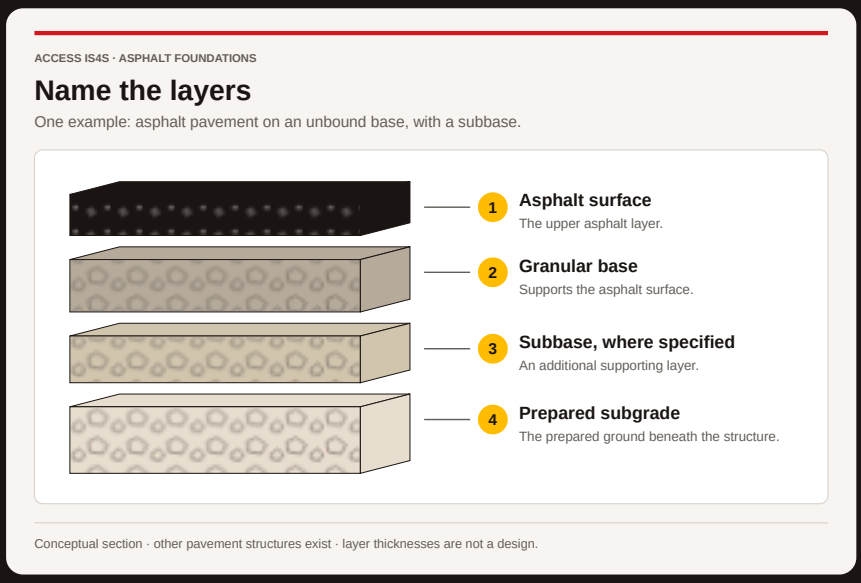

Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4). Original instructional adaptation by ACCESS IS4S (2026). Selected the unbound-base example, separated its layers and added functional descriptions. Other structures and design dimensions are not implied. Source locations: [{"figure": "1.6", "printed_page": 14, "pdf_page": 48}]. Original contributors: No separate contributor listed for this figure.

In this volume

1. How to use the volume and key terms
2. Drainage, grade and base
3. Verify slopes, crowns and grades
4. Final grade preparation
5. Gradation
6. Oil content
7. Application
8. Segregation
9. Density
10. Smoothness
11. Check the grade and the quantity

Use this volume

This volume provides complete classroom readings, worked examples, named practice tasks and answer guidance for road geometry and acceptance. Follow the learning route in each chapter, study the labelled figures and explain your reasoning. The separate answer book contains the worked keys and observation records.

Care for people, place and the next person using the work runs through the cases. Local First Nations, Métis and Inuit learners and partners bring distinct knowledge and priorities. Participation does not require sharing personal stories or cultural teachings, and no diagram claims to represent a Nation's protocol.

> Classroom authoring is complete for the listed competencies. Qualified technical review, actual fleet/site matching, a local teaching pilot and observed practical qualification are separate requirements. The practical records are ready for an instructor to configure and use; they do not certify unobserved work.

Read the picture, then test the idea

1. Identify the object, process or quantity shown.
2. Read labels, units and the figure's stated limits.
3. Connect the image to the chapter explanation.
4. Try the exercise and check against evidence.
5. Explain the result to another person and revise if needed.

Use AI as a checked working tool

Claude and ChatGPT can help explain provided documents and create supported files. Claude Code, Cowork and Codex can help with permitted multi-file tasks and repeatable workflows when their tools are available. Give a clear purpose, named sources, output formats, limits and checks. Ask for a findings table with page/cell evidence; verify it against the source. Reopen DOCX, XLSX, HTML or PDF outputs. For study audio/video, verify the script, captions, diagrams and actual playback. A generated result is not a technical approval.

Keep the term with its meaning

AGGREGATE
Mineral particles forming the solid skeleton of the mixture or granular layer.

BINDER
The asphalt material that coats and binds the aggregate in the specified mixture.

COMPACTED THICKNESS

Layer thickness after the required compaction process; distinct from loose depth behind the screed.

DENSITY REFERENCE
The specified comparison value used as the denominator of a percent-density calculation.

GRADATION
Distribution of aggregate particle sizes, commonly expressed as cumulative percent passing specified sieves.

HEAD OF MATERIAL
The quantity/distribution of mix immediately in front of the screed.

JOB MIX FORMULA (JMF)
The accepted mixture proportions and properties under the applicable quality/contract process.

LOCKOUT
Isolation, securing and verification of hazardous energy for work requiring protection.

LOT / SUB-LOT
Defined portions of work used for sampling, testing and acceptance under the contract.

OMM
Operation and maintenance manual matched to the actual machine, serial range and configuration.

RAP
Reclaimed asphalt pavement: recovered material containing aggregate and aged binder.

SDS
Safety data sheet for the actual product; read with its label and workplace procedure.

SCREED
The paver assembly that forms the mat; its response depends on setup, material and movement.

STATION / OFFSET
Location along an alignment / distance and direction from a defined reference.

TCP
Traffic control person with the required training and assigned role.

TRACEABILITY
A record connecting material, location, time, sample, result and authorized decision.

SVG
Scalable vector graphics: useful for clear diagrams whose labels and geometry must be checked.

DOCX / XLSX
Editable document / spreadsheet workbook; verify actual content and formulas after creation.

PDF / HTML
Page-based reading copy / browser document; inspect completeness, access and linked resources.

MP3 / MP4 / VTT

Audio file / video container / timed web captions; test playback and retain a transcript.

Study chapter · Outline F1

Drainage, grade and base

A pavement is a layered structure that must carry loads and manage water. A smooth new surface will not correct an unstable foundation or a blocked drainage route. Reading the whole road helps the crew protect access to homes, services and community spaces.

- Proper road drainage
- Sub grade
- Sub-base
- Base

LEARNING STEP 1

Proper road drainage


Surface water follows crossfall, longitudinal grade and low points toward an approved collection route. Subsurface water needs its own drainage path. Inspect ditches, catch basins, culverts and outlets against the drawings; a visible inlet is not proof of a functioning outlet. Sediment, fuel and uncured materials must be kept out of drainage systems. Do not redirect water toward neighbouring land or a watercourse because that route looks convenient. Report ponding, erosion and blocked drainage before covering the evidence. Approved environmental controls and local access commitments belong in the work plan.

Name the layers

ACCESS IS4S · ASPHALT FOUNDATIONS

Name the layers

One example: asphalt pavement on an unbound base, with a subbase.

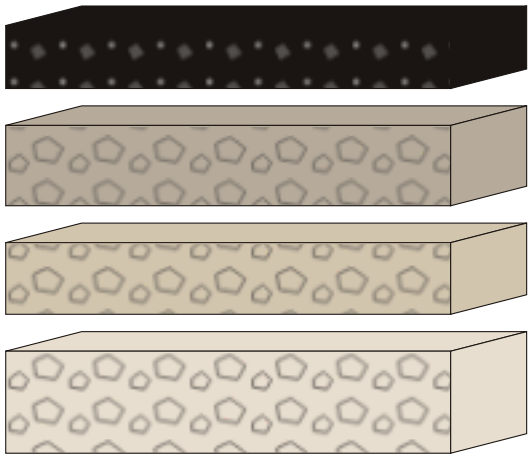

1. **Asphalt surface**
   The upper asphalt layer.
2. **Granular base**
   Supports the asphalt surface.
3. **Subbase, where specified**
   An additional supporting layer.
4. **Prepared subgrade**
   The prepared ground beneath the structure.

Conceptual section · other pavement structures exist · layer thicknesses are not a design.

Note. Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4). Original instructional adaptation by ACCESS IS4S (2026). Selected the unbound-base example, separated its layers and added functional descriptions. Other structures and design dimensions are not implied. Source locations: [{"figure": "1.6", "printed_page": 14, "pdf_page": 48}]. Original contributors: No separate contributor listed for this figure. Full source context.

LEARNING STEP 2

Sub grade

Subgrade is the prepared soil foundation beneath the pavement structure. Soil type, moisture, density, frost susceptibility and soft areas influence performance. Rutting under equipment, pumping water and inconsistent support require evaluation; adding asphalt is not a substitute for correcting the cause. Geotextiles can separate materials or provide filtration, depending on the specified product and design. Geogrids have different functions. Check product identity, overlap, orientation and protection requirements before placement. Damaged or wrongly installed fabric cannot be assumed effective because it is hidden.

LEARNING STEP 3

Sub-base

Sub-base distributes loading and can provide a working platform or drainage function. Its specified grading, thickness, moisture and compaction requirements govern placement. Approved recycled material may be suitable, but availability alone does not establish compliance. Place in controlled lifts, protect against


contamination and check each accepted layer before burying it. Segregation, excessive fines and trapped water can change how the layer behaves. Record the material source and test results so a later concern can be traced to an actual location and lift.

LEARNING STEP 4

Base

Base is the prepared layer directly supporting the asphalt in a typical flexible pavement. Crushed aggregate from a quarry or pit, approved dredged or river-derived material, and recycled products each require the project's source authorization and material acceptance. Their names do not establish equal performance or permission to extract them. Check surface elevation, crossfall, density, cleanliness and drainage. A thin low spot in the base changes asphalt demand and may create a local thickness problem. Maintain the accepted base until paving starts; traffic or rain can alter it after inspection.

Reuse materials through a verified process

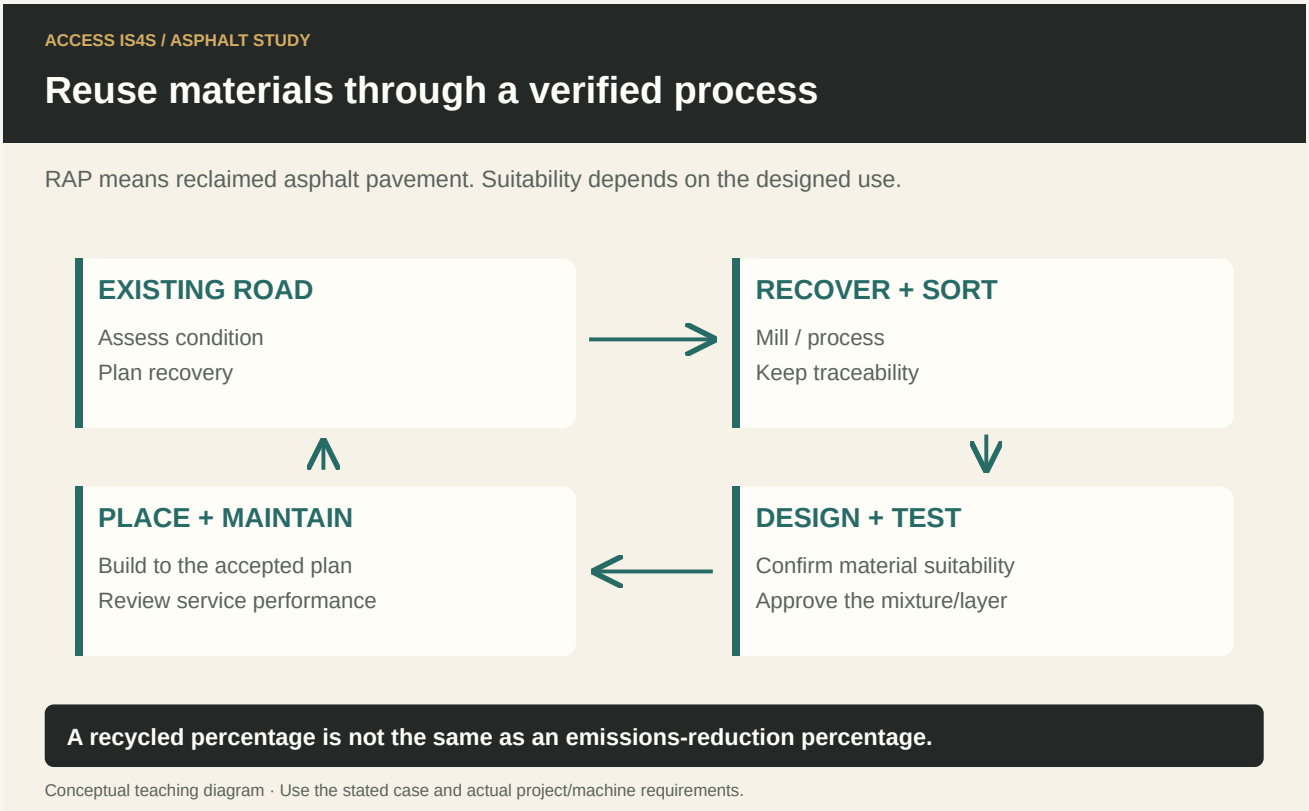

Note. ACCESS IS4S. (2026). Reuse materials through a verified process [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

Worked example · Follow the water

A 120 m access road has a sound-looking base. A blocked catch basin sits at its low point, and water is pumping through one wheel path. The paving crew is ready.

Think it through.

Hold the affected work and identify the drainage and support problems. Protect public access and the inlet, document the location, and request the responsible person's correction and acceptance. Do not treat extra asphalt as a drainage repair. Record the repaired outlet and accepted foundation before release.

Try it and explain your thinking

Draw the four typical layers from prepared soil to asphalt

Draw the four typical layers from prepared soil to asphalt. Label one check at each interface.

Skills you use: Reading, Writing, Creativity and innovation.

An approved 80 m × 4 m sub-base lift is 0.15 m compacted thickness

An approved 80 m × 4 m sub-base lift is 0.15 m compacted thickness. Find its compacted volume. Can you order that many loose cubic metres without further information?

Skills you use: Numeracy, Problem solving.

A partner proposes opening a ditch toward a nearby creek to remove ponded water

A partner proposes opening a ditch toward a nearby creek to remove ponded water. Give a respectful response and a next step.

Skills you use: Communication, Collaboration, Adaptability.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Identify actual layer boundaries on an approved section.	0 / 1 / 2	Evidence/help: _____
Trace a drainage route from surface to authorized outlet.	0 / 1 / 2	Evidence/help: _____
Record and communicate a foundation defect before covering it.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, F1, printed p. 48; source PDF pp. 50–50.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 5: Soils and Drainage for Asphalt Pavements; source PDF pp. 281–314. Open publication.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 6: Thickness Design; source PDF pp. 315–340. Open publication.
- BC Ministry of Transportation and Transit. (2025). 2025 Standard Specifications for Highway Construction, Volume 1. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline F2

Verify slopes, crowns and grades

Grade work turns a drawing into reliable elevations on the ground. Keep the benchmark, units, drawing revision and sign convention visible in every calculation. Another person should be able to repeat your result without guessing what a number means.


- Confirm plans/blueprints
- Define role of Surveyor
- Define role of Grade Person
- Typical calculations

LEARNING STEP 1

Confirm plans/blueprints

Read the title block, north arrow, legend, scale, revision and detail references before measuring. A plan is the overhead view; a profile follows an alignment; a cross-section cuts across it. Profiles often exaggerate the vertical scale, so the drawn angle is not the road’s actual slope. Use stated dimensions before scaling, especially on resized screens or prints. One inch is exactly 25.4 mm and one foot exactly 0.3048 m. Horizontal run is used for ordinary grade calculations; a tape stretched along a slope measures a longer distance.

Keep the benchmark in the calculation

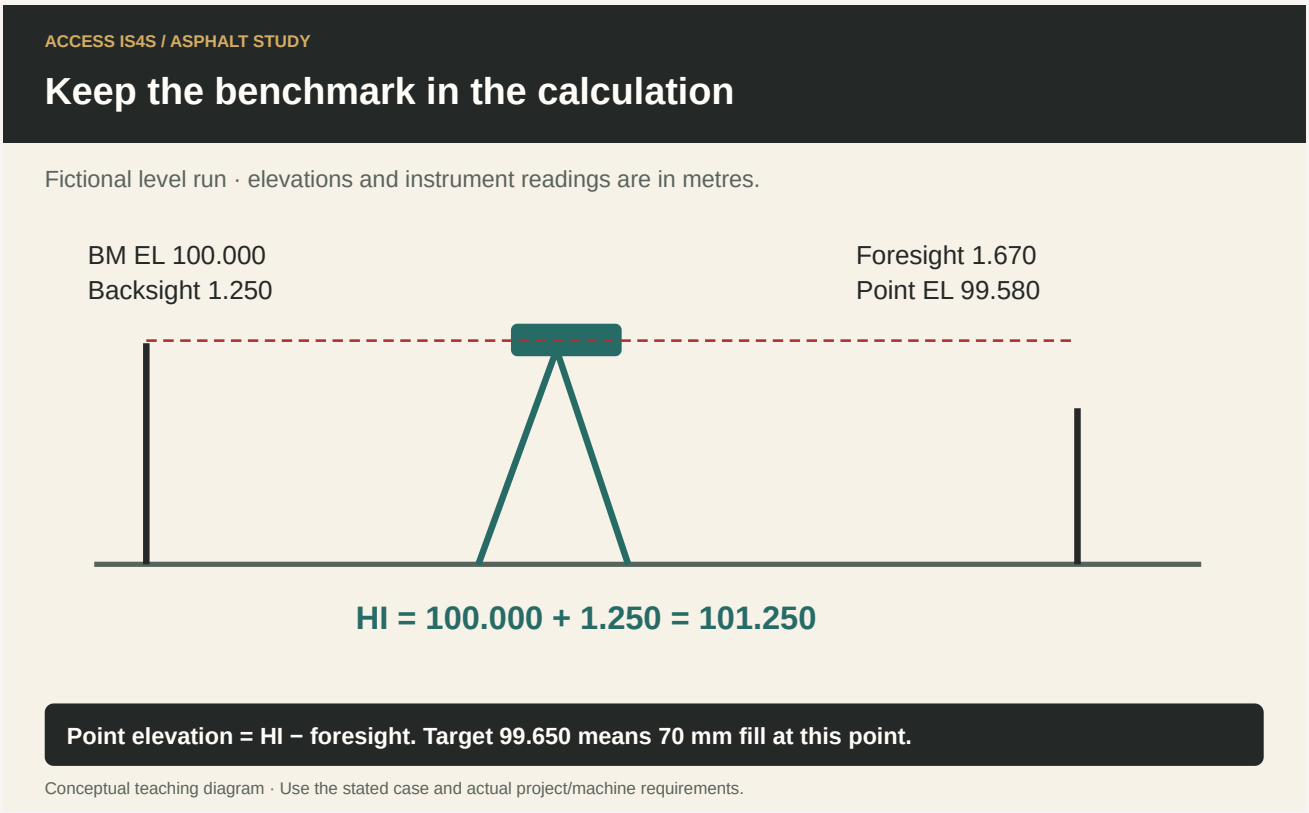

Note. ACCESS IS4S. (2026). Keep the benchmark in the calculation [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Define role of Surveyor

The surveyor establishes or verifies control and supplies elevations, alignment and construction information within their assigned role. Cut and fill at a profile station normally refer to the defined centreline, not automatically to the entire cross-section. Pipe invert is the inside-bottom elevation. Depth to invert and cover above the pipe crown are different quantities; calculating cover requires the appropriate pipe dimensions. Quantity work combines accepted geometry with a justified allowance for settlement or compaction. A material list includes identity, size, quantity, units and drawing reference, not just an unexplained total.

LEARNING STEP 3


Define role of Grade Person

The grade person transfers authorized control to usable offset stakes, marks and machine references. Protect the original control and record offsets so a stake displaced from the construction line is not mistaken for the line itself. Confirm benchmark identity, datum, instrument setup and backsight. If marks conflict or a stake moves, stop using it and obtain verification. Do not average conflicting elevations. Read back instructions with station, side, offset, target elevation and cut/fill direction.

Typical calculations

For differential levelling, height of instrument (HI) = known elevation + backsight; point elevation = HI − foresight. For grade, rise/run × 100 gives percent when both use the same units. A 2% crossfall across a 3.5 m horizontal half-width gives 0.070 m or 70 mm drop. Use a spirit level, builder's level, laser and automatic slope control only with their setup, checking and operating instructions. Check calibration and an independent reference. Instrument displays do not make an incorrect benchmark correct. Record tolerances from the project rather than inventing a universal pass band.

Three views. Three different questions.

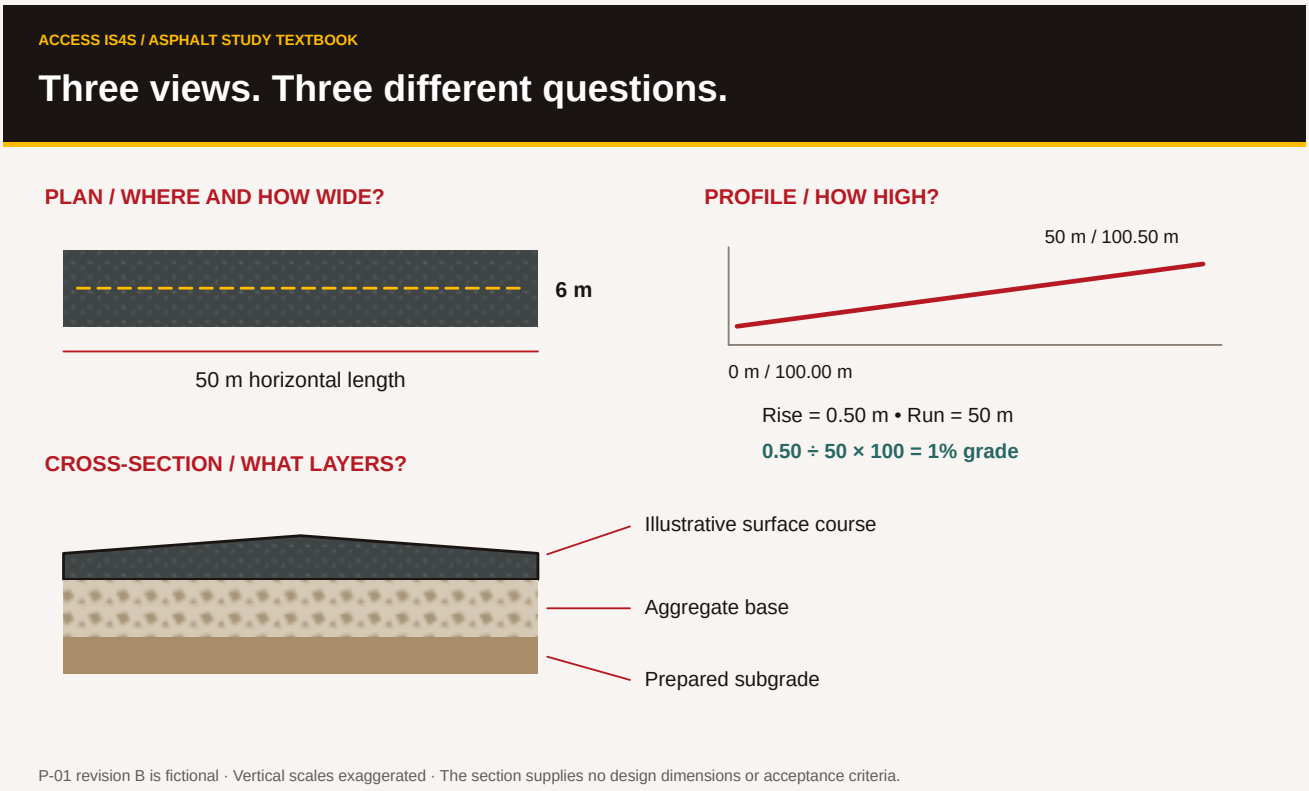

Note. ACCESS IS4S. (2026). Three views. Three different questions. [Original instructional SVG]. Conceptual illustration; read the stated conditions in the lesson.

Worked example · A level-book entry

Benchmark EL 100.000 m; backsight 1.250 m; foresight to prepared base 1.670 m. Target base EL 99.650 m.

Think it through.

HI = 101.250 m. Existing base = 101.250 − 1.670 = 99.580 m. Target minus existing = +0.070 m: fill 70 mm at this point, subject to the specified material and compaction method. Check against the correct drawing revision and benchmark before directing work.

Try it and explain your thinking

Use the same benchmark with backsight 1.400 m and foresight 1.600 m

Use the same benchmark with backsight 1.400 m and foresight 1.600 m. Target EL is 99.650 m. State cut or fill.

Skills you use: Numeracy, Reading.

A profile uses horizontal 1:500 and vertical 1:50

A profile uses horizontal 1:500 and vertical 1:50. Explain why measuring its apparent angle is unreliable.

Skills you use: Digital, Problem solving.

Write a handover for a disturbed offset stake at station 0+080, right side.

Write a handover for a disturbed offset stake at station 0+080, right side.

Skills you use: Writing, Communication, Collaboration.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Set up and check spirit, builder's and laser levels under supervision.	0 / 1 / 2	Evidence/help: _____
Verify automatic slope control against an independent approved reference.	0 / 1 / 2	Evidence/help: _____
Maintain specified grade and slope and retain a legible level-book record.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, F2, printed p. 49; source PDF pp. 51–52.
- Leica Geosystems. (n.d.; manufacturer brochure). Leica NA700 Series Automatic Levels. Open publication.
- Leica Geosystems. (n.d.). Leica NA700 Series Automatic Levels: Technical Data. Open publication.
- Seymour Midwest. (n.d.). MP Metal Professional Measuring Wheels: Counter Alignment. Open publication.
- BC Ministry of Transportation and Transit. (2025). 2025 Standard Specifications for Highway Construction, Volume 1. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline F3

Final grade preparation

Final grade preparation is the last opportunity to correct the support and geometry before the mat covers them. Work from accepted levels, drainage and utility details. A neat edge and a clean base help the paving crew place the intended thickness.


- Check and raise utilities
- Fine grading
- Boning crown/cross-fall
- Limit of asphalt layout

LEARNING STEP 1

Check and raise utilities

Locate utility structures using the project information and required locating process. Confirm casting type, ownership, target elevation and approved adjustment detail. Raising a frame may require rings, approved bedding, structural support and curing time; it is not simply lifting the lid. Protect openings, coordinate access and traffic control, and prevent loose material entering the system. Only authorized workers make the adjustment. Recheck finished elevation and crossfall around the structure so the paving joint does not create a pond or abrupt bump.

Read the mark, the offset and the datum

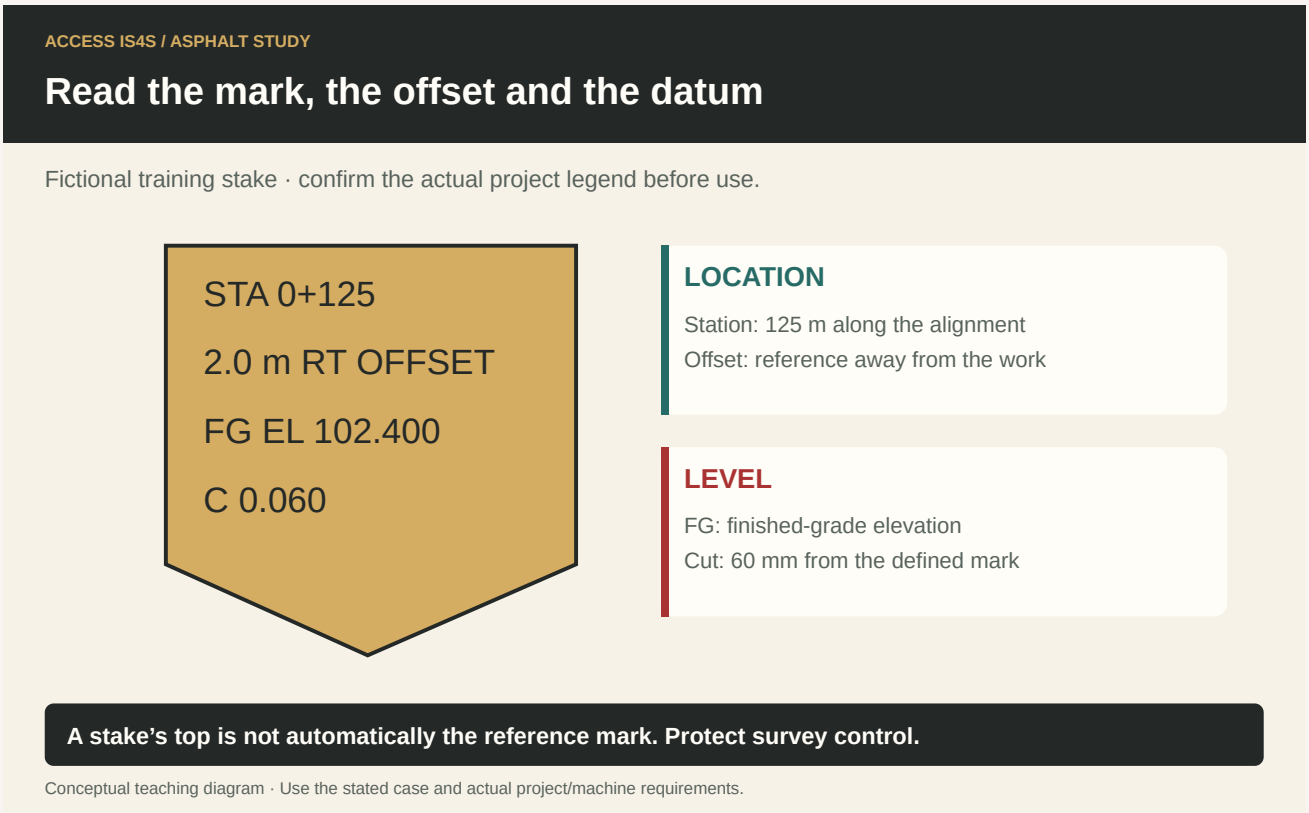

Note. ACCESS IS4S. (2026). Read the mark, the offset and the datum [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Fine grading

Fine grading removes high spots and fills low areas with the approved material and method. Check moisture and compaction as required, remove contamination and protect the surface from rutting. Do not conceal soft spots with a thin scatter of dry aggregate. Confirm that repairs are accepted and that the base is ready for the specified prime or tack treatment, where applicable. Record the inspection location and time because construction traffic and weather may change the surface after it was checked.

LEARNING STEP 3

Boning crown/cross-fall

Boning uses aligned sighting references to compare intermediate levels with a defined grade. All rods and reference heights must be consistent, and the method needs a verified starting and finishing reference. Check crown and crossfall with appropriate instruments and the drawing's actual geometry. A crown is not always centred, and curves, transitions, intersections and accessibility features may have different requirements. Check machine slope calibration against an independent measure. Agreement between two displays using the same wrong reference is not independent verification.

LEARNING STEP 4

Limit of asphalt layout


Mark the finished mat limits from approved alignment, width, edge and tie-in details. Include tapers, entrances, curb offsets, construction joints and the paving sequence. Distinguish the paver’s nominal screed width from the specified finished width and any working allowance. Measure at identified stations and record changes. Discuss public access and emergency routes before changing the work boundary. If the layout conflicts with a utility or existing surface, request a resolved detail before placing material.

Name the layers

ACCESS IS4S · ASPHALT FOUNDATIONS

Name the layers

One example: asphalt pavement on an unbound base, with a subbase.

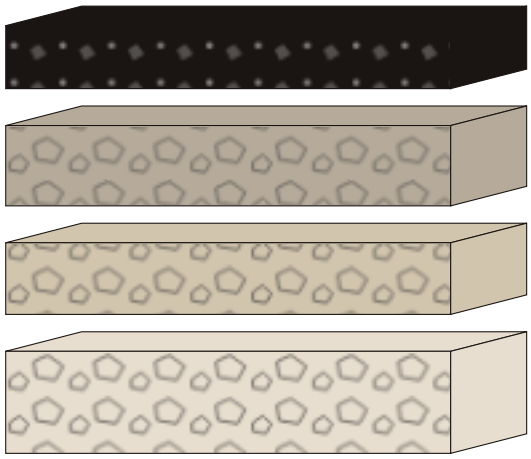

1. **Asphalt surface** — The upper asphalt layer.
2. **Granular base** — Supports the asphalt surface.
3. **Subbase, where specified** — An additional supporting layer.
4. **Prepared subgrade** — The prepared ground beneath the structure.

Conceptual section · other pavement structures exist · layer thicknesses are not a design.

Note. Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4). Original instructional adaptation by ACCESS IS4S (2026). Selected the unbound-base example, separated its layers and added functional descriptions. Other structures and design dimensions are not implied. Source locations: [{"figure": "1.6", "printed_page": 14, "pdf_page": 48}]. Original contributors: No separate contributor listed for this figure. Full source context.

Worked example · Width before tonnage

A rectangular paving area is 60 m long. The approved width is 4.2 m, but the marked limits measure 4.0 m.

Think it through.

Approved area = 252 m²; marked area = 240 m². The shortfall is 12 m². Verify the drawing and correct the layout before ordering or placing to the wrong boundary. Extra mix later does not automatically restore the intended edge support and joint quality.

Try it and explain your thinking

The target casting EL is 102.340 m and its verified current EL is 102.295 m

The target casting EL is 102.340 m and its verified current EL is 102.295 m. Find the required elevation change.

Skills you use: Numeracy, Problem solving.

Build a five-item release record for the base.

Build a five-item release record for the base.

Skills you use: Writing, Digital.

A worker suggests smoothing a pumping area and paving immediately to keep the delivery slot

A worker suggests smoothing a pumping area and paving immediately to keep the delivery slot. Respond.

Skills you use: Communication, Adaptability, Collaboration.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Check utility elevations and protected openings with the responsible person.	0 / 1 / 2	Evidence/help: _____
Verify crown, crossfall and width against the current layout.	0 / 1 / 2	Evidence/help: _____
Complete a release record identifying unresolved defects.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, F3, printed p. 51; source PDF pp. 53–53.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 8: Hot Mix Asphalt Paving; source PDF pp. 391–446. Open publication.
- BC 1 Call. (August 2020). Safety Is a Shared Responsibility: Six Steps to Safe Digging. Open publication.
- BC Ministry of Transportation and Transit. (2025). 2025 Standard Specifications for Highway Construction, Volume 1. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline G1

Gradation

Quality control connects the planned pavement with evidence from production and placement. The crew needs to know which document governs, which tests apply and who can release or reject work. This chapter uses the supplied BC Ministry of Transportation DB 2006 Section 502 for a dated contract-reading exercise.


- MOT Specs
- The audit process
- Penalty/bonus
- Limit of asphalt layout

LEARNING STEP 1

MOT Specs

A quality management plan identifies materials, accepted mix design, sampling and testing, production controls, placement checks, records and responsibilities. Quality control is the producer/contractor’s process control; quality assurance provides the owner’s confidence and verification through the specified system. Neither term means that a crew can self-approve a departure. In the 2006 example, a mix design becomes the job mix formula (JMF) through the required written acceptance process. Identify the actual contract edition, special provisions and amendments before using any limit on a real job.

A quality result needs a traceable chain

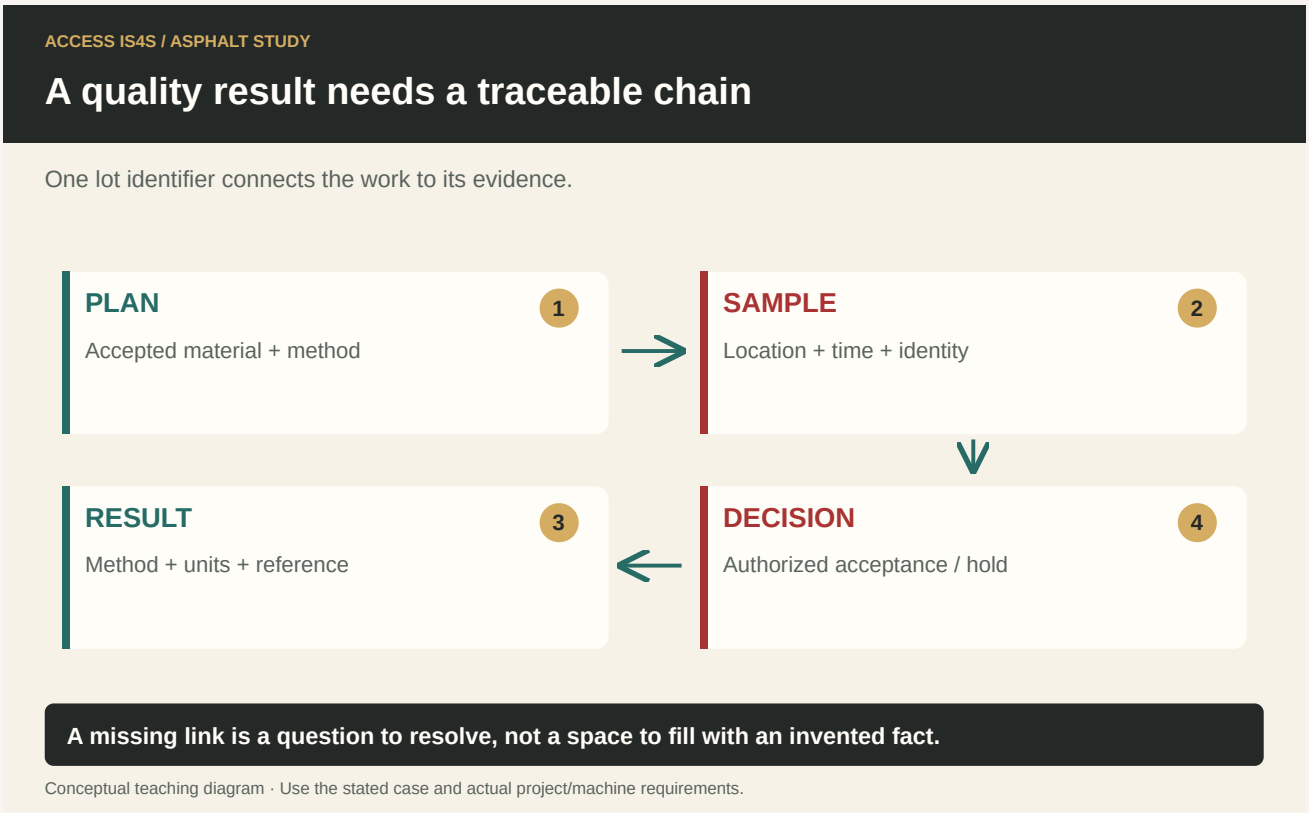

Note. ACCESS IS4S. (2026). A quality result needs a traceable chain [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

The audit process

An audit follows evidence: approved procedure, actual activity, dated record, result and corrective action. A missing record and a failed result are different findings, and both require a response. Trace a sample from station and lot through laboratory report to disposition. Check instrument identification and calibration records. Record what was observed without inventing motives. Close a finding only when the responsible authority accepts the evidence of correction. A tidy binder with untraceable sample numbers does not demonstrate control.

LEARNING STEP 3


Penalty/bonus

Payment adjustments are contract calculations tied to defined lots, tests and acceptance rules. A bonus for one property does not cancel rejection under another. The 2006 tables separately address binder content, gradation, application rate, segregation, density and smoothness. Always state parameter, units, applicable lift, table and edition. Crowns and crossfalls remain geometric requirements even where a payment table does not express them. Learners calculate an isolated adjustment first, then check all other acceptance conditions before discussing overall payment.

Limit of asphalt layout

Define the paving limits, lift, station range, lane and measured area before assigning tickets or samples to a lot. Mark intersections, letdowns and other geometry according to the contract's measurement method. A layout change can affect quantity, sample locations and the meaning of a payment calculation. For the 2006 gradation exercise, Table 502-G compares departures from the JMF on specified sieves; it is not a width table. Keep layout verification and the appropriate quality-table lookup linked through the same lot identifier.

Find the document that governs the task

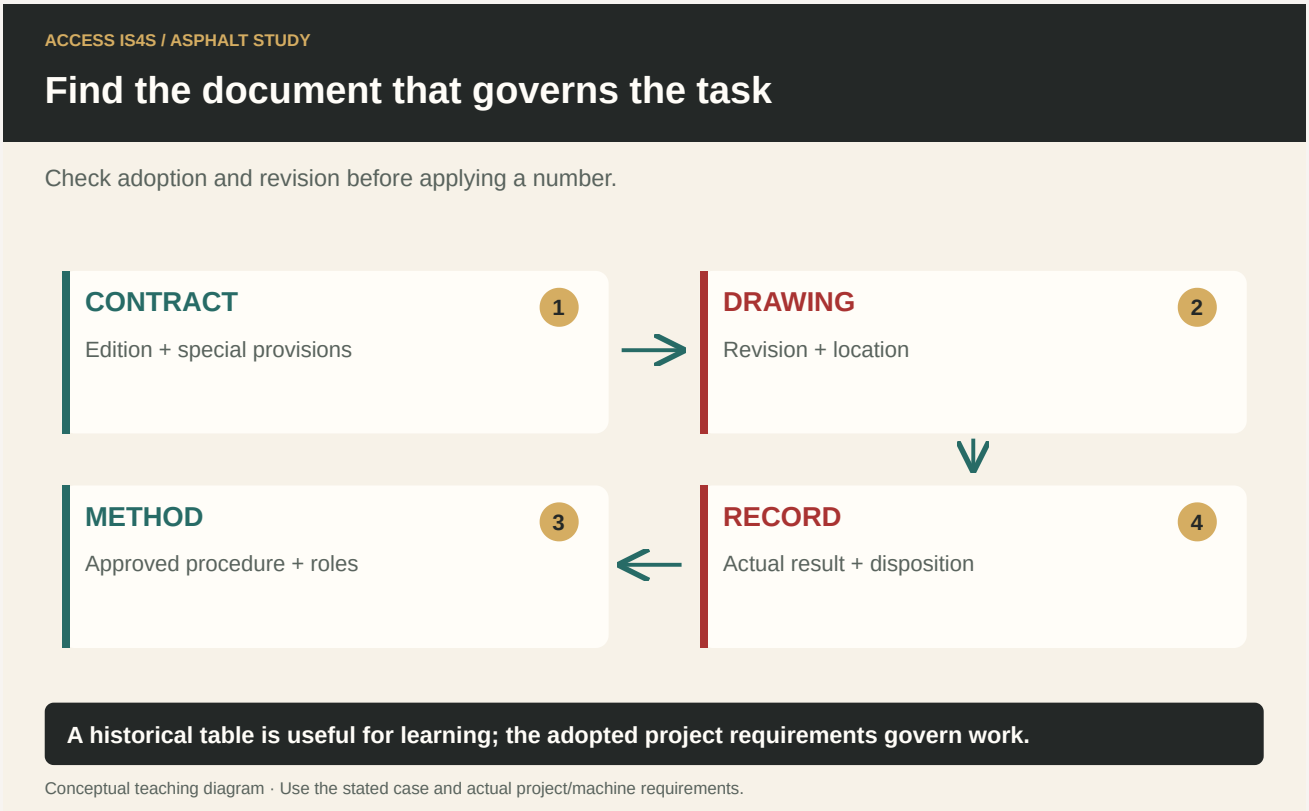

Note. ACCESS IS4S. (2026). Find the document that governs the task [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

Worked example · One good result is not full acceptance

A fictional 600 t lot qualifies for a +$0.75/t gradation adjustment under the complete applicable table conditions. A separate density result is under review.

Think it through.

The isolated gradation adjustment is 600 × $0.75 = +$450. Record it as provisional for this parameter. Do not declare the lot accepted or payable until all applicable requirements and the authorized disposition are resolved.

Try it and explain your thinking

An audit finds sample Q17 on a report but no matching location log

An audit finds sample Q17 on a report but no matching location log. Write a finding and action.

Skills you use: Writing, Problem solving.

For a fictional 420 t lot, calculate a −$1.50/t isolated adjustment.

For a fictional 420 t lot, calculate a −$1.50/t isolated adjustment.

Skills you use: Numeracy, Reading.

Compare the 2006 document and the current project document in a digital register

Compare the 2006 document and the current project document in a digital register. What fields prevent accidental substitution?

Skills you use: Digital, Collaboration, Adaptability.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Trace one fictional lot through plan, sample, result and disposition.	0 / 1 / 2	Evidence/help: _____
Identify the governing edition and amendments.	0 / 1 / 2	Evidence/help: _____
Communicate a quality hold with exact location and evidence.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, G1, printed p. 52; source PDF pp. 54–54.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 3: Mineral Aggregates and Mixture Additives; source PDF pp. 143–192. Open publication.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 10: Quality Control and Acceptance of Hot Mix Asphalt; source PDF pp. 479–552. Open publication.
- British Columbia Ministry of Transportation. (2006). Design build standard specifications, Section 502; PDF pp. 297–318. Historical contract exercise. Open publication.
- BC Ministry of Transportation and Transit. (2025). 2025 Standard Specifications for Highway Construction, Volume 1. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.