## Try it and explain your thinking

### A machine meter reads 812 h; the last service was at 786 h and the fictional interval is 25 h

A machine meter reads 812 h; the last service was at 786 h and the fictional interval is 25 h. Is it due?

**Skills you use:** Numeracy, Reading.

### Write a useful entry for water found in a separator.

Write a useful entry for water found in a separator.

**Skills you use:** Writing, Digital, Problem solving.

### A partner wants to check a leak with a bare hand

A partner wants to check a leak with a bare hand. Respond and arrange the next step.

**Skills you use:** Communication, Collaboration.

## Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

The outline specifies a minimum 80% checklist result for this task. Score the 3 task criteria out of 6; require at least 5 points and all critical items passed. This local scoring rubric operationalizes the checklist; it is not a separate certification. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Safe access, surroundings and communication maintained. | Pass / hold | Observation: _____ |
| **Critical:** Required energy, heat, movement and public-access controls maintained for the actual task. | Pass / hold | Observation: _____ |

| What the observer checks | Result | Evidence |
|---|---|---|
| Match lubricant/fluids and service intervals to the machine. | 0 / 1 / 2 | Evidence/help: _____ |
| Service intake, separator and accessible points under the correct isolation. | 0 / 1 / 2 | Evidence/help: _____ |
| Inspect cooling/battery areas, restore guards and complete the defect record. | 0 / 1 / 2 | Evidence/help: _____ |

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

## Sources and further reading


- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, H4, printed p. 61; source PDF pp. 63–64.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 10: De-energization and Lockout. Open publication.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.
- Lincoln Industrial. (December 2013; Form 404636). Lever Gun Models 1142, 1147 and 1151: Installation and Maintenance Guide. Open publication.


Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline H5

# Markers, grades and stakes

A stake is a compact instruction that depends on its location, legend and reference. Read the whole mark before acting. Protect survey control so the next crew inherits reliable information.


Abbreviations used on stakes


Interpret stakes


LEARNING STEP 1

## Abbreviations used on stakes

Common abbreviations include BM or B/M—benchmark; C—cut; CB or C/B—catch basin; SMH—sanitary manhole; EL/Elv—elevation; FG—finished grade; PL—property line; RW—right of way; SAN or S—sanitary; Mon—monument; G—gas; PVC—polyvinyl chloride. Project legends can differ, so confirm the meaning and units. A gas mark identifies a potential utility concern; it does not give complete location, depth or clearance information. An elevation is a height relative to a stated datum, not a depth below the current surface.

**Read the mark, the offset and the datum**

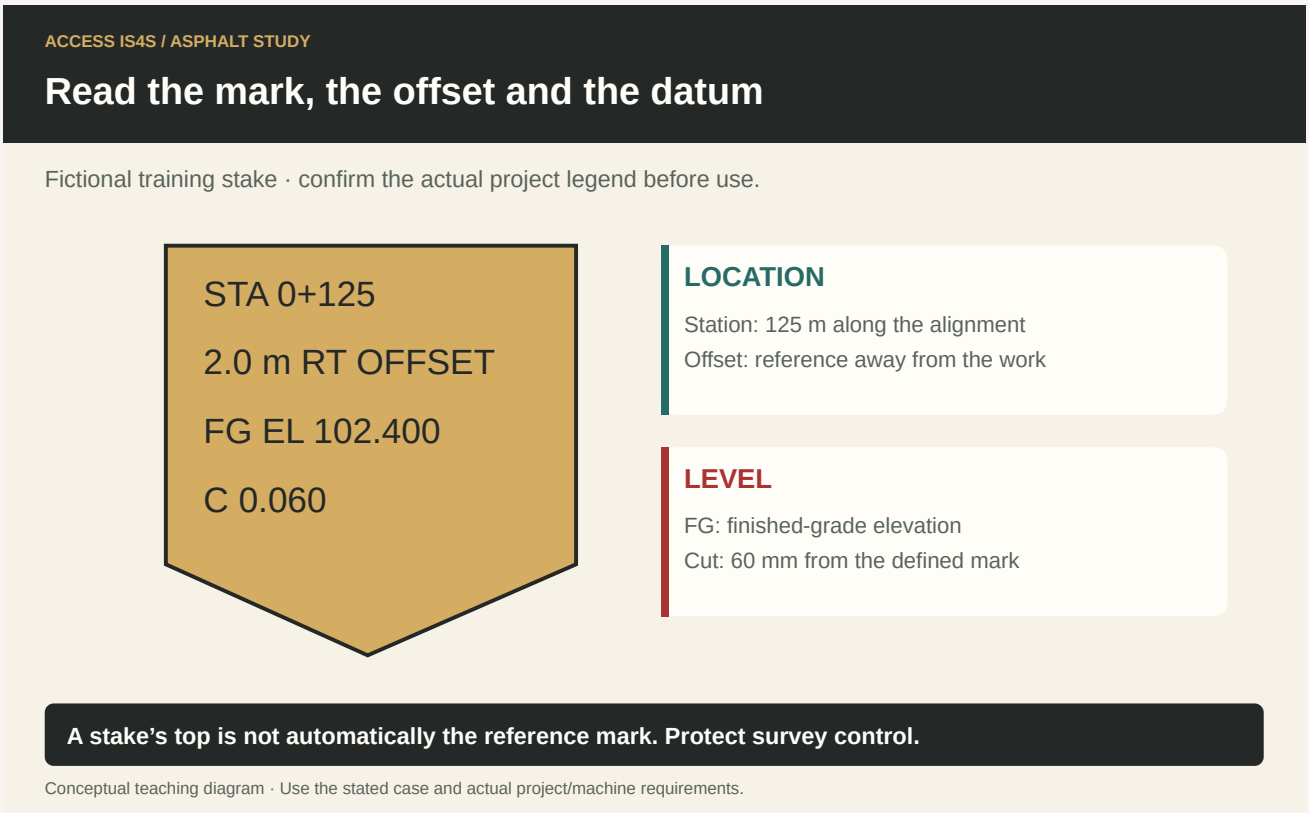


**Note.** ACCESS IS4S. (2026). Read the mark, the offset and the datum [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.


LEARNING STEP 2

## Interpret stakes

Read station, side, offset, target/reference mark, cut/fill, grade and slope together. Station 0+125 means 125 m along the defined alignment in this metric example. An offset stake sits away from the point it describes; preserve both the offset and direction. Property pins and survey monuments are protected control, not disposable construction stakes. A temporary benchmark may use an assumed datum, while other control is tied to a geodetic datum; do not combine them without an authorized relationship.

Cross-heads and reference marks can carry a level used to transfer information. Confirm which physical mark is the reference before measuring. Locate work such as catch basins, manholes and headwalls from the approved layout. Compare the milling limit and required profile with the marks before setting controls. If a stake is disturbed, illegible or conflicts with the plan, protect the evidence and request verification. An apparently small guess can propagate along an entire pass.

## Keep the benchmark in the calculation

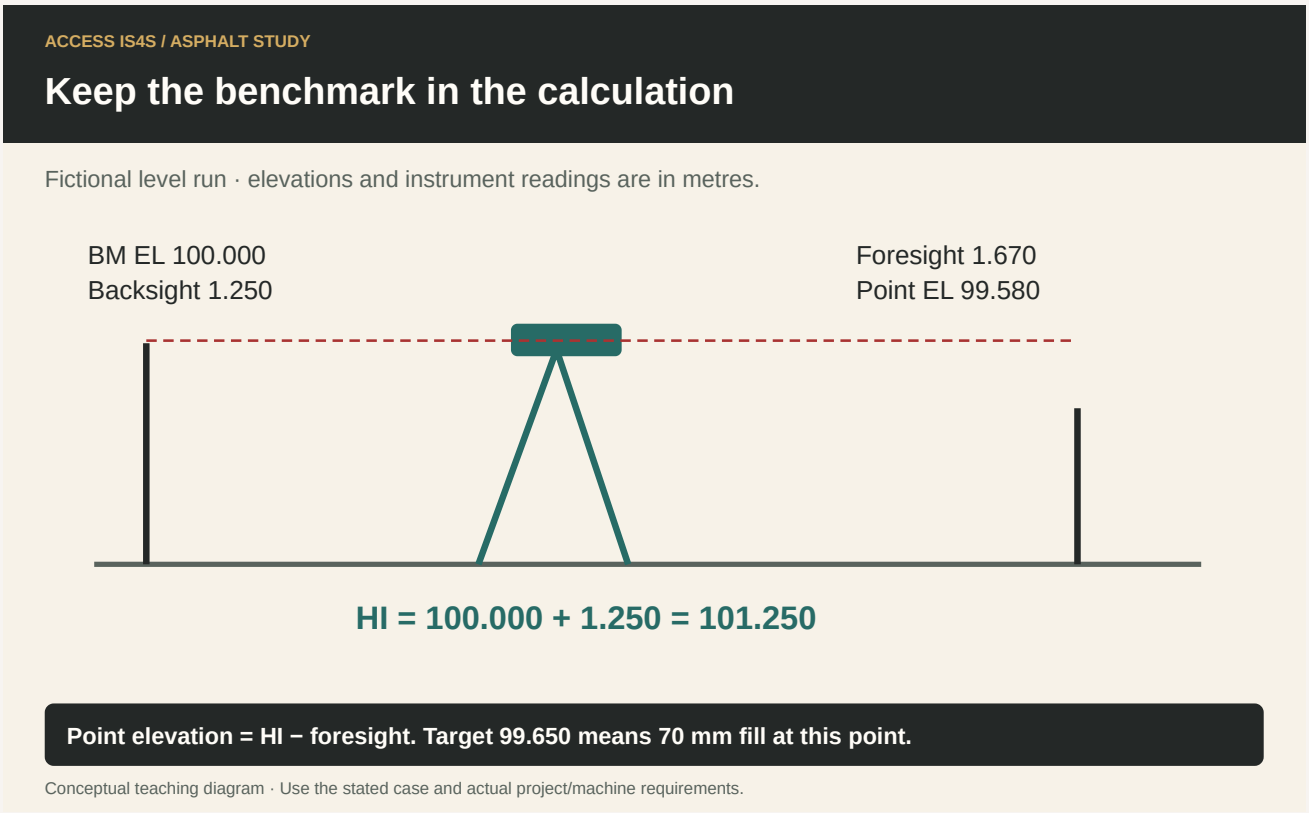


**Note.** ACCESS IS4S. (2026). Keep the benchmark in the calculation [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

## Worked example · Read an offset

A fictional stake says STA 0+125, 2.0 m RT OFFSET, FG EL 102.400, C 0.060. The legend defines cut from the marked reference to the required grade.

**Think it through.**

Locate station 125 m on the alignment and interpret the right-side offset using the project convention. The stated cut is 60 mm from the defined reference, not automatically from the top of the stake. FG is 102.400 m in the stated datum. Confirm the target location and mark before using the value.

## Try it and explain your thinking

### Expand BM, CB, EL, FG, PL and PVC.

Expand BM, CB, EL, FG, PL and PVC.

**Skills you use:** Reading, Writing.

### At a verified point, existing EL is 102.455 m and required milled EL is 102.400 m

At a verified point, existing EL is 102.455 m and required milled EL is 102.400 m. Find nominal cut depth.

**Skills you use:** Numeracy, Problem solving.

### A digital plan uses a geodetic datum; a loose note says “BM 100 assumed.” What should the crew do

A digital plan uses a geodetic datum; a loose note says “BM 100 assumed.” What should the crew do?

**Skills you use:** Digital, Communication, Collaboration.

## Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Safe access, surroundings and communication maintained. | Pass / hold | Observation: _____ |

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Required energy, heat, movement and public-access controls maintained for the actual task. | Pass / hold | Observation: _____ |
| Interpret station, offset, cut/fill and elevation on a training layout. | 0 / 1 / 2 | Evidence/help: _____ |
| Identify and protect benchmarks and monuments. | 0 / 1 / 2 | Evidence/help: _____ |
| Maintain the assigned profile from verified controls. | 0 / 1 / 2 | Evidence/help: _____ |

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

## Sources and further reading


- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, H5, printed p. 63; source PDF pp. 65–66.
- Leica Geosystems. (n.d.; manufacturer brochure). Leica NA700 Series Automatic Levels. Open publication.
- BC Ministry of Transportation and Transit. (2025). 2025 Standard Specifications for Highway Construction, Volume 1. Open publication.


Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline H6

# Operate milling and reclaiming equipment

Machine operation develops through supervised practice on the selected equipment. The sequence below explains the decisions and observations required; the instructor uses the matching OMM for control positions, settings and exact operating steps.



- Plan job
- Position the machine
- Engage teeth
- Move forward
- Make adjustments
- Control depth
- Set Controls


LEARNING STEP 1

## Plan job

Review the training or job plan, permitted surface, depth, line, material discharge, weather, utilities and exclusion areas. Complete pre-start checks and daily maintenance, identify emergency stopping controls, and agree on communications. The instructor defines the permitted operating envelope and observes the learner. A changed condition requires a new assessment before continuing.

**Control the cut from a verified reference**

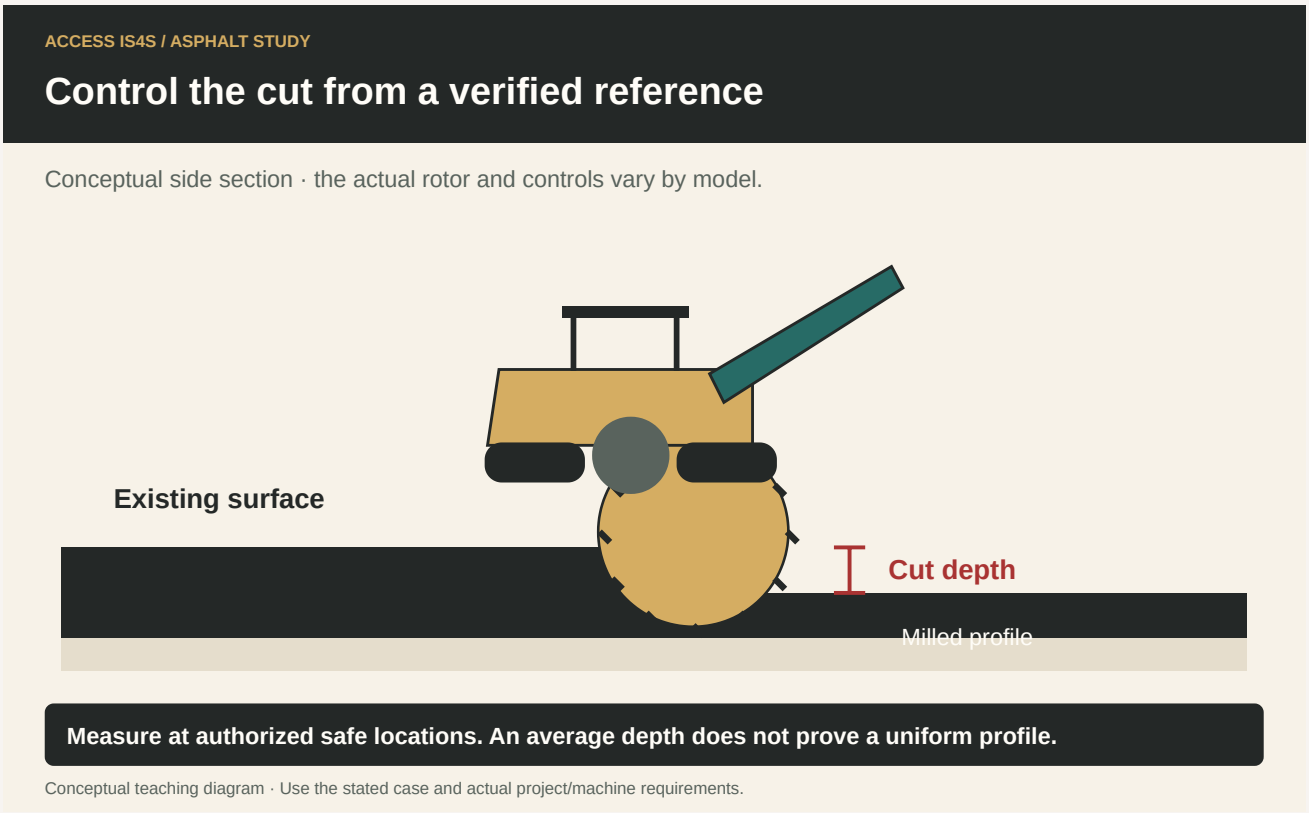


**Note.** ACCESS IS4S. (2026). Control the cut from a verified reference [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

## Position the machine

Position the machine on the approved approach with adequate support and clearance. Align the truck or approved side-discharge arrangement without placing a person between moving equipment. Check the full conveyor movement envelope, including overhead electrical hazards. Use the designated guide and stop if visibility or acknowledgement is lost.

LEARNING STEP 3

## Engage teeth

Engage and lower the cutting system only through the selected machine’s sequence, with guards and dust controls effective and everyone clear. Rotor speed, depth and engagement conditions are model- and task-specific. A rotating drum is not approached for a visual check or manual clearing. Unexpected impact or vibration requires an appropriate stop and report.

LEARNING STEP 4

## Move forward

Move along the verified line with smooth control and continuous observation. Painted lines, string references or the previous cut may guide alignment when authorized. Keep the cutting and discharge processes coordinated; do not focus so closely on a line that people, trucks or obstacles disappear from attention.

**LEARNING STEP 5**

## Make adjustments

Make deliberate, controlled adjustments after identifying the reason. Large repeated changes can create an uneven profile and obscure the cause. Communicate changes to ground crew and allow the machine's response to be evaluated. If the machine behaves unexpectedly, stop for investigation instead of chasing the error with more controls.

**LEARNING STEP 6**

## Control depth


Set and verify cut depth against the approved reference. Check at safe, authorized locations and record station, side and measured depth. Existing surface variation, sensor reference changes and machine movement can influence the result. Average depth alone does not establish an acceptable profile everywhere.

**LEARNING STEP 7**

## Set Controls

Coordinate travel speed, cut depth, machine attitude and discharge capacity within the OMM and plan. Monitor engine/load indicators, dust-control performance and truck availability. Finish with the manufacturer's shutdown sequence and a recorded handover. Competence includes stopping early when the conditions exceed the plan, not only producing material.

### Every numbered component in this track diagram

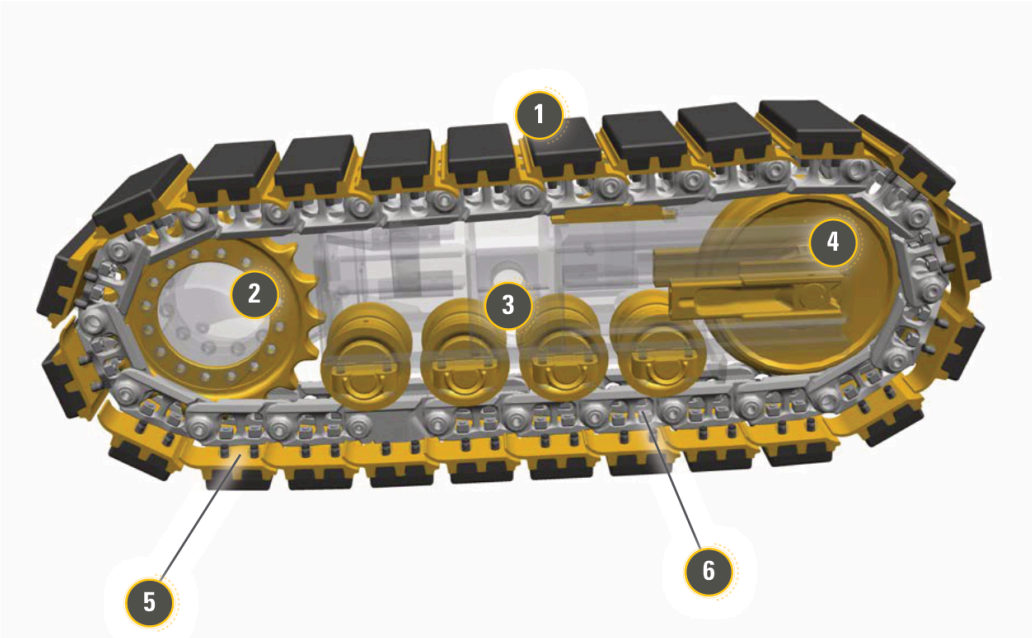


**Note.** Caterpillar. (2026). Cold Planer Parts Reference Guide (QEXQ3131-01 (05/2026), source PDF p. 32). Faithful crop; original labels retained. PM310, PM312, PM313, PM620, PM622, PM820, PM822 and PM825; individual parts/model tables apply. Full source context.

## Worked example · Depth changes across a pass

The approved exercise cut is 40 mm. Safe checks show 40, 41 and then 54 mm near a changed reference surface.

**Think it through.**

Record each location, notify the lead and hold the affected operation for verification of reference and controls. The 54 mm result should not be concealed by an average. Resume with authorized settings after the cause and required correction are resolved.

## Try it and explain your thinking

### Describe a safe supervised sequence for forward–stop–reverse–stop on a flat training pad.

Describe a safe supervised sequence for forward–stop–reverse–stop on a flat training pad.

**Skills you use:** Reading, Communication.

### A 75 m pass takes 15 min of actual travel

A 75 m pass takes 15 min of actual travel. Find average travel speed in m/min; explain why this is not a recommended setting.

**Skills you use:** Numeracy, Problem solving.

### Design a one-pass log that helps the next operator understand a sensor-reference change.

Design a one-pass log that helps the next operator understand a sensor-reference change.

**Skills you use:** Writing, Digital, Collaboration, Creativity and innovation.

## Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Safe access, surroundings and communication maintained. | Pass / hold | Observation: _____ |

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Required energy, heat, movement and public-access controls maintained for the actual task. | Pass / hold | Observation: _____ |
| Precheck, start, monitor and shut down using the matching OMM. | 0 / 1 / 2 | Evidence/help: _____ |
| Move forward/stop/reverse/stop on flat ground and apply parking controls. | 0 / 1 / 2 | Evidence/help: _____ |
| Raise/lower/swing conveyor only within the cleared envelope. | 0 / 1 / 2 | Evidence/help: _____ |
| Set and verify depth; follow the line during an approved supervised cut. | 0 / 1 / 2 | Evidence/help: _____ |
| Coordinate with ground crew and haul driver or approved side-discharge plan. | 0 / 1 / 2 | Evidence/help: _____ |

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

## Sources and further reading


- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, H6, printed p. 65; source PDF pp. 67–68.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 13: Rehabilitation Methods for Asphalt Pavements; source PDF pp. 653–710. Open publication.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.
- National Institute for Occupational Safety and Health. (2015; Publication 2015-105). Best Practice Engineering Control Guidelines to Control Worker Exposure to Respirable Crystalline Silica during Asphalt Pavement Milling. Open publication.


Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline H7

# Follow shut down procedures

Shutdown leaves the machine in a known safe state for people, maintenance and the next shift. A parked machine can still contain heat, pressure and gravity hazards.

Shut down procedures

LEARNING STEP 1

## Shut down procedures


Choose the designated stable parking location with service access and adequate separation from traffic, pedestrians, edges and drainage routes. Plan access for a possible failure to restart. Use level ground where the machine procedure requires it, including accurate fluid checks. Complete the machine's stopping, cooling and shutdown sequence; do not invent a universal idle time.

Place the rotor, conveyor and raised components in their specified safe positions. Apply parking controls and required chocks or blocking. Shutdown and maintenance lockout serve different purposes: if someone will enter a hazardous area or service the machine, apply the full required isolation and verification. A parked machine with the key removed is not automatically ready for service.

After the required safe state is established, walk around from safe access areas. Look for leaks, damage, missing guards, debris and anything that changed during the shift. Do not open a hot pressurized system to complete a routine check. Record defects, meter reading, remaining materials and unresolved work. Mark a machine out of service when required and ensure the status reaches the next operator.


Secure keys, controls, access panels and detachable items according to the site plan. Consider public access after the crew leaves and protect residual hazards. Confirm the final state with the instructor or responsible person. A completed checklist identifies the actual machine, manual procedure and observer; a ticked generic form alone is not evidence of a safe shutdown.

## Leave a known safe state for the next person

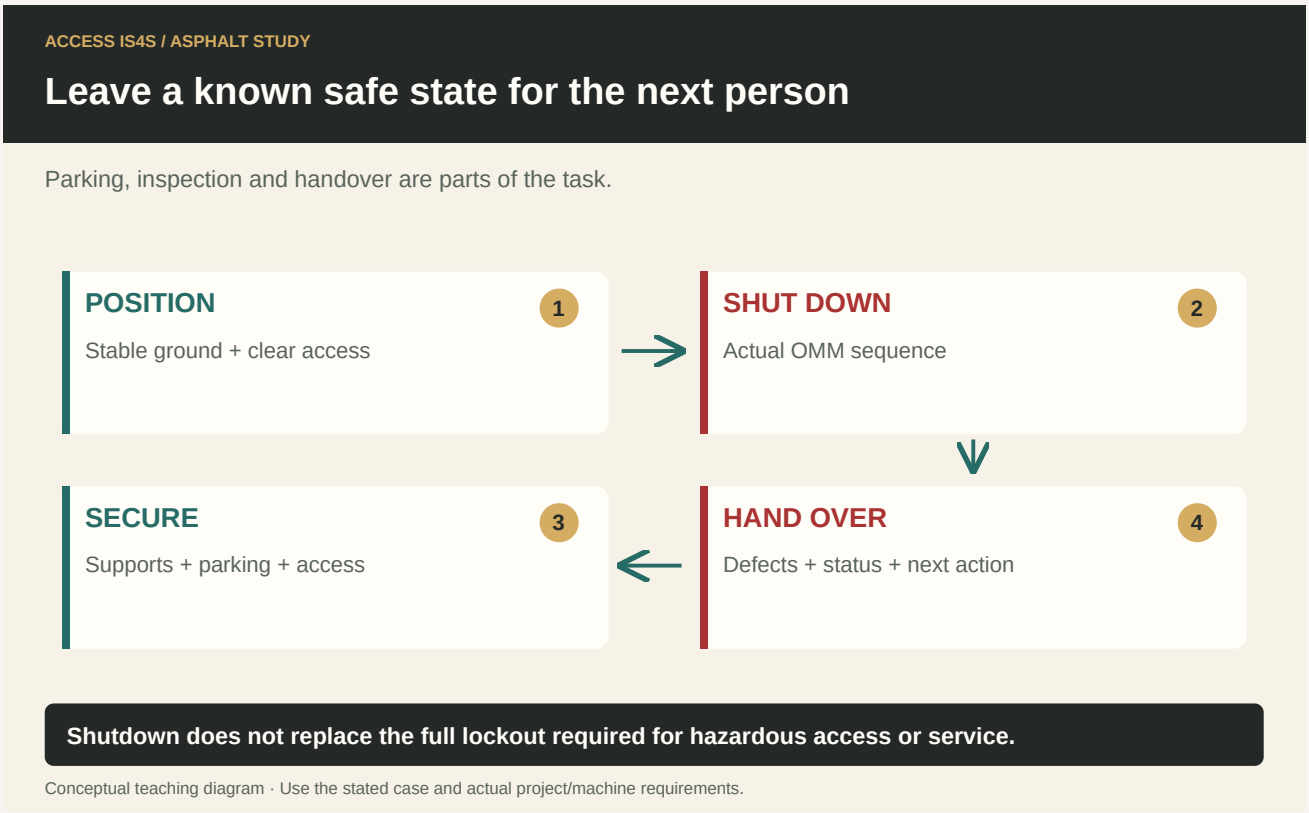


**Note.** ACCESS IS4S. (2026). Leave a known safe state for the next person [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

### Every numbered component in this conveyor diagram

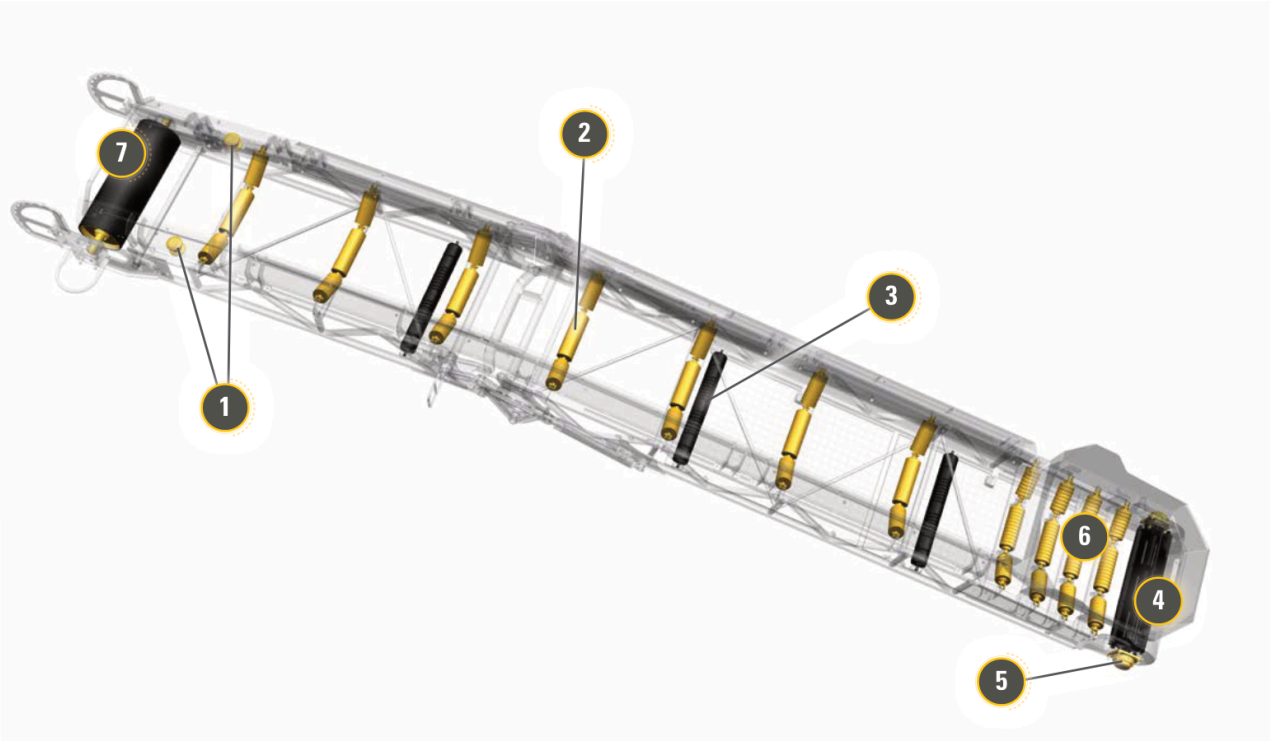


**Note.** Caterpillar. (2026). Cold Planer Parts Reference Guide (QEXQ3131-01 (05/2026), source PDF p. 25). Faithful crop; original labels retained. PM310, PM312, PM313, PM620, PM622, PM820, PM822 and PM825; individual parts/model tables apply. Full source context.

## Worked example · Service access tomorrow

The nearest parking place is level but blocks an emergency access route. Another approved area provides stable ground and service access.

**Think it through.**

Use the approved location that preserves emergency access. Follow the machine shutdown procedure, secure components and parking controls, inspect safely and hand over the final state. Convenience does not justify blocking the route.

## Try it and explain your thinking

### Name four items in a useful shutdown handover.

Name four items in a useful shutdown handover.

**Skills you use:** Writing, Collaboration.

### A checklist has ten equally weighted scored items and a learner earns 16/20

A checklist has ten equally weighted scored items and a learner earns 16/20. A critical parking check failed. Is the learner released?

**Skills you use:** Numeracy, Problem solving.

### A colleague wants to inspect beneath a raised conveyor after shutdown

A colleague wants to inspect beneath a raised conveyor after shutdown. Explain the missing decision.

**Skills you use:** Communication, Reading.

## Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

The outline specifies a minimum 80% checklist result for this task. Score the 3 task criteria out of 6; require at least 5 points and all critical items passed. This local scoring rubric operationalizes the checklist; it is not a separate certification. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Safe access, surroundings and communication maintained. | Pass / hold | Observation: _____ |
| **Critical:** Required energy, heat, movement and public-access controls maintained for the actual task. | Pass / hold | Observation: _____ |

| What the observer checks | Result | Evidence |
|---|---|---|
| Select a stable parking location preserving access. | 0 / 1 / 2 | Evidence/help: _____ |
| Complete the actual shutdown and component-support procedure. | 0 / 1 / 2 | Evidence/help: _____ |
| Inspect safely, secure access and communicate defects. | 0 / 1 / 2 | Evidence/help: _____ |

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

## Sources and further reading


- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, H7, printed p. 67; source PDF pp. 69–69.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 10: De-energization and Lockout. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 16: Mobile Equipment. Open publication.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.


Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline H8

# Transport milling and reclaiming equipment

Transport is a planned operation involving machine configuration, carrier capacity, route and load securement. The person driving the carrier and the person moving the machine need a shared plan and clearly assigned responsibilities.



- Roles and responsibilities
- Prepare machine for transport
- Loading and unloading procedures


LEARNING STEP 1

## Roles and responsibilities

The carrier/driver checks legal loading, axle and vehicle ratings, route/permit requirements and cargo securement within their role. The designated machine operator follows the OMM loading procedure. A trained ground guide controls the agreed communication from a safe position. Do not assume a job title automatically authorizes loading. Confirm who checks ramp suitability, machine mass/configuration, attachments and final securement before movement.

**Loading needs a shared plan**

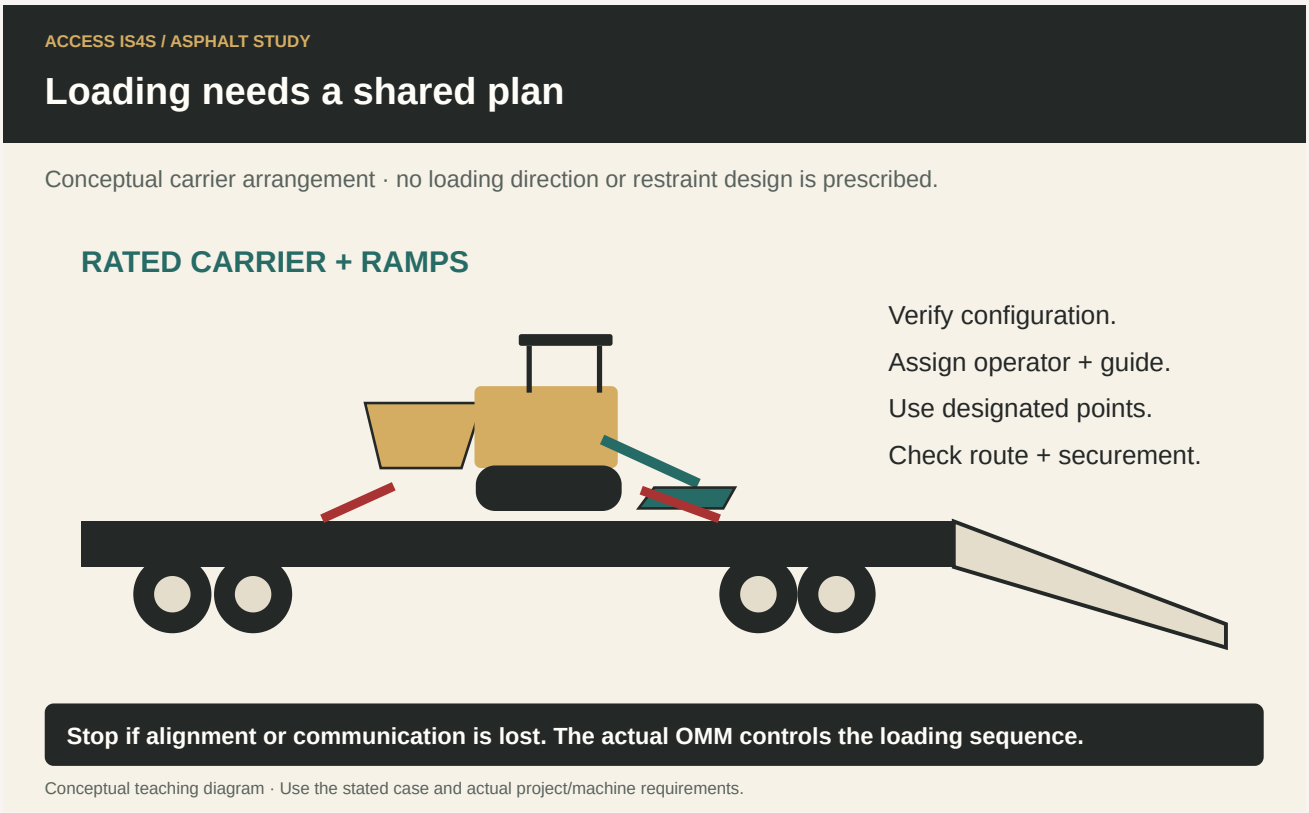


**Note.** ACCESS IS4S. (2026). Loading needs a shared plan [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

## Prepare machine for transport


Prepare the machine in its specified transport configuration: conveyor, guards, attachments, locks and loose items. Remove attachments only with the approved handling method and rated lifting/rigging equipment where required. Know the actual mass, dimensions and centre-of-gravity implications of fitted equipment. Use designated tie-down points; a convenient handrail or hydraulic line is not one. Secure detached items as separate cargo. Retain guards needed for safe loading.

LEARNING STEP 3

## Loading and unloading procedures

Inspect the carrier, ramps, approach and ground for capacity, support, alignment and traction. Establish a controlled area and agreed stop signal. Follow the machine's direction, speed and configuration requirements when crossing changes in slope. Stop if a guide is lost or alignment becomes uncertain. After positioning, apply parking/support requirements and the compliant securement system. National Safety Code Standard 10 and applicable BC rules govern the arrangement; chain count alone does not prove adequate restraint. At unloading, control the machine before releasing restraints in the authorized sequence.

## Add the whole load before comparing ratings

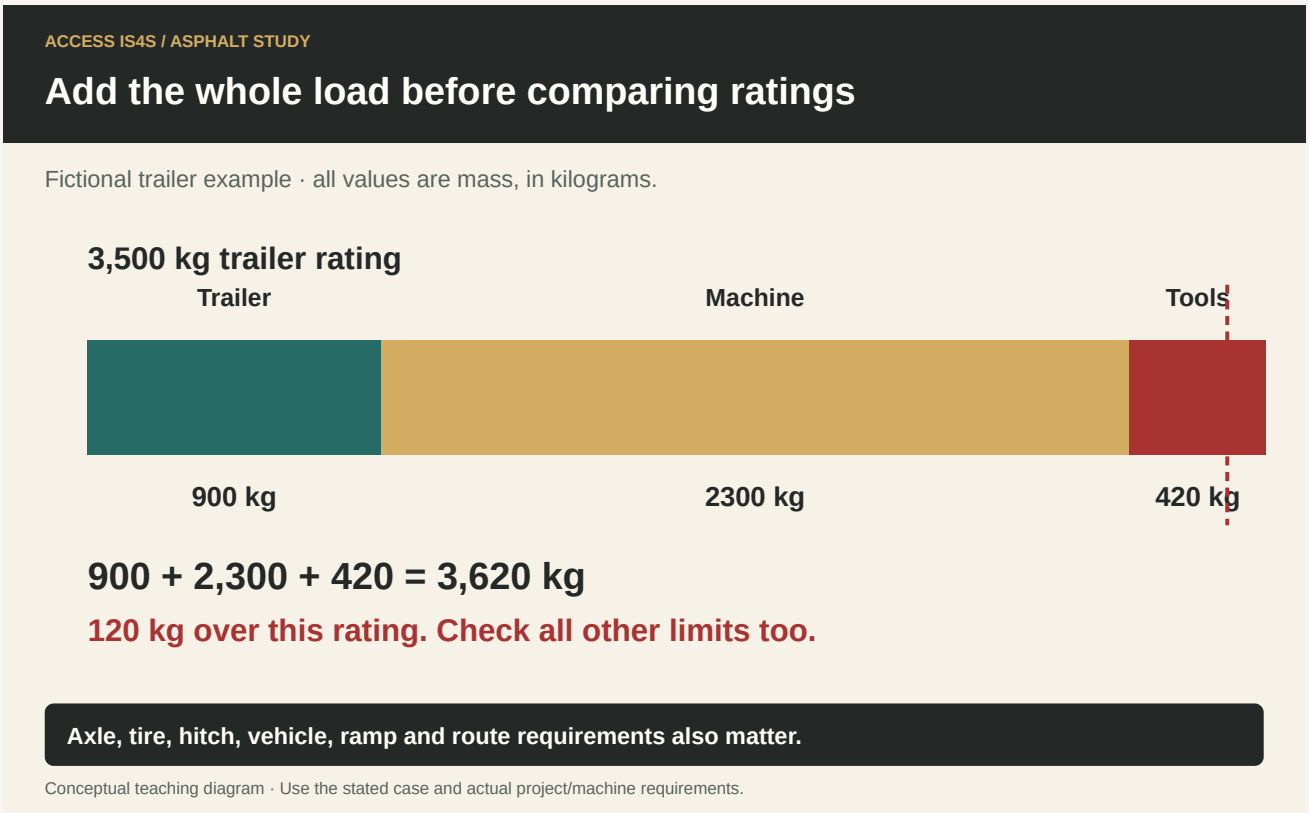


**Note.** ACCESS IS4S. (2026). Add the whole load before comparing ratings [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

## Worked example · A mass record that excludes attachments

The transport plan lists a base machine mass of 19,800 kg. A fitted conveyor option and attachments add 1,250 kg.

**Think it through.**

Planned machine load is at least 21,050 kg before any other cargo. Confirm actual configuration, carrier/ramp/axle ratings and route requirements. The base-machine figure is insufficient for release; obtain the transport lead’s verified plan.

## Try it and explain your thinking

### A carrier’s fictional available payload is 22,000 kg

A carrier’s fictional available payload is 22,000 kg. Machine plus attachments is 21,050 kg and separate equipment is 1,200 kg. Find the excess.

**Skills you use:** Numeracy, Problem solving.

### List information needed before selecting tie-downs.

List information needed before selecting tie-downs.

**Skills you use:** Reading, Writing.

### During loading the guide disappears from view

During loading the guide disappears from view. What happens next?

**Skills you use:** Communication, Collaboration, Adaptability.

## Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Safe access, surroundings and communication maintained. | Pass / hold | Observation: _____ |

| What the observer checks | Result | Evidence |
|---|---|---|
| **Critical:** Required energy, heat, movement and public-access controls maintained for the actual task. | Pass / hold | Observation: _____ |
| Verify roles, carrier/ramp suitability and transport configuration. | 0 / 1 / 2 | Evidence/help: _____ |
| Prepare attachments and approved tie-down points. | 0 / 1 / 2 | Evidence/help: _____ |
| Demonstrate controlled loading preparation and final securement checks within the planned time without rushing safety. | 0 / 1 / 2 | Evidence/help: _____ |

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

## Sources and further reading


- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, H8, printed p. 68; source PDF pp. 70–70.
- Canadian Council of Motor Transport Administrators. (June 2013). National Safety Code Standard 10: Cargo Securement. Open publication.
- Canadian Council of Motor Transport Administrators. (May 2016). Cargo Securement Standard: Interpretations and Guidance. Open publication.
- Province of British Columbia. (Web snapshot: October 30, 2026). Cargo Securement. Open publication.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.


Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Integrated practice · all nine Skills for Success

# Hand over a controlled milling pass

> This is a complete fictional classroom case. It does not describe an actual community, Nation, employer or project. Learners may use the supplied case without disclosing personal or cultural knowledge.

A fictional approved training strip is 60 m × 2 m with a 0.04 m nominal cut. Safe recorded checks at three locations are 40, 41 and 53 mm. The last location follows a disturbed reference. A draft handover states “average depth acceptable; continue.” No project tolerance is supplied. The discharge route remains within a controlled area.

## Reading · Check the facts

Identify the controlling facts, missing information and one unsupported statement in the brief.

## Writing · Make the handover useful

Draft a concise handover with location, quantities, status and the next responsible action.

## Numeracy · Calculate and check

Show the case calculation with units and an independent reasonableness check.

## Digital · Direct AI and verify the files

Use an available AI assistant to draft a findings table and editable record from this brief. Request DOCX or a structured document, XLSX with formulas where useful, and a PDF/HTML reading copy. Audit every claim and reopen the actual outputs.

## Problem solving · Investigate the discrepancy

Explain the discrepancy, what evidence is needed and who should authorize the next step.

## Communication · Send and check the message

Brief a partner, ask for a check-back and repair one misunderstanding if it occurs.

## Collaboration · Review together

Agree reviewer/author roles, complete a review and record each person’s contribution.