
ACCESS · INDIGENOUS SKILLS 4 SUCCESS

Paver operation

Volume 6 · I1, I2, I3, I4, I5, I6, I7, I8, I9

Classroom development edition · 30 October 2026

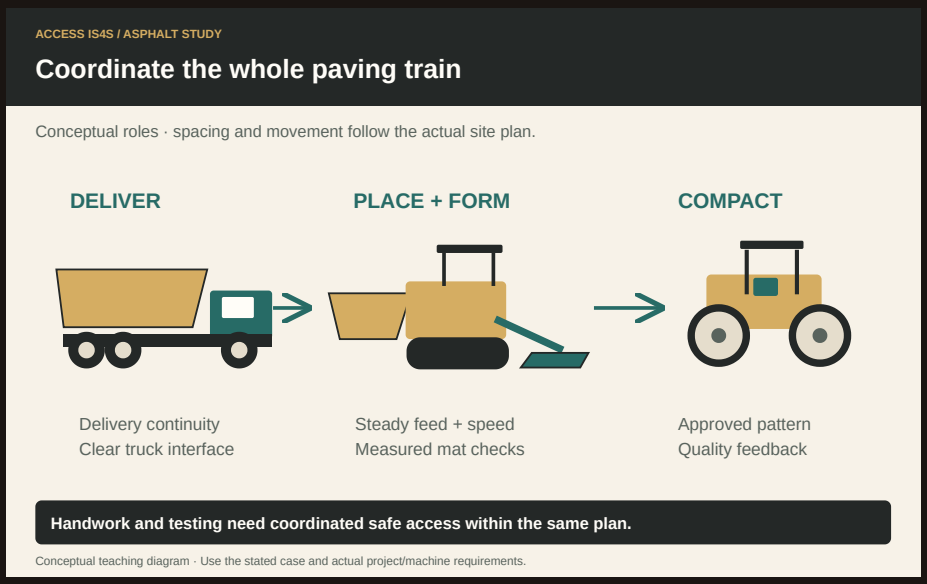

ACCESS IS4S. (2026). Coordinate the whole paving train [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

In this volume

1. How to use the volume and key terms
2. Asphalt placement process
3. Paving machine equipment and attachments
4. Paver work safety procedures
5. Asphalt paver operator roles and responsibilities
6. Paving machine maintenance
7. Markers, grades and stakes
8. Operate asphalt paver
9. Follow shut down procedures
10. Transport paver
11. Keep delivery and mat records consistent

Use this volume

This volume provides complete classroom readings, worked examples, named practice tasks and answer guidance for paver operation. Follow the learning route in each chapter, study the labelled figures and explain your reasoning. The separate answer book contains the worked keys and observation records.

Care for people, place and the next person using the work runs through the cases. Local First Nations, Métis and Inuit learners and partners bring distinct knowledge and priorities. Participation does not require sharing personal stories or cultural teachings, and no diagram claims to represent a Nation's protocol.

> Classroom authoring is complete for the listed competencies. Qualified technical review, actual fleet/site matching, a local teaching pilot and observed practical qualification are separate requirements. The practical records are ready for an instructor to configure and use; they do not certify unobserved work.

Read the picture, then test the idea

1. Identify the object, process or quantity shown.
2. Read labels, units and the figure's stated limits.
3. Connect the image to the chapter explanation.
4. Try the exercise and check against evidence.
5. Explain the result to another person and revise if needed.

Use AI as a checked working tool

Claude and ChatGPT can help explain provided documents and create supported files. Claude Code, Cowork and Codex can help with permitted multi-file tasks and repeatable workflows when their tools are available. Give a clear purpose, named sources, output formats, limits and checks. Ask for a findings table with page/cell evidence; verify it against the source. Reopen DOCX, XLSX, HTML or PDF outputs. For study audio/video, verify the script, captions, diagrams and actual playback. A generated result is not a technical approval.

Keep the term with its meaning

AGGREGATE
Mineral particles forming the solid skeleton of the mixture or granular layer.

BINDER
The asphalt material that coats and binds the aggregate in the specified mixture.

COMPACTED THICKNESS
Layer thickness after the required compaction process; distinct from loose depth behind the screed.

DENSITY REFERENCE
The specified comparison value used as the denominator of a percent-density calculation.

GRADATION
Distribution of aggregate particle sizes, commonly expressed as cumulative percent passing specified sieves.

HEAD OF MATERIAL
The quantity/distribution of mix immediately in front of the screed.

JOB MIX FORMULA (JMF)
The accepted mixture proportions and properties under the applicable quality/contract process.

LOCKOUT
Isolation, securing and verification of hazardous energy for work requiring protection.

LOT / SUB-LOT
Defined portions of work used for sampling, testing and acceptance under the contract.

OMM
Operation and maintenance manual matched to the actual machine, serial range and configuration.

RAP
Reclaimed asphalt pavement: recovered material containing aggregate and aged binder.

SDS
Safety data sheet for the actual product; read with its label and workplace procedure.

SCREED
The paver assembly that forms the mat; its response depends on setup, material and movement.

STATION / OFFSET
Location along an alignment / distance and direction from a defined reference.

TCP
Traffic control person with the required training and assigned role.

TRACEABILITY
A record connecting material, location, time, sample, result and authorized decision.

SVG
Scalable vector graphics: useful for clear diagrams whose labels and geometry must be checked.

DOCX / XLSX
Editable document / spreadsheet workbook; verify actual content and formulas after creation.

PDF / HTML
Page-based reading copy / browser document; inspect completeness, access and linked resources.

MP3 / MP4 / VTT
Audio file / video container / timed web captions; test playback and retain a transcript.

Study chapter · Outline I1

Asphalt placement process

Asphalt placement links surface preparation, delivery, paver setup, screed control and rolling. A consistent process helps produce the intended thickness, bond and surface while keeping the whole crew informed.


- Place prime and tack coats
- Where to position the Paver
- Ready the Paving Machine
- Lower Screed on to blocks
- Place Haul Truck Loads in Hopper
- Place the asphalt product
- Compact asphalt

LEARNING STEP 1

Place prime and tack coats

Prime and tack have different purposes. A prime treatment may prepare an approved absorbent granular surface; tack promotes bonding between specified pavement surfaces or lifts. Follow the actual product, surface preparation, application rate, curing/breaking and traffic restrictions in the project procedure. Inspect the label and SDS and protect drainage and public routes. Do not substitute one treatment for the other or pave over an unready surface because a truck has arrived.

Coordinate the whole paving train

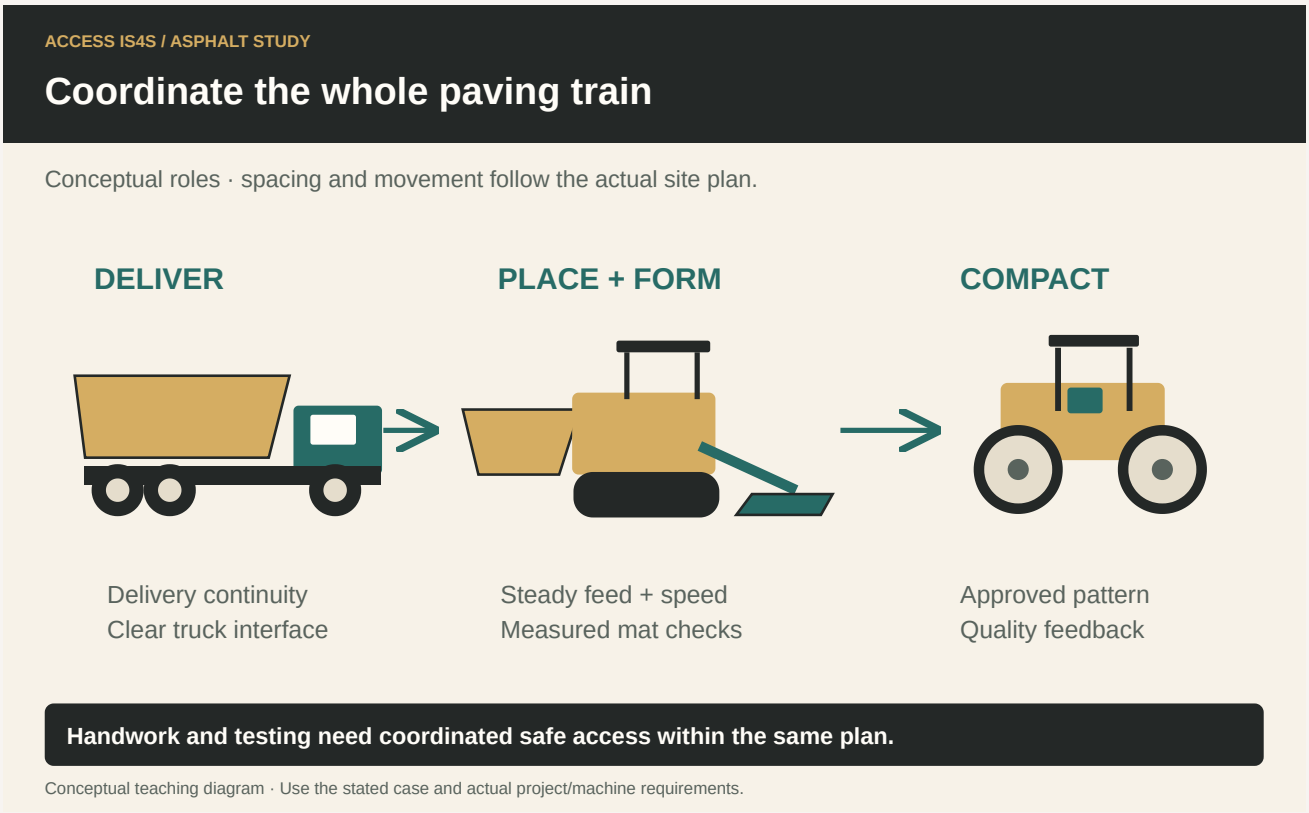

Note. ACCESS IS4S. (2026). Coordinate the whole paving train [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Where to position the Paver

Position the paver within the planned asphalt train: delivery, placement, handwork and breakdown/intermediate/finish rolling. Confirm line, width, starting joint, access and truck approach. Establish safe separation and communication using the site plan, machine instructions and risk assessment. A diagram of the train explains roles, not universal spacing.

LEARNING STEP 3

Ready the Paving Machine


Complete inspection, fluid checks, guards, controls, alarms and the required warm-up. Select the machine's specified operating mode and engine conditions; "full power" is not a universal instruction for every function. Check the fitted feed and grade-control systems and agree who controls each adjustment. Resolve faults before production.

LEARNING STEP 4

Lower Screed on to blocks

Set the screed on the specified starting support/block arrangement and establish initial thickness, crown and extension alignment. Loose thickness must allow for the actual mixture's compaction behaviour and project trial results. A fixed 20% allowance is not universal. Keep hands and feet out of the lowering zone; move or retrieve blocks only through the approved safe sequence.

Inside the paver: the feeder system

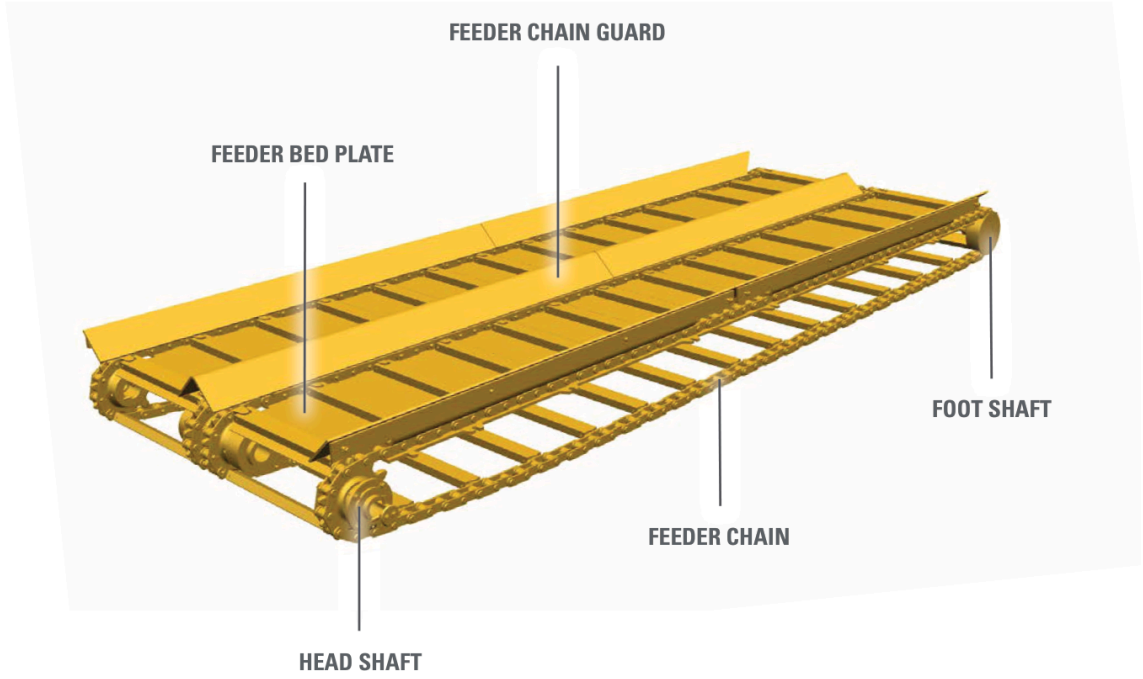

Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 11). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

LEARNING STEP 5

Place Haul Truck Loads in Hopper

Coordinate the haul truck through the designated signal system. Confirm alignment, clear the pinch zone and control the transfer without striking or disturbing the paver. Hopper-wing operation and load level follow the machine procedure and paving plan. Avoid uncontrolled emptying or repeated material surges. Watch overhead hazards when a truck body rises.

LEARNING STEP 6

Place the asphalt product

Maintain appropriate paving speed and a consistent head of material at the screed. Conveyors carry mix rearward; augers distribute it across the width. The floating screed responds to several interacting factors, so abrupt changes can affect thickness and texture. Plan longitudinal/transverse joints, overlap and tie-ins using the accepted procedure. Record emerging defects and communicate before repeated adjustments.

LEARNING STEP 7

Compact asphalt


Rolling follows the approved pattern while the mixture is within its effective compaction conditions. Breakdown establishes early compaction; intermediate rolling develops density as required; finish rolling removes marks and completes the surface. Temperature, mixture, support, roller type and weather matter. The paver and roller crews coordinate supply and pace; speed alone does not establish production quality.

A free-floating screed responds to a system

ACCESS IS4S · ASPHALT FOUNDATIONS

A free-floating screed responds to a system

Recognize the five interacting factors before discussing a changed result.

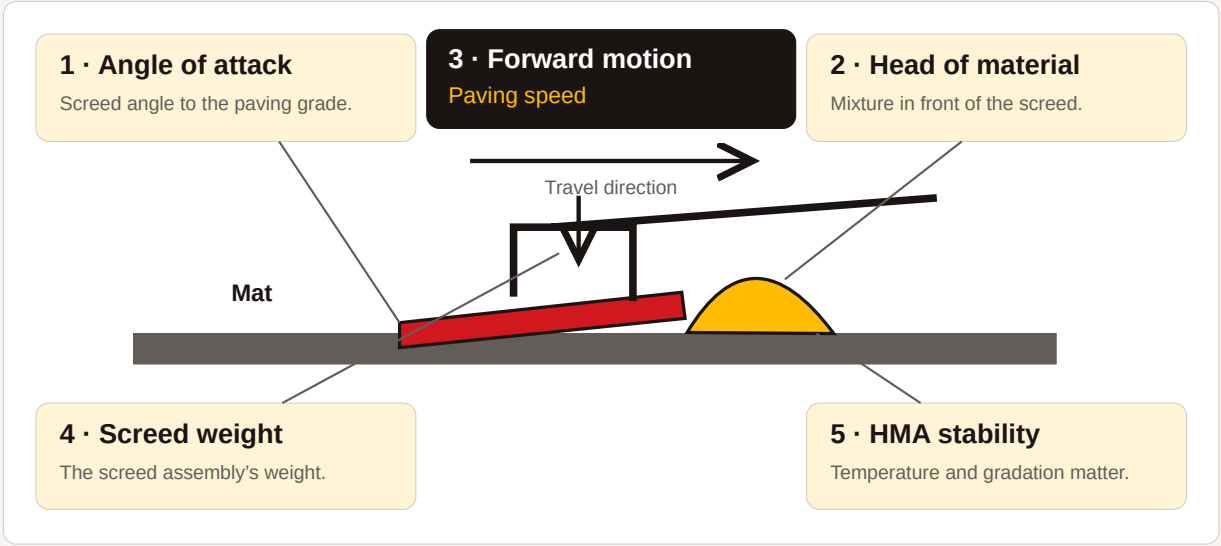

Conceptual redraw · arrows identify relationships, not adjustment instructions or setting values.

Note. Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4). Original instructional adaptation by ACCESS IS4S (2026). Mirrored and simplified the schematic; grouped the five factors in numbered callouts; omitted adjustment procedures and numeric settings. Source locations: [{"figure": "8.16", "printed_page": 383, "pdf_page": 417}, {"section": "8.4.3, five factors", "printed_page": 384, "pdf_page": 418}]. Original contributors: Volvo Construction Equipment Full source context.

Worked example · Convert a trial thickness relationship

A fictional trial produced 50 mm compacted thickness from 62 mm loose thickness. The same approved trial relationship is used to estimate a 45 mm compacted target.

Think it through.

Loose/compacted factor = 62/50 = 1.24. Estimated loose thickness = 45 × 1.24 = 55.8 mm. This is an exercise estimate tied to the stated trial, not a universal setting; confirm with actual placement and compaction checks.

Try it and explain your thinking

Explain and apply the idea

Put surface acceptance, treatment readiness, paver setup, placement and rolling in a useful sequence.

Skills you use: Reading, Problem solving.

A rectangular 50 m × 3 m mat has 0.05 m compacted thickness

A rectangular 50 m × 3 m mat has 0.05 m compacted thickness. Find compacted volume.

Skills you use: Numeracy.

Write a call to the roller lead when delivery is interrupted.

Write a call to the roller lead when delivery is interrupted.

Skills you use: Communication, Collaboration, Adaptability.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Explain the complete placement sequence and treatment distinction.	0 / 1 / 2	Evidence/help: _____
Verify starting support, line and trial-based thickness allowance.	0 / 1 / 2	Evidence/help: _____
Coordinate delivery, placement and compaction with clear role boundaries.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I1, printed p. 69; source PDF pp. 71–71.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 8: Hot Mix Asphalt Paving; source PDF pp. 391–446. Open publication.
- Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888). Asphalt paving process, tractor, screed, material delivery and handwork; model examples vary. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline I2

Paving machine equipment and attachments

A paver consists of a tractor that receives and moves material and a screed that forms the mat. Equipment choice depends on the work, access, production and required result—not only the nominal paving width.

Types of paving machines

Major components


Attachments

LEARNING STEP 1

Types of paving machines

Pavers range from compact pathway or shoulder machines to highway-class equipment. Common nominal categories include 8 ft and 10 ft machines, but actual minimum/maximum widths, extensions and transport dimensions depend on the model. Compare work width, production, turning space, support, transport and fitted options. Light, medium and highway duty describe broad applications rather than interchangeable operating limits. Match the OMM to model, serial range and configuration.

Two main sections of the paver

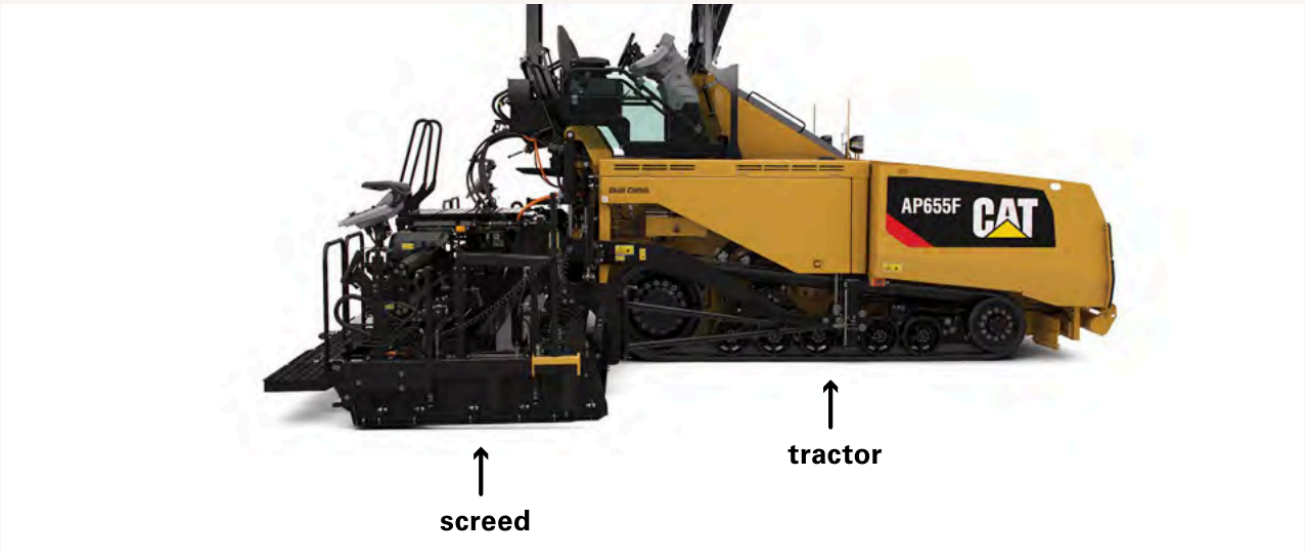


Note. Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888, source PDF p. 63). Faithful crop; original labels retained. Conceptual paver example in the 2016 application guide; this picture does not identify a specific machine serial number. Full source context.

LEARNING STEP 2

Major components

Identify the tractor's hopper and wings, push rollers/truck interface, slat conveyors or other fitted feed system, augers, engine, hydraulics, undercarriage, operator station and grade/slope controls. Wheeled, rubber-tracked and steel-tracked arrangements differ. Identify the screed's tow arms/tow points, main plate, extensions, end gates, heating and vibration/tamper equipment where fitted. Conveyors move material toward the screed; augers spread it; the screed forms the layer. Do not confuse a feed sensor with a grade sensor.

Auger parts: identify the assembly

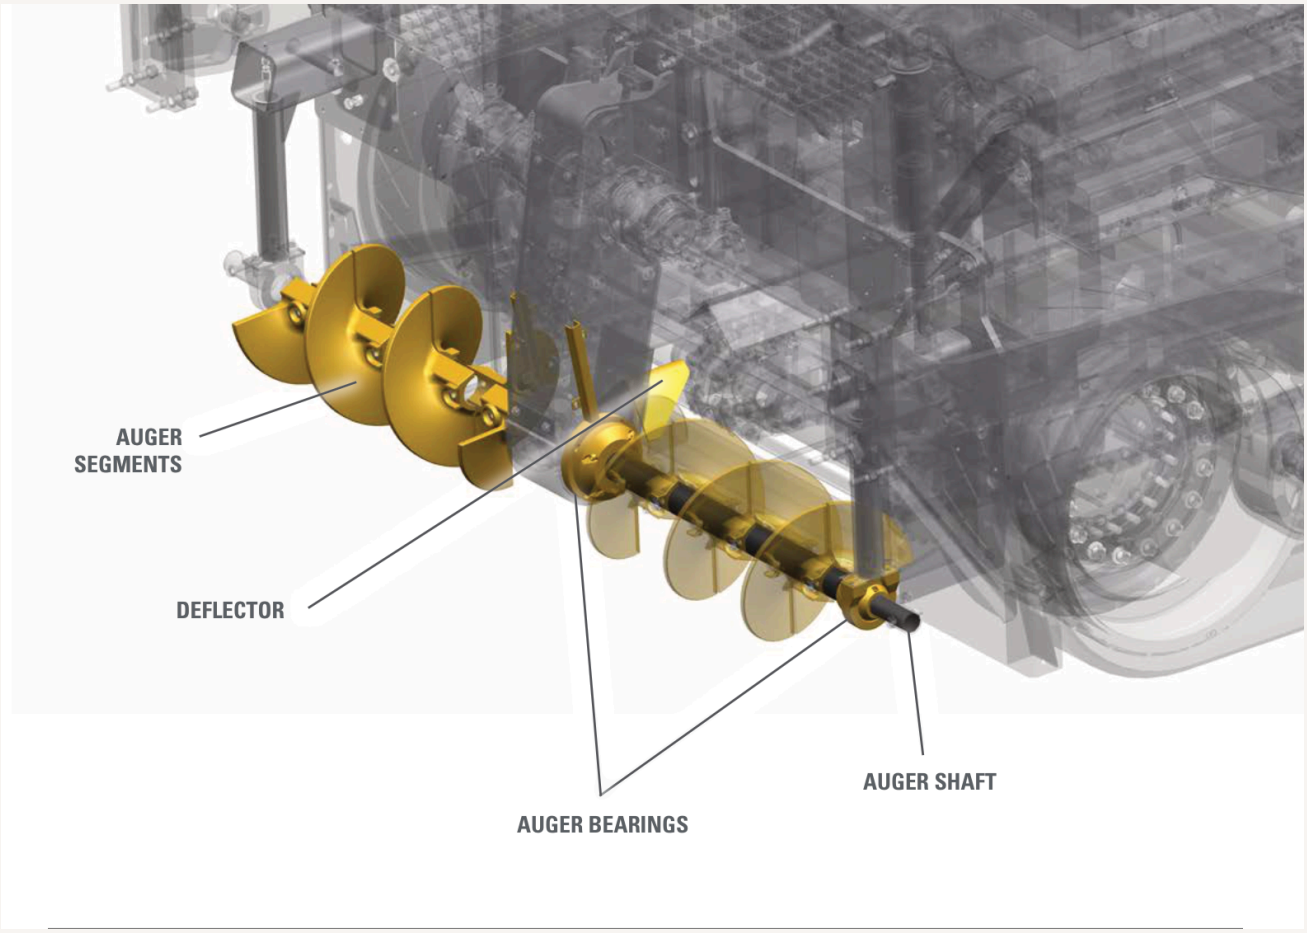

Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 15). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

LEARNING STEP 3

Attachments

A pickup machine can collect a windrow placed by an appropriate delivery system and feed the paver. A material-transfer vehicle or hopper insert may buffer supply or remix material, depending on design. These can reduce certain handling problems but do not guarantee freedom from segregation or a universal productivity increase. Belly-dump and end-dump arrangements require different work plans. Check compatibility, added weight, clearance and operating instructions for every attachment.

Feed sensing and hopper information

SONIC MATERIAL FEED SENSORS


Four sonic transducers mounted above the conveyor discharge and at the end of the augers activate automatically to maintain a preset amount of material ahead of the screed.

Two sonic transducers mounted at the end of the augers automatically maintain a preset amount of material ahead of the screed.



PADDLE MATERIAL FEED SENSORS

Two paddle sensors located in the auger chamber activate the conveyors to automatically maintain the desired amount of material ahead of the screed.

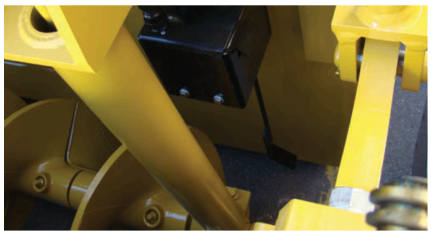

HOPPER MATERIAL LEVEL AND TEMPERATURE SENSOR

Mounts above the hopper to monitor the amount of material and the temperature of the mix using a single infrared temperature sensor. Material level and temperature information is available on the machine display at the operator station.

Not compatible with certain serial numbers. Before ordering, provide machine serial number to your Cat dealer.



Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 43). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

Worked example · Two sensor jobs

A diagram labels one sensor near the auger and another following a reference beside the machine.

Think it through.

The feed sensor can control the material supply in its assigned zone; a grade sensor follows a reference for elevation control. Confirm the actual model and function from the manual. Similar-looking sensors do not necessarily control the same system.

Try it and explain your thinking

Label ten parts on the supplied paver figure and state each function.

Label ten parts on the supplied paver figure and state each function.

Skills you use: Reading, Communication.

Convert nominal 8 ft and 10 ft widths to metres

Convert nominal 8 ft and 10 ft widths to metres. Do these establish the actual screed settings?

Skills you use: Numeracy, Problem solving.

Ask an AI to create a component table from the supplied figure and caption

Ask an AI to create a component table from the supplied figure and caption. How will you audit it?

Skills you use: Digital, Writing, Creativity and innovation.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____

What the observer checks	Result	Evidence
Identify tractor and screed assemblies accurately.	0 / 1 / 2	Evidence/help: _____
Distinguish feed, grade and slope-control functions.	0 / 1 / 2	Evidence/help: _____
Check attachment compatibility and document scope.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I2, printed p. 70; source PDF pp. 72–72.
- Caterpillar. (Various editions). Original machine component figures, with publication/page/model records. Open publication.
- Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888). Asphalt paving process, tractor, screed, material delivery and handwork; model examples vary. Open publication.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 8: Hot Mix Asphalt Paving; source PDF pp. 391–446. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline I3

Paver work safety procedures

Safe paver work depends on a shared plan and controlled movement around hot material and moving machinery. The ground crew, truck driver and screed crew need the same understanding of the work boundary.


- Interpret job plan
- Awareness of machine-specific safety
- Traffic control requirements
- Use proper PPE
- Lockout procedures
- Secure machine for safety

LEARNING STEP 1

Interpret job plan

Brief the path, paving pattern, thickness, crown, joints, obstacles, utilities and public access. Identify the approved drawing and changes. Establish who directs truck movement, who controls the screed and how an emergency stop is communicated. Protect entrances and services according to the actual access plan.

Keep the truck–paver interface clear

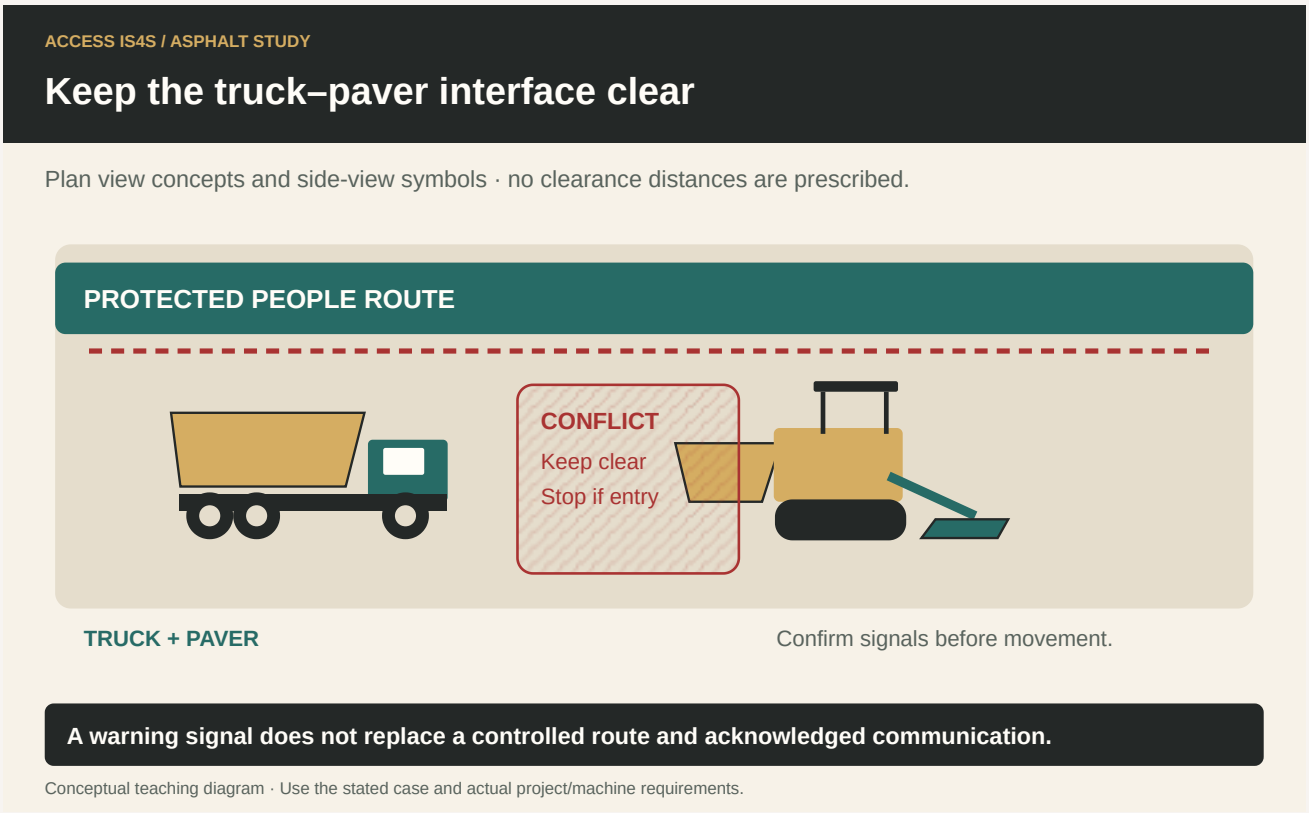

Note. ACCESS IS4S. (2026). Keep the truck–paver interface clear [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Awareness of machine-specific safety

Recognize hopper-wing and truck-interface pinch points, conveyor/auger entanglement, hot mix and heating systems, fumes, noise, hydraulic pressure, blind areas and moving rollers. Never enter a hopper or reach into a feed system because motion has paused. Keep clear of the machine's swept path and raised components. Use specified blocking/support before work requiring access.

LEARNING STEP 3

Traffic control requirements

Use the traffic-control plan for signs, devices, trained personnel and communication. Public traffic control and guiding a delivery truck are distinct roles. Reassess as the paver advances and access points change. Stop affected movements when the route or signals become unclear; do not assume high-visibility clothing makes a worker visible to every operator.

LEARNING STEP 4

Use proper PPE

Use the required footwear, head, eye, hearing, visibility and heat/chemical protection selected for the task. Check condition and fit. Respiratory protection needs the applicable program and controls. The employer ensures required PPE is used and maintained; worker/employer supply responsibilities follow current Part 8 and any agreements. PPE does not remove a crush or entanglement hazard.

LEARNING STEP 5

Lockout procedures


Apply the machine-specific lockout procedure for service, clearing or hazardous access. Address engine/electrical, hydraulic, gravity, heat and stored energy. Secure and verify the safe state before work. A night switch, stopped engine or emergency-stop button alone is not proof of complete isolation. Reinstatement follows the authorized procedure with people clear and guards restored.

LEARNING STEP 6

Secure machine for safety

Park at the designated stable location, position and support the screed/attachments as instructed, apply parking controls and required chocks, and secure access. Record defects and communicate out-of-service status. Protect people who may approach after the crew leaves.

Stopped is not the same as isolated

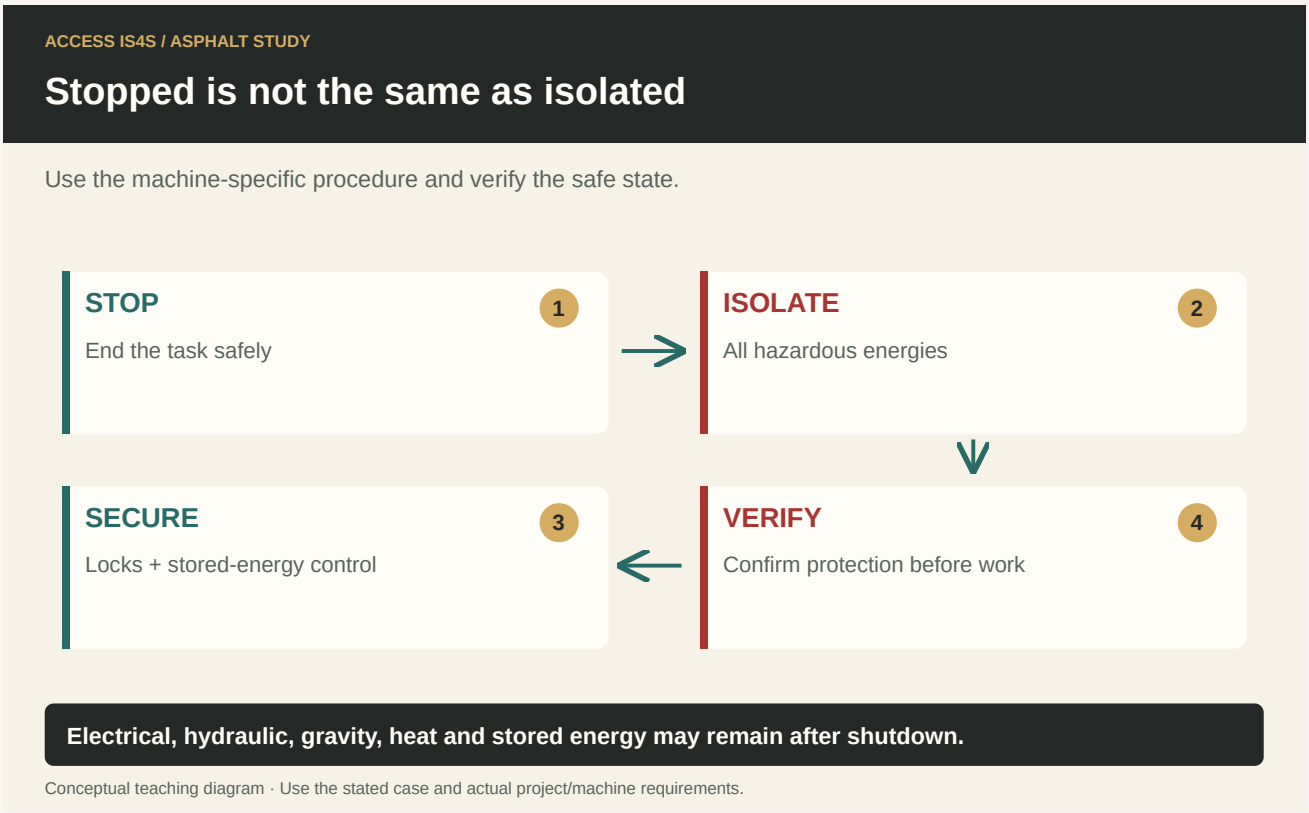

Note. ACCESS IS4S. (2026). Stopped is not the same as isolated [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

Worked example · A stopped auger

Material stops moving, and a worker reaches toward the auger to remove a lump.

Think it through.

Stop the approach and keep clear. A pause in automatic feed does not isolate the auger; it may restart. Use the approved stopping, lockout, stored-energy and clearing procedure with authorized personnel.

Try it and explain your thinking

Name the safe response when the truck guide’s signal is lost.

Name the safe response when the truck guide’s signal is lost.

Skills you use: Communication, Collaboration.

A revised layout moves the paver edge 0.4 m toward a public route

A revised layout moves the paver edge 0.4 m toward a public route. What must be checked before proceeding?

Skills you use: Numeracy, Problem solving, Adaptability.

Prepare a three-field defect note for a damaged hopper guard.

Prepare a three-field defect note for a damaged hopper guard.

Skills you use: Writing, Digital.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____

What the observer checks	Result	Evidence
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Use selected PPE and identify machine-specific hazards.	0 / 1 / 2	Evidence/help: _____
Demonstrate full approved lockout and verification.	0 / 1 / 2	Evidence/help: _____
Secure the machine with required supports, parking controls and access protection.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I3, printed p. 71; source PDF pp. 73–74.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 10: De-energization and Lockout. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 16: Mobile Equipment. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 18: Traffic Control. Open publication.
- Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888). Asphalt paving process, tractor, screed, material delivery and handwork; model examples vary. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline I4

Asphalt paver operator roles and responsibilities

The paver operator maintains alignment and a steady process while coordinating the truck and screed crews. Good operation includes noticing a developing problem early and communicating it clearly.


- Position Paver
- Ready the Paver
- Follow the line
- The transition process
- Maintain consistent “head”
- Positioning of haul trucks
- Signals/communication
- Obstacles and overhead hazards

LEARNING STEP 1

Position Paver

Position the paver to the approved starting line and joint with sufficient working room. Check the first pass carefully because it may guide later passes. Avoid unnecessary manoeuvres and abrupt corrections. Confirm the ground support and the whole machine’s clearance, including extensions and attachments.

Coordinate the whole paving train

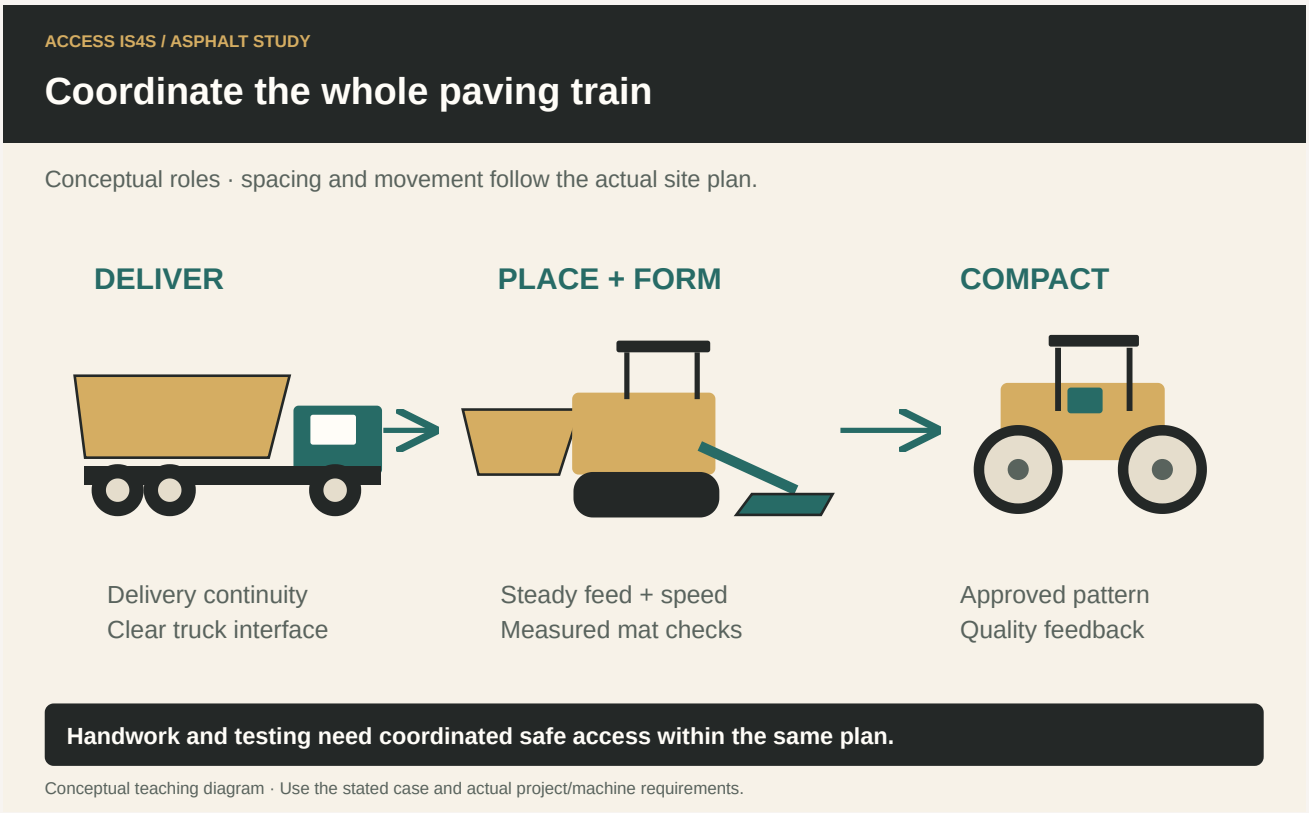

Note. ACCESS IS4S. (2026). Coordinate the whole paving train [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Ready the Paver

Complete prechecks, appropriate warm-up and screed preparation. Heating prevents material sticking to cold plates; overheating can damage the screed. Follow the fitted heating system's procedure and verify ready status. Set starting supports and thickness through the agreed screed setup; never use an assumed generic block size.

LEARNING STEP 3

Follow the line

Follow the authorized reference, which may be stringline, a suitable edge, laser or other grade/alignment system. Look ahead and make smooth steering changes. Check that the reference remains valid and protected. Automatic controls can follow an incorrect or disturbed reference faithfully, so independent checks remain necessary.

LEARNING STEP 4

The transition process


Coordinate truck changes before the hopper starves or receives a sudden surge. The delivery rate, available buffer, paver speed and planned stopping method must work together. Communicate delays early. Follow the machine's hopper-wing and feed procedure rather than repeatedly cycling wings as a universal habit.

LEARNING STEP 5

Maintain consistent "head"

A consistent head of material in front of the screed supports stable operation. It is the controlled quantity/distribution at the screed, not simply a completely full hopper. Monitor feed sensors, conveyors and augers as fitted. Changes in head, speed and mixture conditions can alter the mat. Coordinate corrective action with the screed operator.

Identify grade and slope sensors

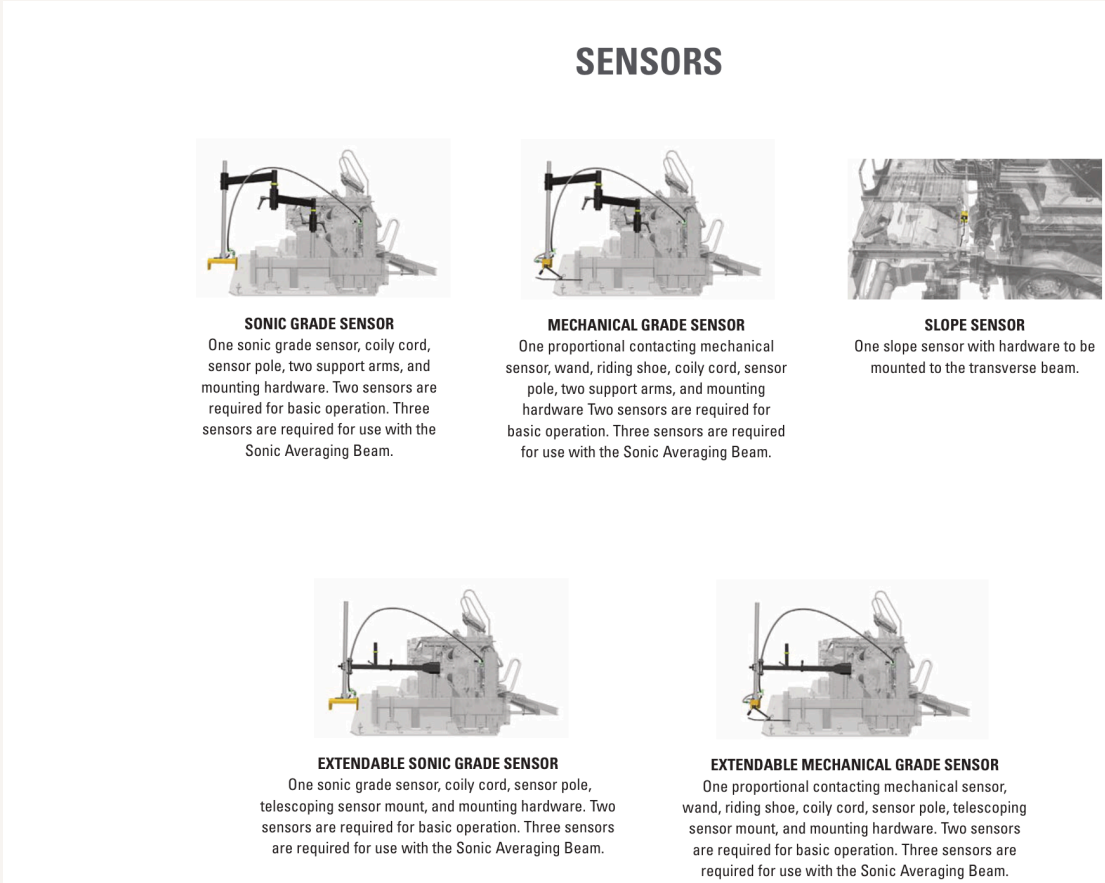

Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 34). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

LEARNING STEP 6

Positioning of haul trucks

Guide haul trucks into the approved alignment using the designated signalling arrangement. Keep people clear of the truck/paver interface and verify clearance before unloading. Avoid impacts that disturb the paver. Raised bodies change overhead clearance and stability considerations; the driver follows the vehicle procedure and site plan.

LEARNING STEP 7