Signals/communication

Use agreed, deliberate signals that the intended driver can see through the appropriate mirror or communication system. Obtain acknowledgement. A horn’s meaning must be agreed, not guessed. One designated person directs the movement; anyone can call an emergency stop. Lost or conflicting signals mean stop.

LEARNING STEP 8

Obstacles and overhead hazards

Scan the route and overhead envelope for utilities, structures, branches, attachments, other machines and people. Account for the truck body, hopper wings and screed extensions as they move. Electrical approach limits depend on the actual system and required controls; do not substitute a guessed distance. Escalate an unresolved obstacle before entering its zone.

Feed sensing and hopper information

SONIC MATERIAL FEED SENSORS


Four sonic transducers mounted above the conveyor discharge and at the end of the augers activate automatically to maintain a preset amount of material ahead of the screed.

Two sonic transducers mounted at the end of the augers automatically maintain a preset amount of material ahead of the screed.



PADDLE MATERIAL FEED SENSORS

Two paddle sensors located in the auger chamber activate the conveyors to automatically maintain the desired amount of material ahead of the screed.

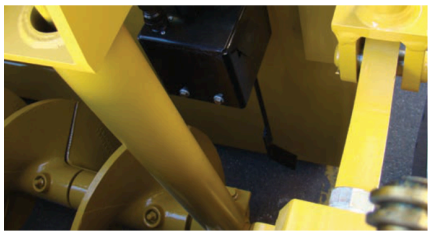

HOPPER MATERIAL LEVEL AND TEMPERATURE SENSOR

Mounts above the hopper to monitor the amount of material and the temperature of the mix using a single infrared temperature sensor. Material level and temperature information is available on the machine display at the operator station.

Not compatible with certain serial numbers. Before ordering, provide machine serial number to your Cat dealer.



Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 43). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

Worked example · Hopper level is not the whole story

The hopper contains mix, but the right side of the screed has a visibly reduced material head and texture changes.

Think it through.

Report the side and location, coordinate with the screed operator and inspect the feed-system status from safe positions. A full hopper does not prove uniform delivery across the screed. Use authorized adjustments and record the response; do not reach into the feed system.

Try it and explain your thinking

Explain the difference between hopper contents and head of material.

Explain the difference between hopper contents and head of material.

Skills you use: Reading, Communication.

A 20 t load lasts 8 min at a steady fictional rate

A 20 t load lasts 8 min at a steady fictional rate. Find t/min; why is it not a universal paver speed?

Skills you use: Numeracy, Problem solving.

Draft a truck-change handover that includes an access constraint.

Draft a truck-change handover that includes an access constraint.

Skills you use: Writing, Collaboration, Adaptability.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____

What the observer checks	Result	Evidence
Align and follow a verified reference.	0 / 1 / 2	Evidence/help: _____
Coordinate truck transitions and consistent material head.	0 / 1 / 2	Evidence/help: _____
Recognize and respond to obstacles and communication loss.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I4, printed p. 73; source PDF pp. 75–75.
- Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888). Asphalt paving process, tractor, screed, material delivery and handwork; model examples vary. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 3: Rights and Responsibilities. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 16: Mobile Equipment. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline I5

Paving machine maintenance

A clean, correctly serviced paver feeds material consistently and gives the crew safe access. Daily maintenance follows the selected machine's schedule and safe conditions, with defects recorded for the next shift.


- Service lubrication system (greasing)
- Service air intake system as required (air filters/pre cleaners)
- Drain fuel tank sump, water separator fuel filters if equipped
- Add fluids as required
- Inspect and clean components as required
- Housekeeping tasks

LEARNING STEP 1

Service lubrication system (greasing)

Locate lubrication points on the actual chart, including fitted centralized systems. Confirm grease type, interval, quantity and safe position. Clean fittings and use a properly loaded grease gun. The LeeBoy 8680 example includes optional systems that combine several points; do not assume every machine has them. Record service and report damaged or blocked fittings instead of forcing lubricant through an unknown obstruction.

Record the condition, not just a tick

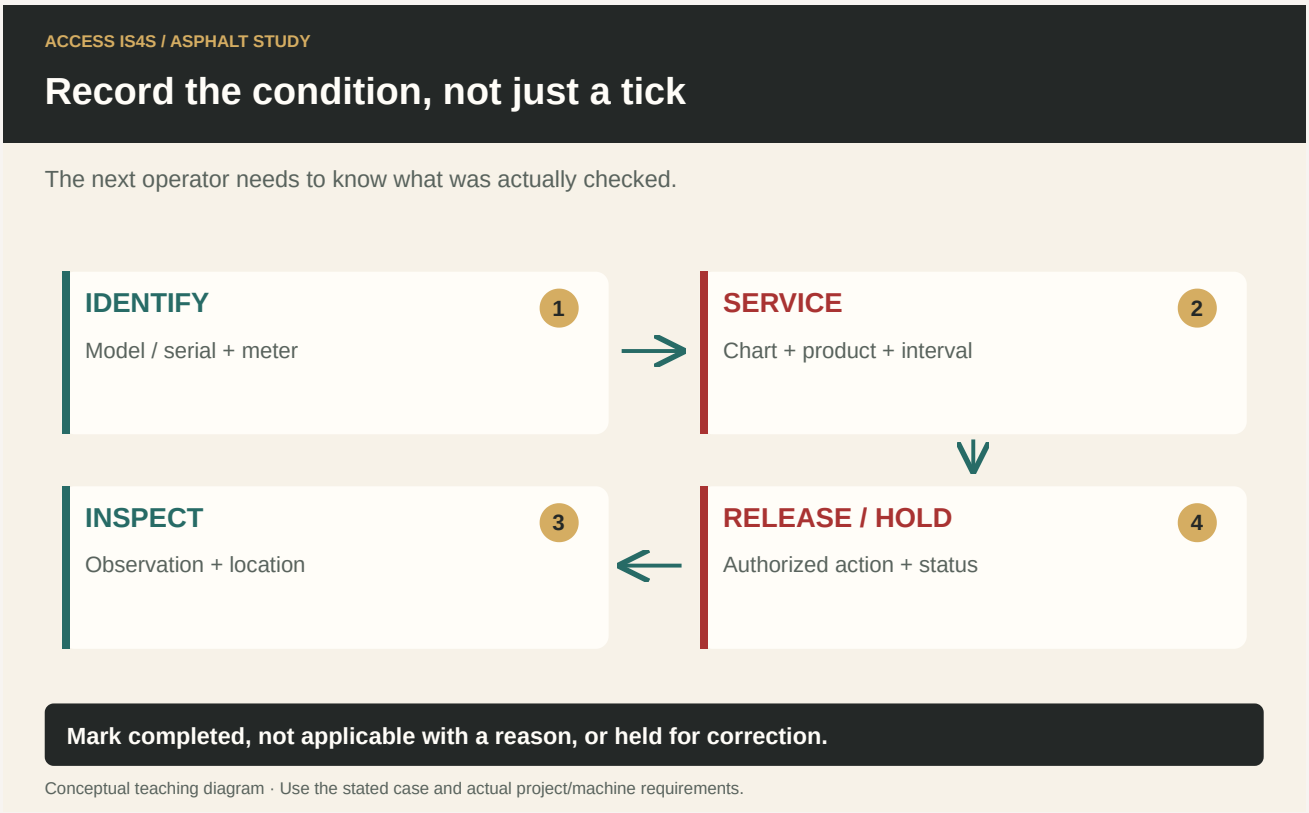

Note. ACCESS IS4S. (2026). Record the condition, not just a tick [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Service air intake system as required (air filters/pre cleaners)

Read the intake restriction indicator, inspect the pre-cleaner and check housing/seal condition. Follow the manufacturer’s cleaning/replacement policy and keep dirt out of the clean side. Some elements must be replaced rather than cleaned. Do not use compressed air unless the actual procedure permits it and specifies the method and limits.

LEARNING STEP 3

Drain fuel tank sump, water separator fuel filters if equipped

Service the fuel sump or separator only where fitted and under its prescribed conditions. Collect drainage, note water/debris and dispose of it properly. Keep ignition sources controlled. Routine separator service does not authorize opening high-pressure fuel components. Repeated contamination requires investigation.

LEARNING STEP 4

Add fluids as required

Match fluid to the labelled system and specification. Check ground level, temperature and stopped/running condition before interpreting the dipstick or sight gauge. Use the correct side of any dual-scale dipstick. Clean fill points, avoid cross-contamination and overfilling, and record unusual consumption. Coolant, hydraulic fluid, engine oil and release agent are not interchangeable.

LEARNING STEP 5

Inspect and clean components as required


Inspect radiator/oil cooler, accessible plugs, dipsticks, battery condition and hoses using safe access and isolation. Protect cooling fins and electrical parts during cleaning. Never open a hot pressurized system or touch a suspected hydraulic leak. Restore guards and refer repairs to authorized personnel.

LEARNING STEP 6

Housekeeping tasks

Clean hopper, conveyors, augers, screed decks, extensions, steps and commonly missed ledges using the approved procedure. Coordinate with the screed crew, control heat and ignition sources, and prevent contact with moving systems. Use a compatible release/cleaning product with its SDS and containment requirements. “Biodegradable” does not mean harmless or permitted to drain onto the ground. Collect waste, account for tools and document the final condition.

Inside the paver: the feeder system

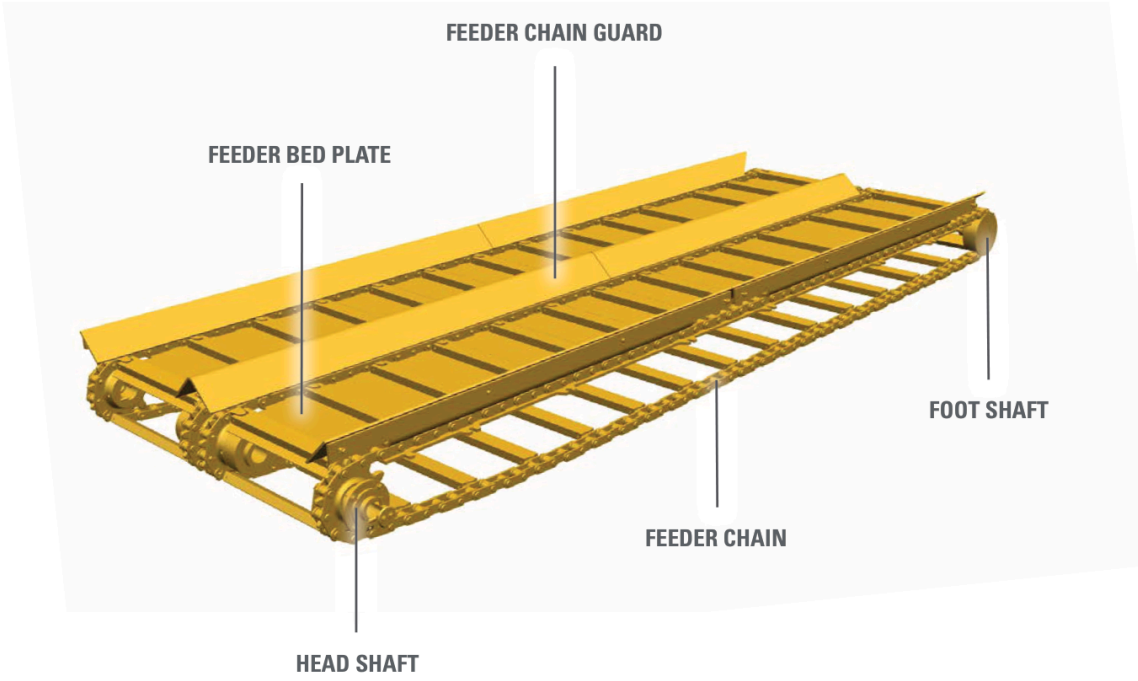

Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 11). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

Worked example · A repeated low level

Hydraulic oil is low again after yesterday’s top-up. A fresh wet area is visible beneath the machine.

Think it through.

Record the repeated loss and safe visual observation, secure/hold the machine as required and notify the responsible person. Do not treat repeated top-up as a repair or touch the suspected leak. Confirm authorized correction before release.

Try it and explain your thinking

A fictional service interval is 10 operating hours

A fictional service interval is 10 operating hours. Last service 1,420 h; current 1,429.5 h. How much remains?

Skills you use: Numeracy, Reading.

Explain why an unlabelled spray bottle cannot be accepted as a release agent.

Explain why an unlabelled spray bottle cannot be accepted as a release agent.

Skills you use: Problem solving, Communication.

Create a digital maintenance record without claiming checks you did not perform.

Create a digital maintenance record without claiming checks you did not perform.

Skills you use: Digital, Writing, Collaboration.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

The outline specifies a minimum 80% checklist result for this task. Score the 3 task criteria out of 6; require at least 5 points and all critical items passed. This local scoring rubric operationalizes the checklist; it is not a separate certification. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____

What the observer checks	Result	Evidence
Service lubrication/intake/separator according to the actual schedule.	0 / 1 / 2	Evidence/help: _____
Check correct fluids and accessible cooling/battery components safely.	0 / 1 / 2	Evidence/help: _____
Clean feed and access areas with containment and restore guards.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I5, printed p. 74; source PDF pp. 76–77.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 10: De-energization and Lockout. Open publication.
- Lincoln Industrial. (December 2013; Form 404636). Lever Gun Models 1142, 1147 and 1151: Installation and Maintenance Guide. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline I6

Markers, grades and stakes

A paver operator uses survey information to maintain the approved line and geometry. The marks must be interpreted before they become machine instructions.


- Abbreviations used on stakes
- Interpret stakes
- Fundamentals of paver operation

LEARNING STEP 1

Abbreviations used on stakes

Read common abbreviations with the project legend: BM benchmark; C cut; CB catch basin; SMH sanitary manhole; EL elevation; FG finished grade; PL property line; RW right of way; SAN/S sanitary; Mon monument; G gas; PVC polyvinyl chloride. A label identifies a feature or value, not necessarily its complete location or safe clearance. Keep units and datum with every elevation.

Read the mark, the offset and the datum

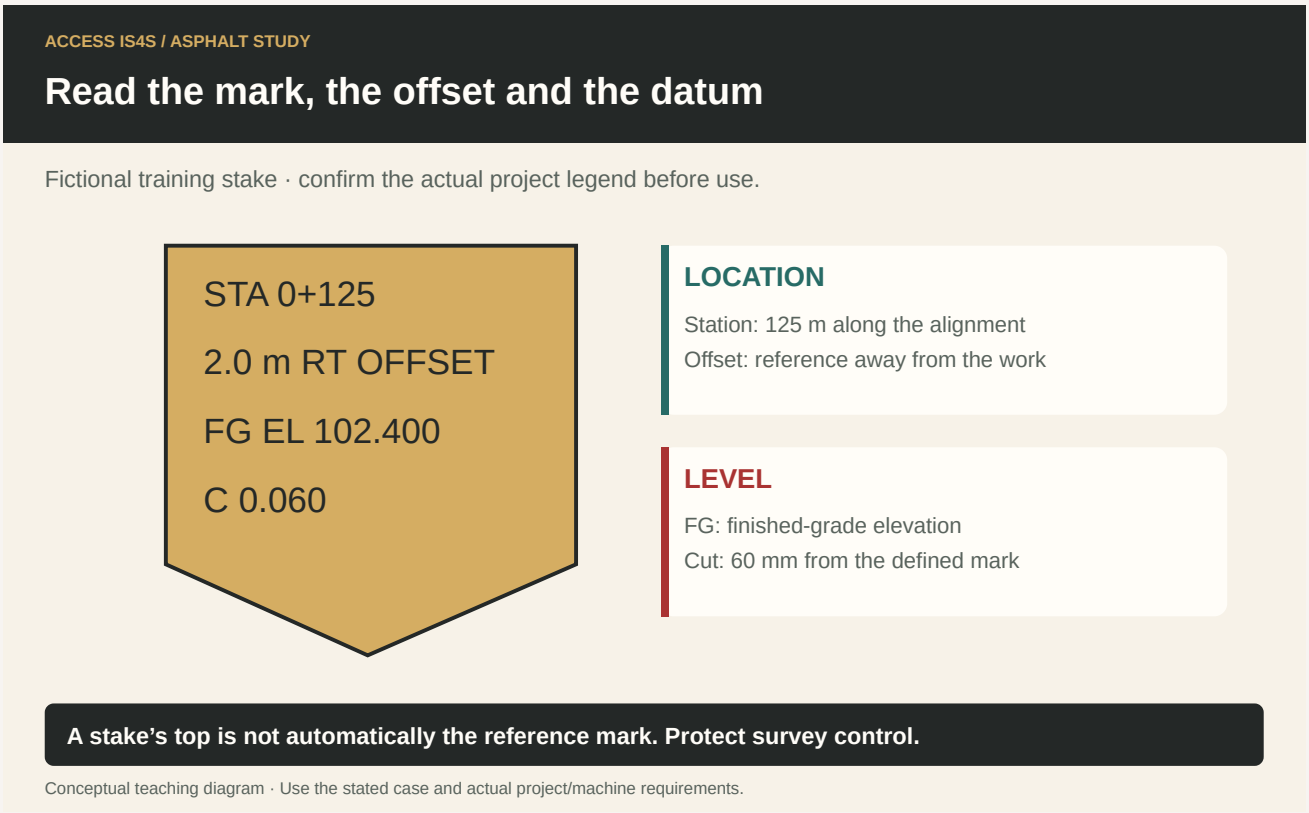

Note. ACCESS IS4S. (2026). Read the mark, the offset and the datum [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Interpret stakes


Identify station, side, offset, reference mark, cut/fill, slope and target work. Preserve property pins, benchmarks and protected monuments. Distinguish an assumed local datum from geodetic control. Cross-heads and offset stakes transfer information away from the work area; they are not automatically the paving edge. If a mark is moved or conflicts with the current drawing, stop using it and request verification.

LEARNING STEP 3

Fundamentals of paver operation

Follow a verified line with a stable sighting reference and smooth steering. Look sufficiently ahead while maintaining awareness of trucks, crew and obstacles. Guide trucks into the planned straight approach rather than forcing the paver out of alignment to receive them. Experience improves precision through feedback, not by ignoring measured checks. Coordinate alignment with the screed operator's width and grade controls.

Identify grade and slope sensors

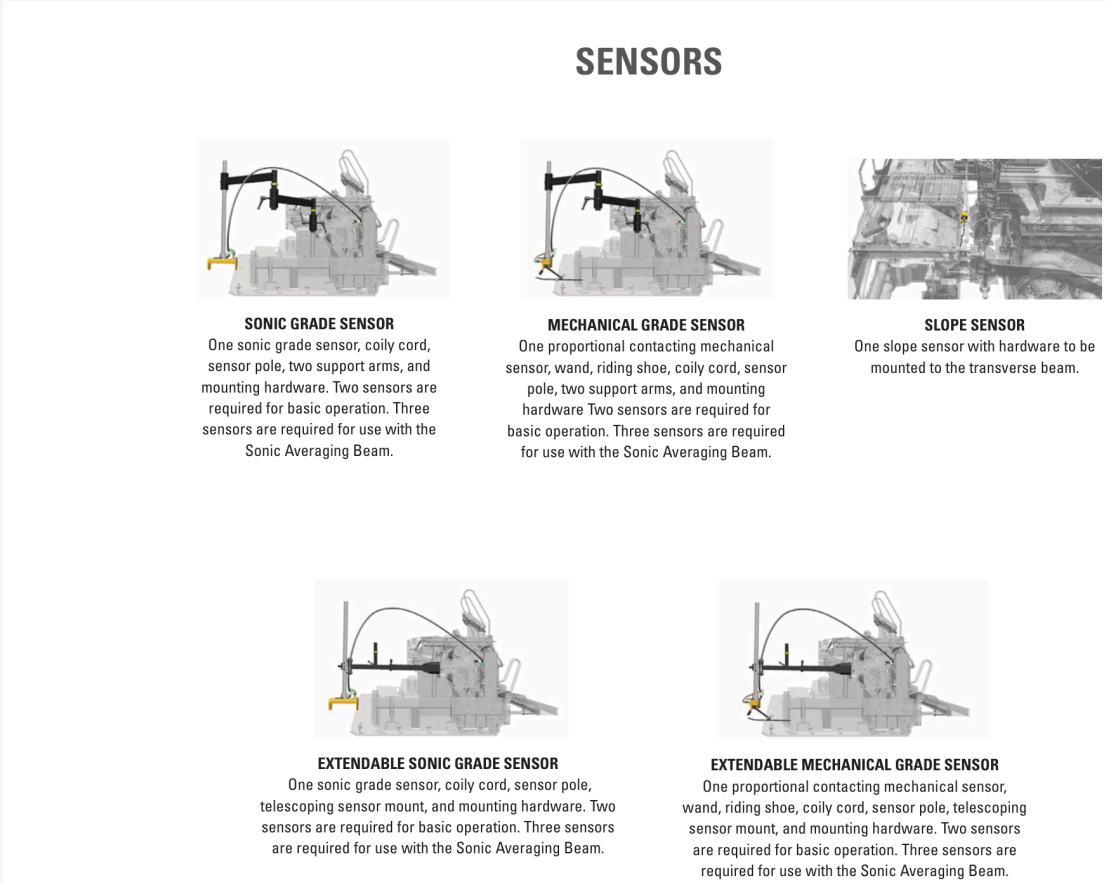

Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 34). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

Worked example · Offset versus edge

A stake marked 1.5 m RT OFFSET describes the approved right paving edge at station 0+060. A learner treats the stake itself as the edge.

Think it through.

Use the project legend and stated offset direction to locate the actual edge; the stake is a reference away from it. Verify the relation with the grade lead before setting the paver line. Do not shift the whole mat to the stake.

Try it and explain your thinking

At one verified point, base EL is 101.250 m and finished EL is 101.300 m

At one verified point, base EL is 101.250 m and finished EL is 101.300 m. Find the vertical difference.

Skills you use: Numeracy, Problem solving.

Write a read-back containing station, side, offset and unresolved datum.

Write a read-back containing station, side, offset and unresolved datum.

Skills you use: Writing, Communication.

Communicate and verify the work

Use an AI to explain the abbreviation list, then identify what it cannot establish from the list alone.

Skills you use: Digital, Reading, Adaptability.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____

What the observer checks	Result	Evidence
Interpret and protect the actual control marks.	0 / 1 / 2	Evidence/help: _____
Transfer line/elevation information correctly.	0 / 1 / 2	Evidence/help: _____
Maintain smooth alignment while coordinating truck and screed roles.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I6, printed p. 76; source PDF pp. 78–79.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 8: Hot Mix Asphalt Paving; source PDF pp. 391–446. Open publication.
- Leica Geosystems. (n.d.). Leica NA700 Series Automatic Levels: Technical Data. Open publication.
- BC Ministry of Transportation and Transit. (2025). 2025 Standard Specifications for Highway Construction, Volume 1. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline I7

Operate asphalt paver

Paver operation is learned through observed, supervised control of the actual machine. In-school practical work in the outline is on flat surfaces; workplace performance adds the approved grades, slopes and conditions under competent supervision.


- Standard moves
- Maneuvering the paver
- Position paver
- Simulate paving laying down a mat using 5mm crush and sand mixture or similar compact quality material or asphalt

LEARNING STEP 1

Standard moves

Complete pre-start checks and daily maintenance, identify controls and warnings, and enter using the designated access and three-point contact. Follow the OMM start and travel sequence. Practise forward–stop–reverse–stop on the cleared flat training area, checking surroundings before each movement. Apply the specified parking and transmission controls. Transmission neutral or a control lock is not a substitute for maintenance lockout.

Coordinate the whole paving train

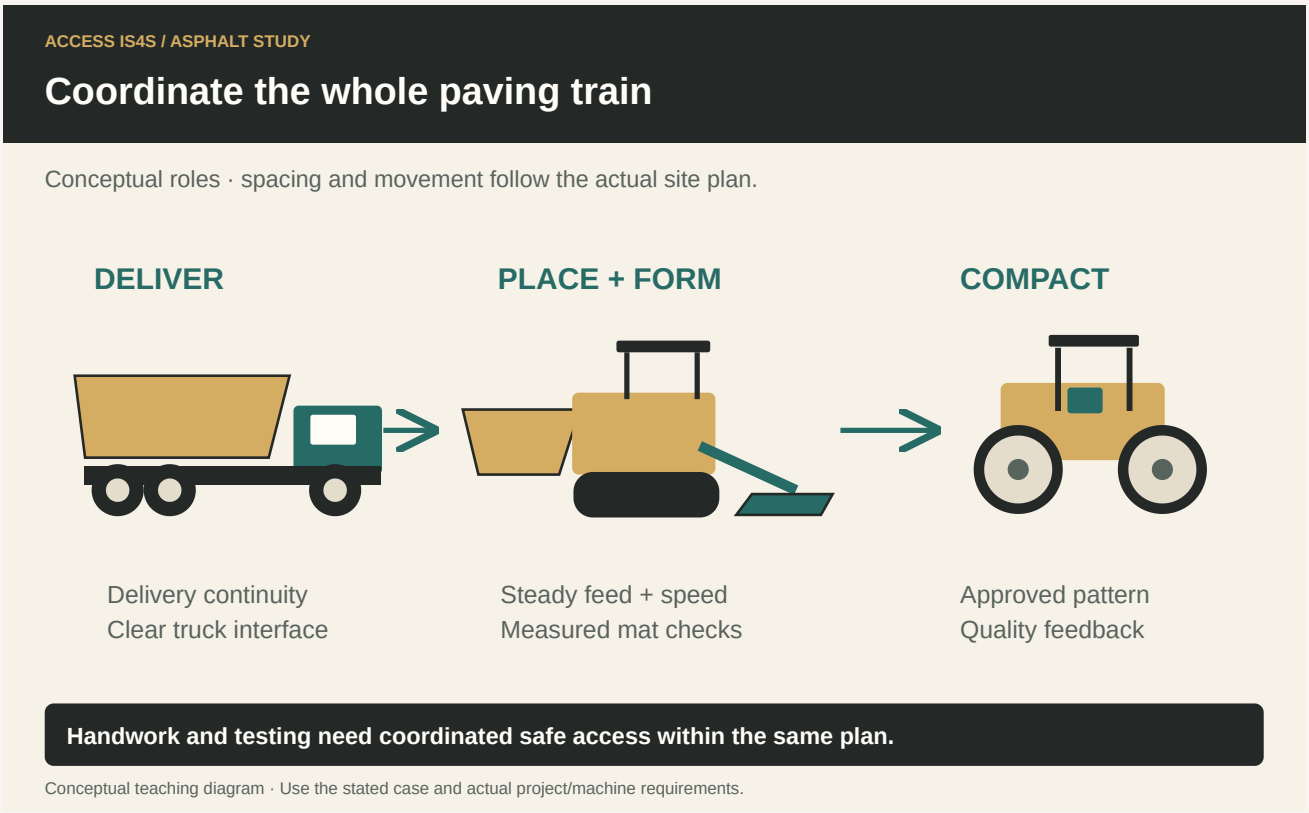

Note. ACCESS IS4S. (2026). Coordinate the whole paving train [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Maneuvering the paver

Manoeuvre smoothly within the machine's operating limits and the instructor's plan. Maintain awareness of space, position, clearance and ground support. In-school learners stay on the approved flat area. Hills, slopes and varied conditions require a separate workplace plan, machine limits and supervised assessment; do not infer a safe slope from a generic diagram. Stop when visibility or support is uncertain.

LEARNING STEP 3

Position paver


Position the paver for different starting scenarios, confirming line, width, joint, truck approach and screed readiness. Coordinate hopper opening/closing, material-flow settings and truck guidance through the actual controls and agreed signals. Observe the whole movement envelope. The instructor sets time and quantity appropriate to conditions; speed is not rewarded at the expense of control.

LEARNING STEP 4

Simulate paving laying down a mat using 5mm crush and sand mixture or similar compact quality material or asphalt

For a simulated mat, use only an instructor- and manufacturer-approved training material and method; a sand/crushed-material exercise does not reproduce every hot-mix behaviour. For asphalt, follow the approved mixture, temperature, placement and rolling plan. Maintain the line and steady process, communicate with screed and ground crew, monitor performance, and clean/shut down using the safe procedure. Record classroom and workplace observations separately.

Paver contact with the ground

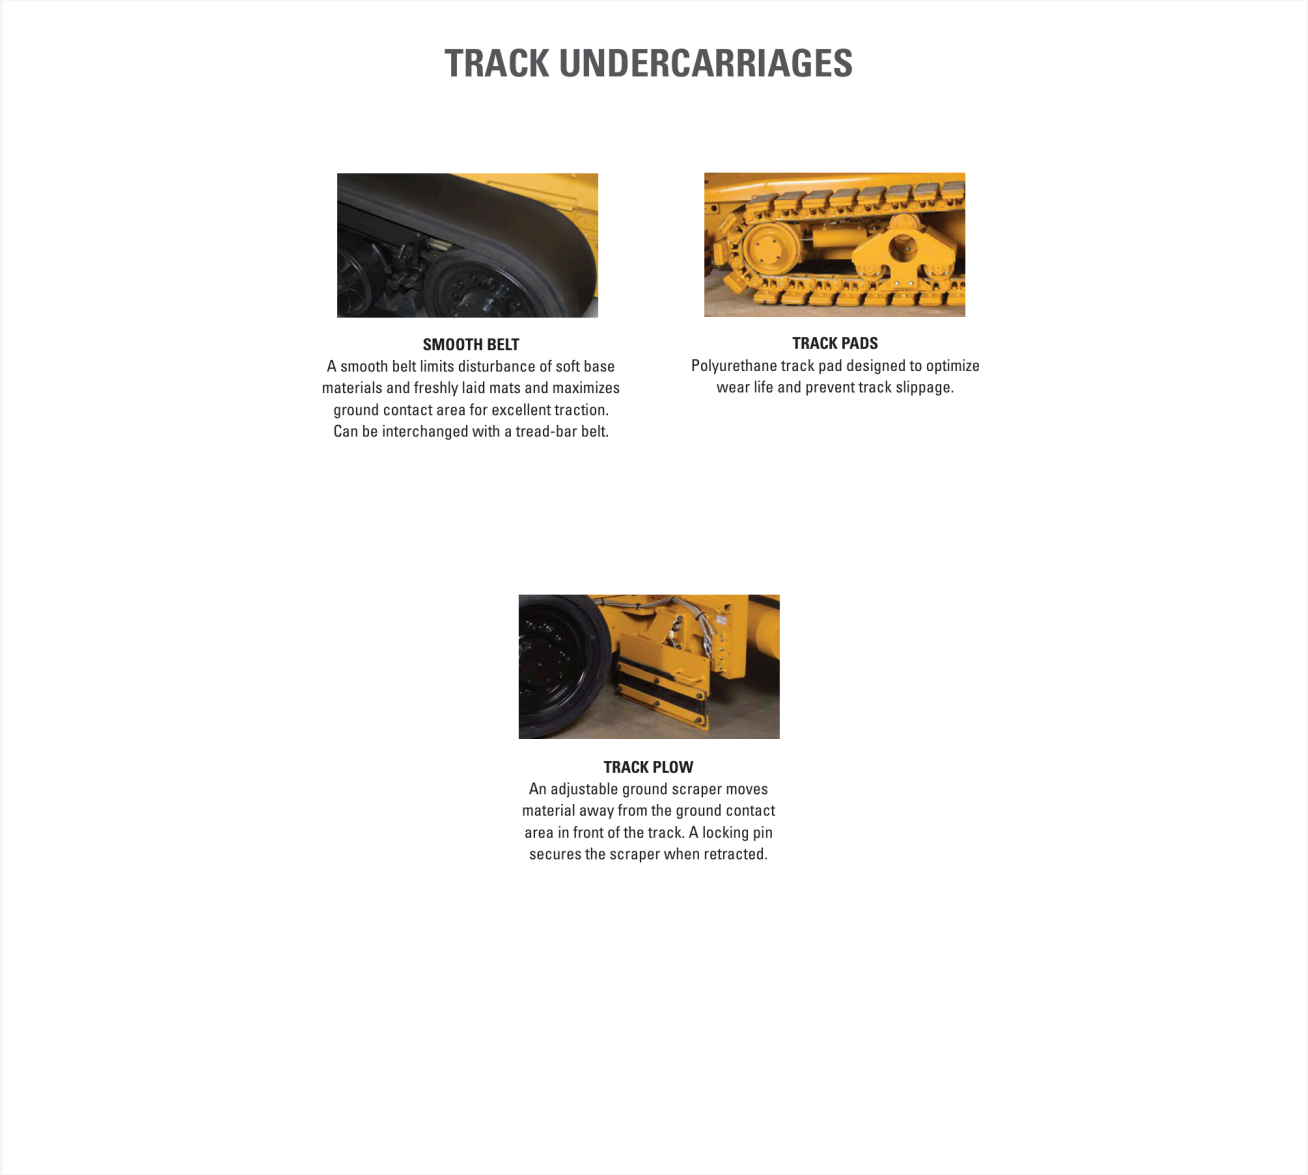

Note. Caterpillar. (2024). Pavers and Screeds Parts Reference Guide (QEXQ3132-02 (08/2024), source PDF p. 19). Faithful crop; original labels retained. Multiple paver/screed models and build numbers; applicability is specified in individual tables. Full source context.

Worked example · Flat practice is a specific achievement

A learner completes a controlled flat-pad pass with simulated material. The next job involves a steep access road and hot mix.

Think it through.

Record the demonstrated flat-pad skills. Plan the additional machine/site-specific preparation and supervised workplace assessment for grades, slopes and hot-mix conditions. Do not label the first exercise as proof of unrestricted operation.

Try it and explain your thinking

List five observations an instructor should record during a flat-pad pass.

List five observations an instructor should record during a flat-pad pass.

Skills you use: Writing, Reading.

A fictional 36 m practice pass takes 12 min

A fictional 36 m practice pass takes 12 min. Calculate average travel speed and one reason not to compare learners by it alone.

Skills you use: Numeracy, Problem solving.

During the pass, a partner reports a person entering the work area

During the pass, a partner reports a person entering the work area. Demonstrate the response.

Skills you use: Communication, Collaboration, Adaptability.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____
Precheck, maintain, start and monitor the actual machine.	0 / 1 / 2	Evidence/help: _____
Enter/exit safely and perform flat forward/stop/reverse/stop with correct parking controls.	0 / 1 / 2	Evidence/help: _____
Operate hopper, transmission and flow controls under supervision.	0 / 1 / 2	Evidence/help: _____
Position and guide the truck, follow the line and coordinate the screed/ground crew.	0 / 1 / 2	Evidence/help: _____
Place an approved simulated or asphalt mat, then clean and shut down.	0 / 1 / 2	Evidence/help: _____
Record additional workplace grades/slopes/conditions separately.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I7, printed p. 78; source PDF pp. 80–81.
- Caterpillar. (2016). Guide to Asphalt Paving (QEBQ1888). Asphalt paving process, tractor, screed, material delivery and handwork; model examples vary. Open publication.
- Asphalt Institute. (2007). The asphalt handbook (7th ed., MS-4), Chapter 8: Hot Mix Asphalt Paving; source PDF pp. 391–446. Open publication.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Study chapter · Outline I8

Follow shut down procedures

A controlled shutdown preserves the paver’s condition and leaves a clear handover. The process includes parking, heat and energy controls, inspection and security—not simply switching off the engine.

Shut-down procedures

LEARNING STEP 1

Shut-down procedures


Select the designated stable parking location with service access and clear public/emergency routes. Consider the possibility that the machine will not restart. Use level ground where required for the procedure and fluid checks. Coordinate completion of material handling and screed work before the final stop.

Follow the matching OMM sequence for stopping working functions, positioning the screed and attachments, parking controls, required cooling and engine shutdown. Do not transfer a cooldown time or control sequence from a different model. Use specified supports, locks and chocks. A normal shutdown does not by itself authorize maintenance access: apply the full lockout procedure when the next task requires it.

Inspect from safe access areas for leaks, damage, buildup and missing guards. Keep away from hot or pressurized systems and moving/unsupported parts. Record machine ID, meter, parking location, defects and required service. Secure keys, panels and detachable items, then communicate the final status to the responsible person and next shift.

The practical checklist uses the actual machine procedure. Safety-critical parking, support and energy-control items must all pass. The outline’s 80% checklist threshold cannot compensate for an unsafe final state. Repeat the required practice after feedback and record the new attempt separately.

Leave a known safe state for the next person

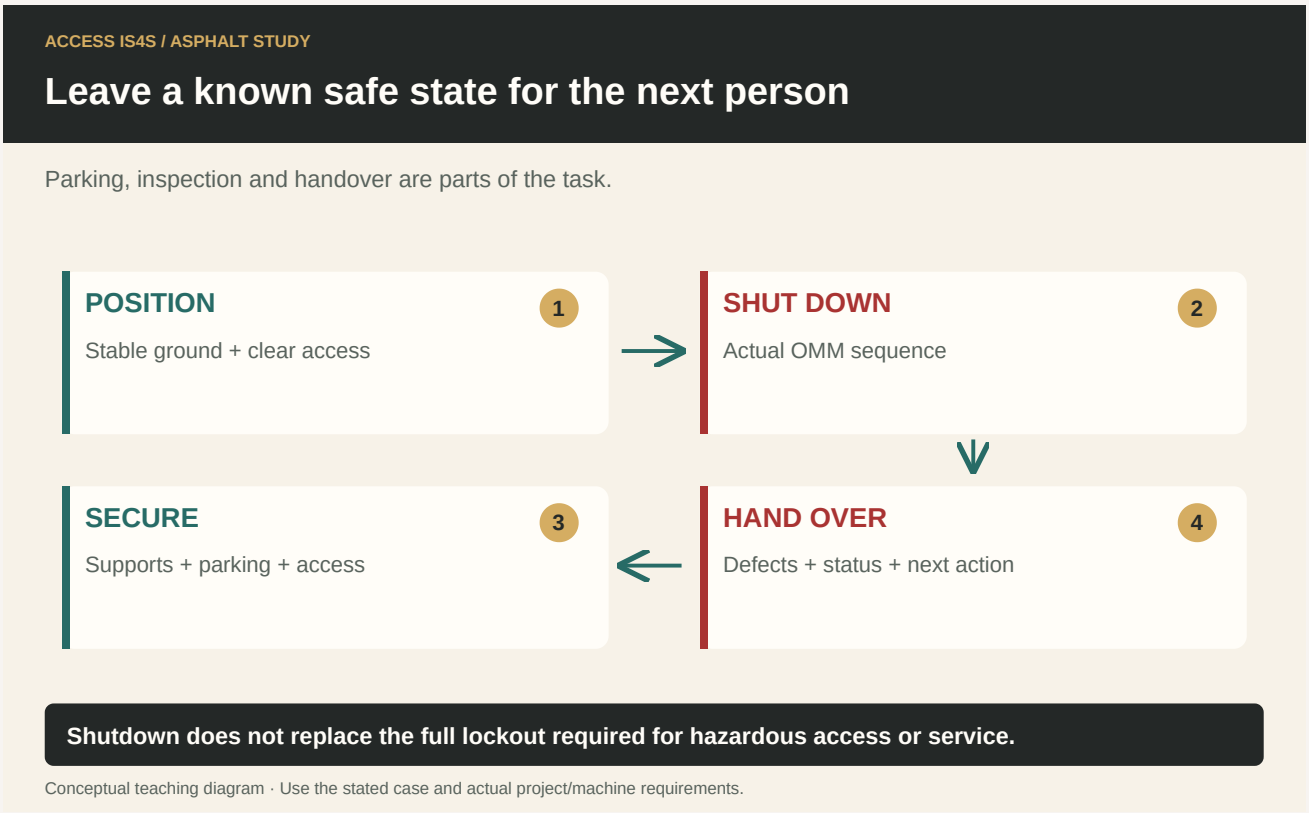

Note. ACCESS IS4S. (2026). Leave a known safe state for the next person [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LeeBoy 8680 screed locks and hopper lock valves

Screed Locks

This machine is provided with screed lock mechanisms as added safety and stability during transport. A screed lock knob is located on each side of the screed on the paver frame. **(Figure 4-1)**

- Pull the knob outward to release the screed lock.
- Push the knob in and down to lock the screed in place.

⚠CAUTION Ensure locks are in the unlocked position before raising or lowering the screed.

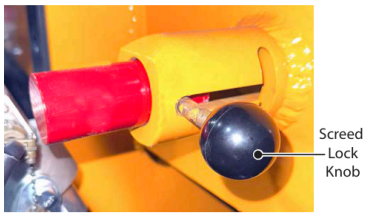


Figure 4-1. Screed Lock (Left Side Shown)

Hopper Lock Valves

The hopper cylinder valves can be used to lock the hopper wings when they are open or closed. **(Figure 4-2)** Be sure to unlock the hopper valves before operation!

- Turn the valve counterclockwise to unlock the hopper wings.
- Turn the valve clockwise to lock the hopper wings.

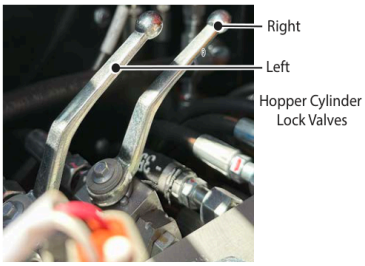


Figure 4-2. Hopper Cylinder Lock Valve

⚠CAUTION Ensure the hopper cylinder is unlocked before extending or retracting the hopper wings.

Note. LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP, p. 4-4; PDF p. 72). Serial 365152 and above. Faithful crop; use the complete matching procedure. Full source context.

Worked example · An incomplete handover

The paver is parked correctly, but the operator noticed a leak and left without recording it.

Think it through.

The shutdown/handover is incomplete. Record the leak observation, location and machine status, notify the responsible person and arrange the required hold/inspection. The next operator needs the information before starting.

Try it and explain your thinking

Explain shutdown versus lockout.

Explain shutdown versus lockout.

Skills you use: Reading, Communication.

A ten-item assessment gives 17/20 but a required screed-support check failed

A ten-item assessment gives 17/20 but a required screed-support check failed. State the result.

Skills you use: Numeracy, Problem solving.

Prepare a concise next-shift note.

Prepare a concise next-shift note.

Skills you use: Writing, Collaboration.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

The outline specifies a minimum 80% checklist result for this task. Score the 3 task criteria out of 6; require at least 5 points and all critical items passed. This local scoring rubric operationalizes the checklist; it is not a separate certification. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____

What the observer checks	Result	Evidence
Choose and secure the approved parking location.	0 / 1 / 2	Evidence/help: _____
Complete model-specific shutdown and component support.	0 / 1 / 2	Evidence/help: _____
Inspect safely and hand over defects and status.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I8, printed p. 80; source PDF pp. 82–82.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 10: De-energization and Lockout. Open publication.
- WorkSafeBC. (Web snapshot: October 30, 2026). OHS Regulation, Part 16: Mobile Equipment. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.