Study chapter · Outline I9

Transport paver

Moving a paver between sites requires a verified transport configuration and a coordinated loading plan. The fitted screed and attachments can change width, mass and securement requirements.


- Compliance with wide load regulations
- Roles and responsibilities
- Prepare machine for transport
- Loading and unloading procedures

LEARNING STEP 1

Compliance with wide load regulations

Measure actual transport dimensions and confirm the load, route and applicable BC commercial transport requirements. Signs, lighting, permits, pilot cars and travel restrictions depend on the actual movement; they are not triggered by a single classroom rule. Removing extensions may change width but requires the approved handling and securement method. The carrier confirms the current requirements before departure.

Loading needs a shared plan

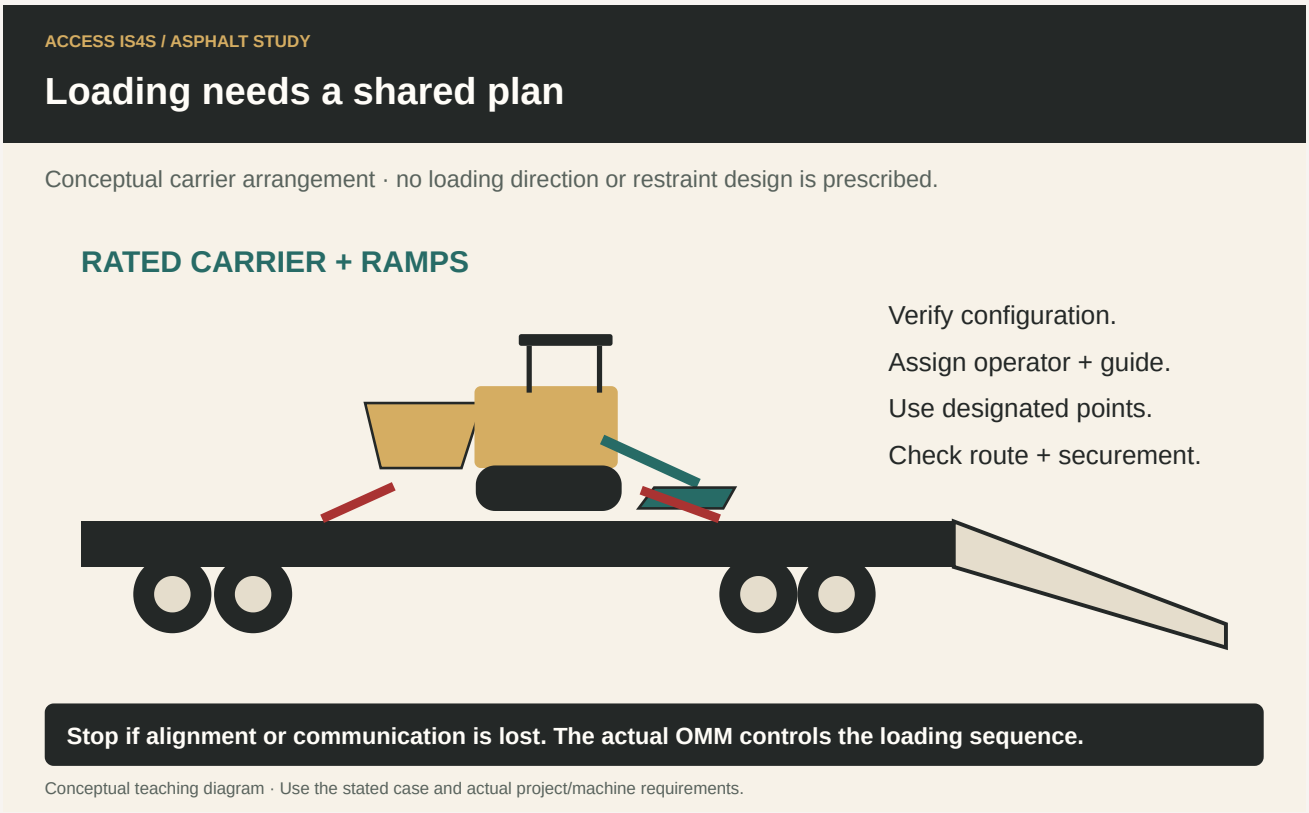

Note. ACCESS IS4S. (2026). Loading needs a shared plan [Original instructional SVG]. Conceptual explanation based on the cited chapter readings; geometry and operating arrangements are illustrative, not prescribed settings.

LEARNING STEP 2

Roles and responsibilities

Assign a competent machine operator, carrier/driver and ground guide as required. The driver/carrier manages transport compliance and securement within their responsibility; the designated operator follows the machine loading procedure. Do not assume the paver operator is always included or excluded. Everyone must know the stop signal, communication method and final release responsibility.

LEARNING STEP 3

Prepare machine for transport

Follow the OMM transport configuration for screed, extensions, augers, cut-offs, guards and loose equipment. Use approved lifting/rigging for removed components and designated tie-down points. The LeeBoy 8680 example gives specific preparation and loading instructions in printed pages 4-64–4-65; those instructions apply to the stated model/serial scope, not every paver. Read the complete procedure before a practical demonstration.

LEARNING STEP 4

Loading and unloading procedures

Check carrier/ramp capacity, alignment, support, traction and the clear movement envelope. Use the specified loading direction and controlled speed, with a guide positioned safely. Stop if alignment or communication is lost. After loading, position/support the machine, apply required parking controls and secure using rated components and the applicable National Safety Code Standard 10/BC requirements. Control the machine before releasing restraints for unloading. A time target never justifies rushing a critical step.

LeeBoy 8680 loading arrangement

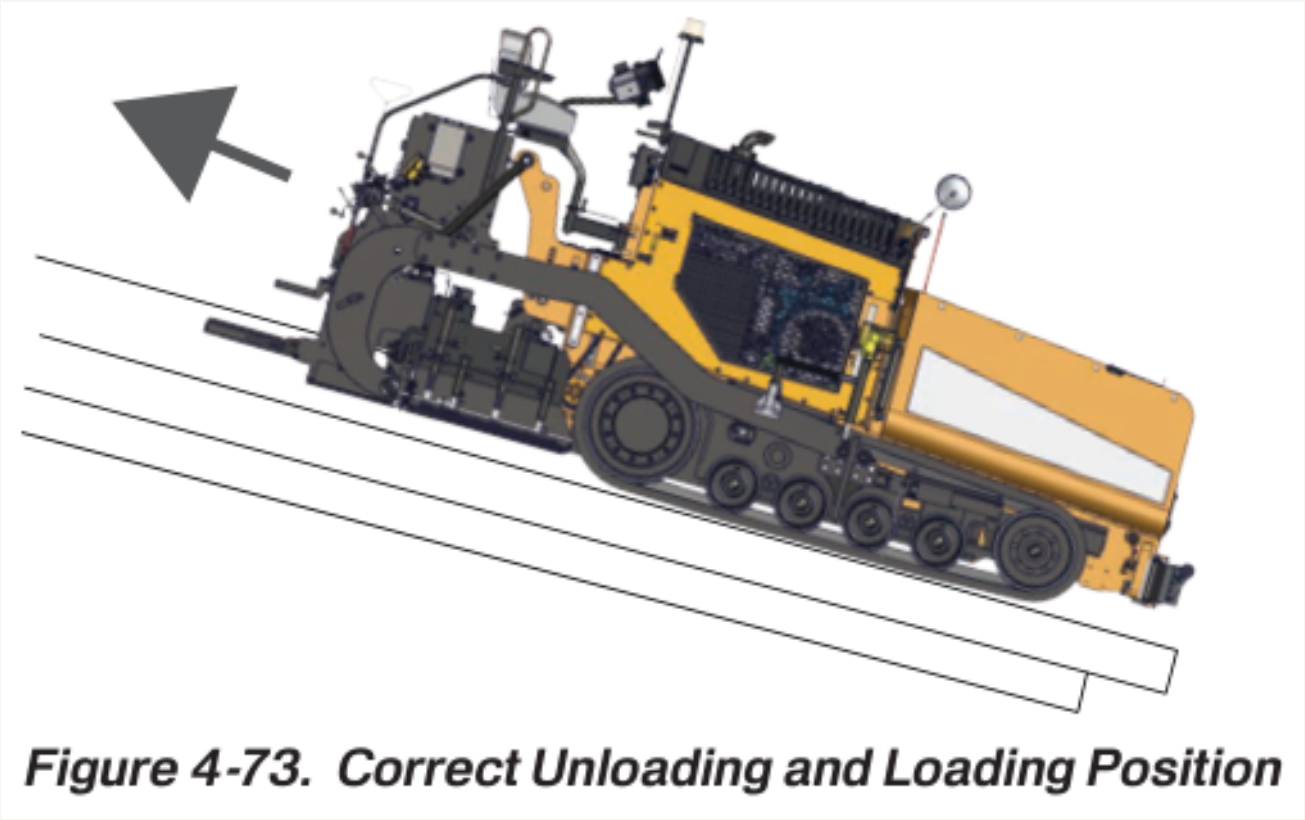


Figure 4-73. Correct Unloading and Loading Position

Note. LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP, p. 4-64; PDF p. 132). Serial 365152 and above. Faithful crop; use the complete matching procedure. Full source context.

Worked example · Width changes with configuration

A fictional machine measures 2.50 m with transport equipment retracted and 3.10 m with a fitted extension assembly.

Think it through.

The actual configured width differs by 0.60 m. Verify the required transport configuration and current route/permit conditions with the carrier. The smaller dimension cannot be used on paperwork while the larger configuration remains fitted.

Try it and explain your thinking

Name four checks before the machine touches the ramp.

Name four checks before the machine touches the ramp.

Skills you use: Reading, Problem solving.

A base machine is 8,600 kg and fitted items add 740 kg

A base machine is 8,600 kg and fitted items add 740 kg. Find the load before separate cargo.

Skills you use: Numeracy.

Write a handover when loading is delayed by an unidentified tie-down point.

Write a handover when loading is delayed by an unidentified tie-down point.

Skills you use: Writing, Communication, Collaboration, Adaptability.

Show the skill in supervised practice

Machine/model/serial or classroom case: _____ · Manual/procedure and revision: _____ · Date/location: _____ · Learner/observer: _____

Record each criterion as 0—not yet demonstrated, 1—with task-solving support, or 2—independently under the stated conditions. Mark unobserved criteria separately; do not convert missing opportunity into a zero. The assessor determines the required repeat practice and applicable qualification requirements. A critical failure means hold, correction and reassessment regardless of the numerical result. Use safe simulations for classroom reasoning; actual operation requires the selected equipment, approved conditions and competent supervision.

What the observer checks	Result	Evidence
Critical: Safe access, surroundings and communication maintained.	Pass / hold	Observation: _____
Critical: Required energy, heat, movement and public-access controls maintained for the actual task.	Pass / hold	Observation: _____

What the observer checks	Result	Evidence
Verify dimensions, transport rules and assigned roles.	0 / 1 / 2	Evidence/help: _____
Prepare screed/attachments to the actual OMM.	0 / 1 / 2	Evidence/help: _____
Demonstrate controlled loading preparation and rated securement checks.	0 / 1 / 2	Evidence/help: _____

Actual conditions and support: _____

Feedback, next practice and authorized release/status: _____

Sources and further reading

- SkilledTradesBC. (2016). *Asphalt Paving/Laydown Technician program outline*, I9, printed p. 81; source PDF pp. 83–83.
- Canadian Council of Motor Transport Administrators. (June 2013). National Safety Code Standard 10: Cargo Securement. Open publication.
- Canadian Council of Motor Transport Administrators. (May 2016). Cargo Securement Standard: Interpretations and Guidance. Open publication.
- Province of British Columbia. (Web snapshot: October 30, 2026). Cargo Securement. Open publication.
- Caterpillar. (Various editions). Paving, compaction, milling and machine publications; identify the applicable document/model. Open publication.
- LeeBoy. (2026). 8680 Commercial Paver: Safety and operations manual (1033428-SOP). Serial 365152 and above. Components pp. 3-1–3-32; operation pp. 4-1–4-68; maintenance section 5. Open publication.

Figure-specific pages, editions and original contributors are credited beside each image. Current project requirements and the matching machine instructions determine practical use.

Integrated practice · all nine Skills for Success

Keep delivery and mat records consistent

> This is a complete fictional classroom case. It does not describe an actual community, Nation, employer or project. Learners may use the supplied case without disclosing personal or cultural knowledge.

A fictional approved area is 50 m × 3.2 m with a 45 mm compacted target. A verified trial relationship is loose/compacted = 1.24 for this exercise. The delivery register contains ticket 81 for 12 t and ticket 82 for 11 t, but a draft totals 35 t by counting ticket 81 twice. No density for estimating required mass is supplied.

Reading · Check the facts

Identify the controlling facts, missing information and one unsupported statement in the brief.

Writing · Make the handover useful

Draft a concise handover with location, quantities, status and the next responsible action.

Numeracy · Calculate and check

Show the case calculation with units and an independent reasonableness check.

Digital · Direct AI and verify the files

Use an available AI assistant to draft a findings table and editable record from this brief. Request DOCX or a structured document, XLSX with formulas where useful, and a PDF/HTML reading copy. Audit every claim and reopen the actual outputs.

Problem solving · Investigate the discrepancy

Explain the discrepancy, what evidence is needed and who should authorize the next step.

Communication · Send and check the message

Brief a partner, ask for a check-back and repair one misunderstanding if it occurs.

Collaboration · Review together

Agree reviewer/author roles, complete a review and record each person’s contribution.

Adaptability · Respond to the change

Apply the change card, identify what changes and what stays, and revise the record.

Creativity and innovation · Make understanding easier

Create a labelled SVG, annotated plan, short audio explanation or captioned storyboard that makes the issue easier to understand. Test it with a reader/listener and improve one useful detail.

Change card · Use after the first attempt

The coordinator asks for an audio handover as well as an editable table and PDF.

Individual evidence record

Keep the brief, calculation, saved work, review findings and revision. Record each person's actual contribution and support. Use Not observed, Not yet demonstrated, Demonstrated with support, or Demonstrated independently for the stated action; these are local feedback descriptions.

For AI/media work, a transcript, script or storyboard is distinct from a generated audio/video file. Name what was actually produced and inspected. Do not upload private records or community-held material without the relevant authority.