

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. OFFSET SHOWN MAY VARY WHERE NOTED ON THE PLANS.
4. EXCAVATED MATERIAL SHALL BE USED AS BACKFILL WHERE IT CONSISTS OF CLEAN WELL GRADED GRANULAR SOIL HAVING A MAXIMUM FINES CONTENT OF 8% (SILT AND CLAY SIZE PARTICLES) AND A MAXIMUM AGGREGATE SIZE OF 100mm.
5. WHERE EXCAVATED MATERIAL IS UNACCEPTABLE OR EXTRA FILL IS REQUIRED AROUND POLE BASE & JUNCTION BOXES, USE 25mm WELL GRADED BASE COURSE AGGREGATE.
6. BACKFILL MATERIAL SHALL BE INSTALLED AND FULLY COMPACTED IN ACCORDANCE WITH SUBSECTION 635.07.01 FOR THE MINIMUM AREA ALL AROUND THE BASE AS SHOWN ABOVE.

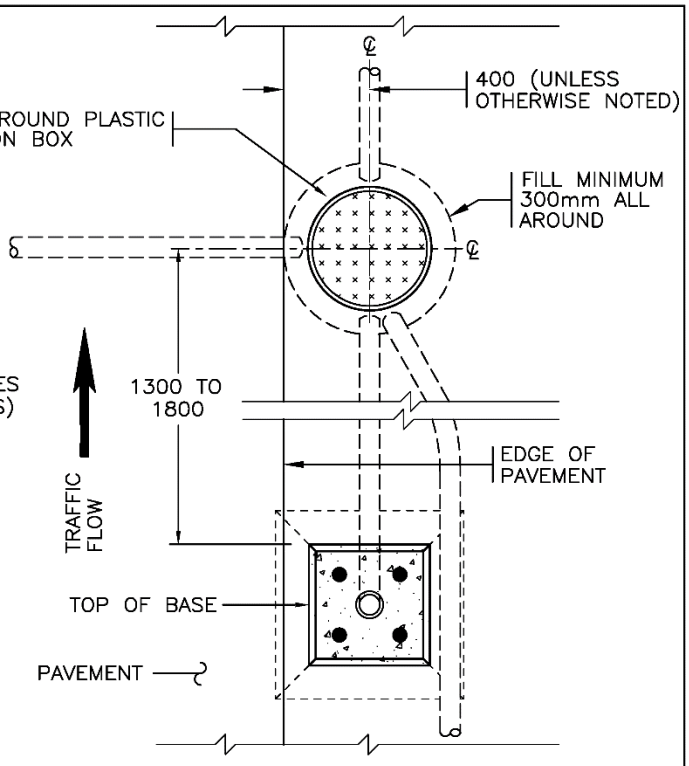


PLAN

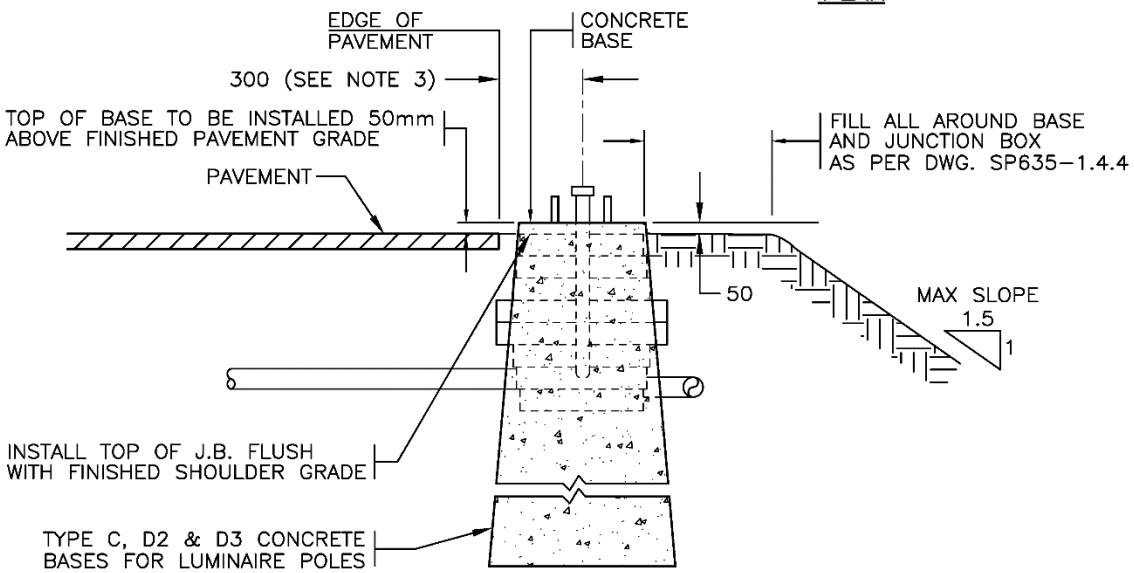


ELEVATION

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | NOTES 4, 5 & 6 REVISED | OCT 97 |
| C | REVISED TO SUIT ONLY LUMINAIRE POLE BASES | AUG 96 |
| B | BACKFILL REVISED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

# LUMINAIRE POLE BASE AND JUNCTION BOX INSTALLATION DETAIL FOR STANDARD ROADWAY

Date Approved

**30/09/93 E.L.** **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635-1.4.1

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. OFFSET SHOWN MAY VARY WHERE NOTED ON THE PLANS.
4. EXCAVATED MATERIAL SHALL BE USED AS BACKFILL WHERE IT CONSISTS OF CLEAN WELL GRADED GRANULAR SOIL HAVING A MAXIMUM FINES CONTENT OF 8% (SILT AND CLAY SIZE PARTICLES) AND A MAXIMUM AGGREGATE SIZE OF 100mm.
5. WHERE EXCAVATED MATERIAL IS UNACCEPTABLE OR EXTRA FILL IS REQUIRED AROUND POLE BASE & JUNCTION BOXES, USE 25mm WELL GRADED BASE COURSE AGGREGATE.
6. BACKFILL MATERIAL SHALL BE INSTALLED AND FULLY COMPACTED IN ACCORDANCE WITH SUBSECTION 635.07.01 FOR THE MINIMUM AREA ALL AROUND THE BASE AS SHOWN ABOVE.

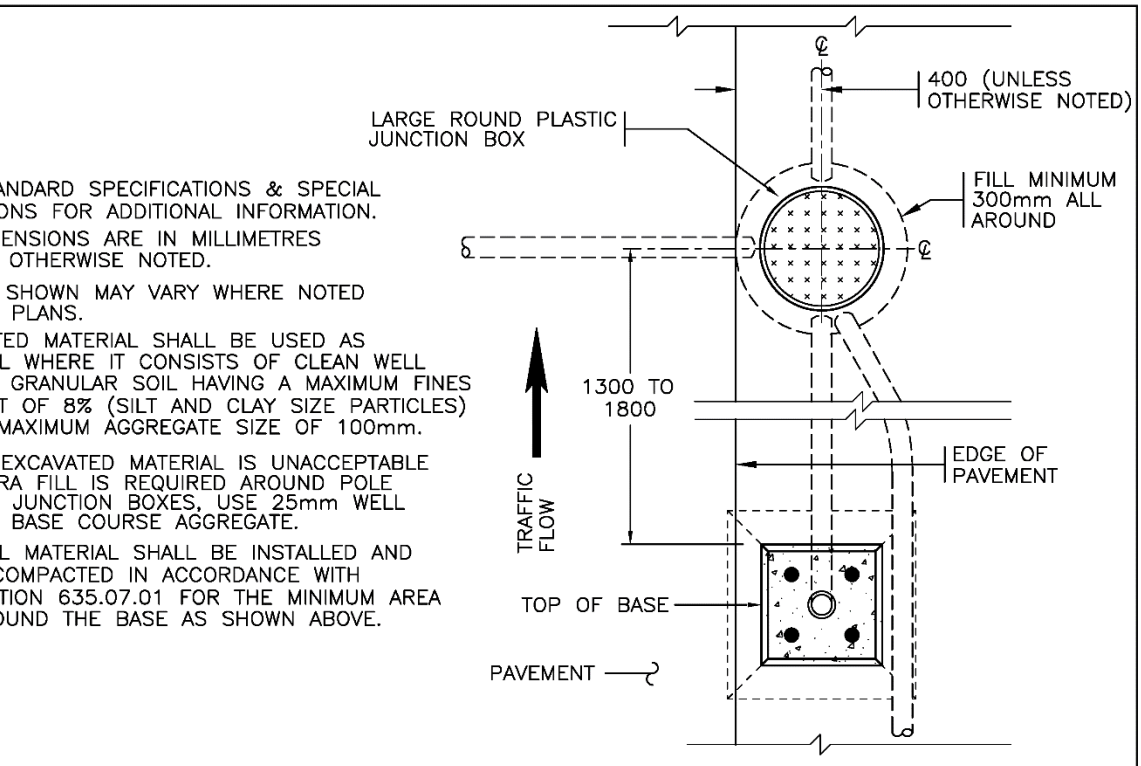


PLAN

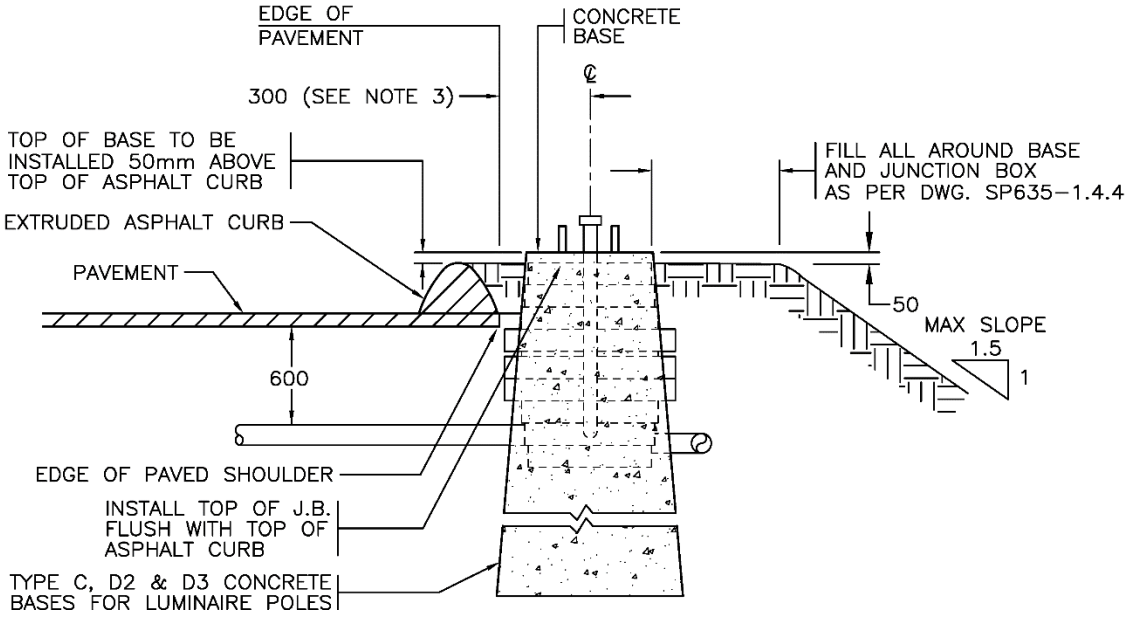


ELEVATION

NOT TO SCALE

Ministry of Transportation and Infrastructure
BRITISH COLUMBIA

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | NOTES 4, 5 & 6 REVISED | OCT 97 |
| C | REVISED TO SUIT ONLY LUMINAIRE POLE BASES | AUG 96 |
| B | BACKFILL REVISED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

# LUMINAIRE POLE BASE AND JUNCTION BOX INSTALLATION DETAIL FOR ASPHALT CURB

Date Approved

**30/09/93 E.L. (Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635-1.4.2

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. OFFSET SHOWN MAY VARY WHERE NOTED ON THE PLANS.
4. EXCAVATED MATERIAL SHALL BE USED AS BACKFILL WHERE IT CONSISTS OF CLEAN WELL GRADED GRANULAR SOIL HAVING A MAXIMUM FINES CONTENT OF 8% (SILT AND CLAY SIZE PARTICLES) AND A MAXIMUM AGGREGATE SIZE OF 100mm.
5. WHERE EXCAVATED MATERIAL IS UNACCEPTABLE OR EXTRA FILL IS REQUIRED AROUND POLE BASE & JUNCTION BOXES, USE 25mm WELL GRADED BASE COURSE AGGREGATE.
6. BACKFILL MATERIAL SHALL BE INSTALLED AND FULLY COMPACTED IN ACCORDANCE WITH SUBSECTION 635.07.01 FOR THE MINIMUM AREA ALL AROUND THE BASE AS SHOWN ABOVE.

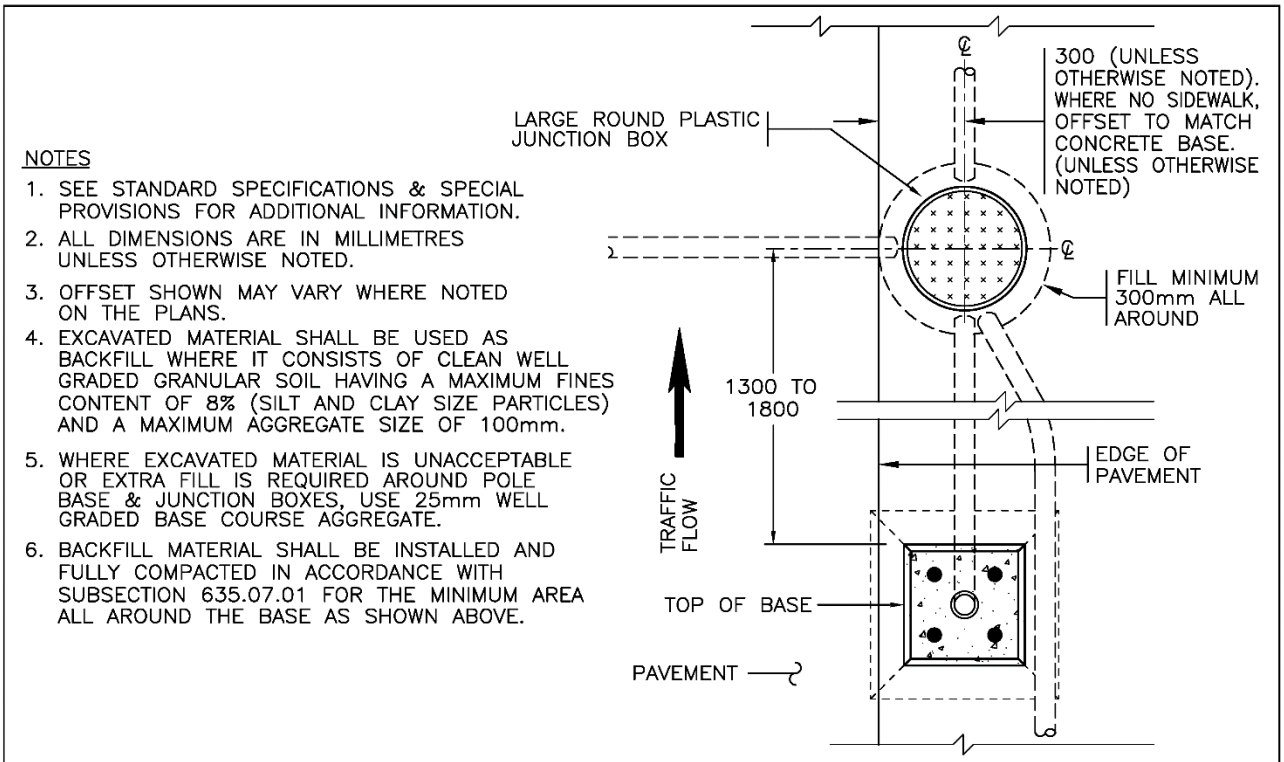


PLAN

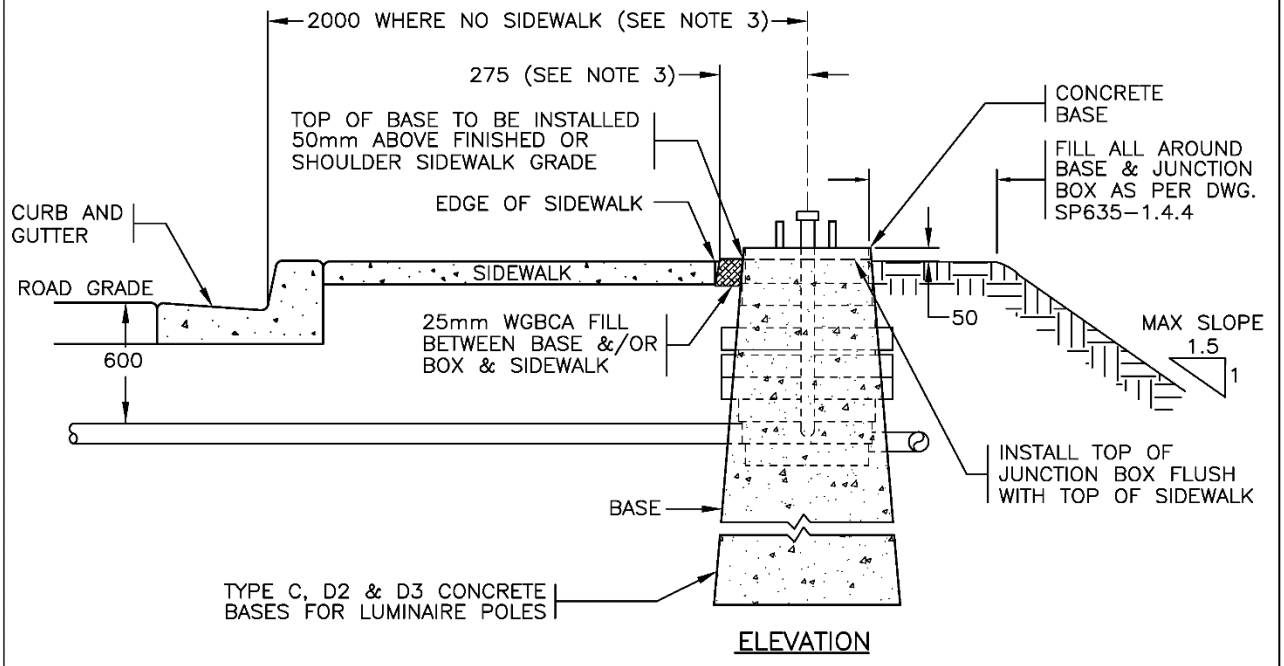


ELEVATION

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | NOTES 4, 5 & 6 REVISED | OCT 97 |
| C | REVISED TO SUIT ONLY LUMINAIRE POLE BASES | AUG 96 |
| B | BACKFILL REVISED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

# LUMINAIRE POLE BASE AND JUNCTION BOX INSTALLATION DETAIL FOR SIDEWALK

Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer


SPECIFICATION DRAWING No.

SP635-1.4.3

| BASE TYPES | A MIN. FILL |
|---|---|
| TYPES A, B AND C CONCRETE BASES (SEE SP635–1.1.2 & 1.1.3 FOR DETAILS AND POLE TYPES) | 300 |

| BASE TYPES* | A MIN. FILL |
|---|---|
| TYPES D2, D3, E2 AND E3 CONCRETE BASES | 3600 |
| TYPES F2, F3, L2, L3, S2 AND S3 CONCRETE BASES | 4600 |
| TYPE M2 CONCRETE BASES | 5400 |
| TYPE H2 CONCRETE BASES | 6400 |

*SEE SP635–1.1.3a TO 1.1.30 FOR DETAILS AND POLE TYPES.

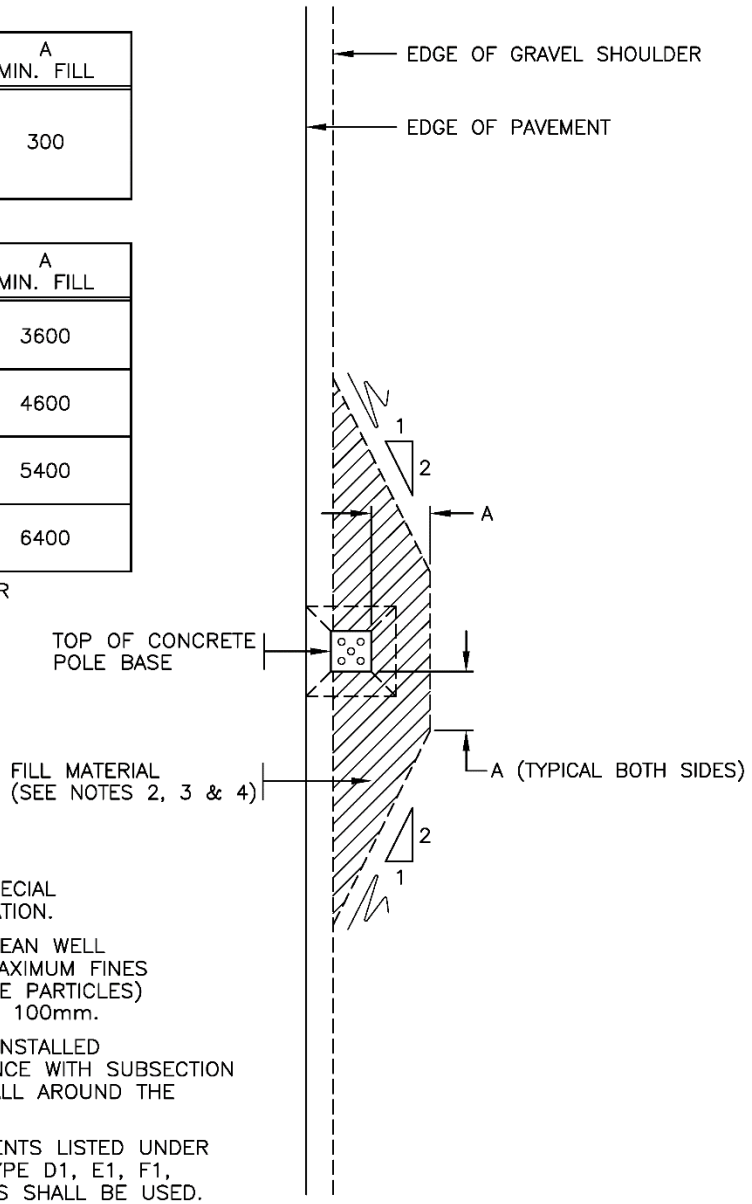


NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. FILL MATERIAL SHALL CONSIST OF CLEAN WELL GRADED GRANULAR SOIL HAVING A MAXIMUM FINES CONTENT OF 8% (SILT AND CLAY SIZE PARTICLES) AND A MAXIMUM AGGREGATE SIZE OF 100mm.
3. FILL MATERIAL SHALL BE SUPPLIED, INSTALLED AND FULLY COMPACTED IN ACCORDANCE WITH SUBSECTION 635.07.01 FOR THE MINIMUM AREA ALL AROUND THE BASE AS SHOWN ABOVE.
4. WHERE THE MINIMUM FILL REQUIREMENTS LISTED UNDER NOTES 2 AND 3 CANNOT BE MET, TYPE D1, E1, F1, L1, S1, M1 OR H1 SPREAD FOOTINGS SHALL BE USED.
5. TYPICAL OFFSETS OF TYPE C, D2 & D3 LUMINAIRE POLE BASES ARE SHOWN ON DRAWINGS SP635–1.4.1 TO 1.4.3 OFFSETS OF TYPE A, B, E2, E3, F2, F3, L2, L3, S2, S3, M2 & H2 SIGNAL & SIGN POLE BASES SHALL BE NOTED ON PLANS OR AS DIRECTED BY THE MINISTRY ELECTRICAL REPRESENTATIVE.

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| E | | |
| D | TABLES FORMATTED FOR CLARITY | APR 20 |
| C | GENERAL REVISIONS | APR 17 |
| B | TYPE S BASES ADDED & REFERENCE CHANGED TO "MINISTRY ELECTRICAL REPRESENTATIVE" | OCT 03 |
| A | NOTE 5 ADDED | AUG 96 |

BACKFILL REQUIREMENTS FOR TYPE A, B, C, D2, D3, E2, E3, F2, F3, L2, L3, S2, S3, M2 & H2 CONCRETE BASES


Date Approved

**15/11/95 M.C. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.4.4

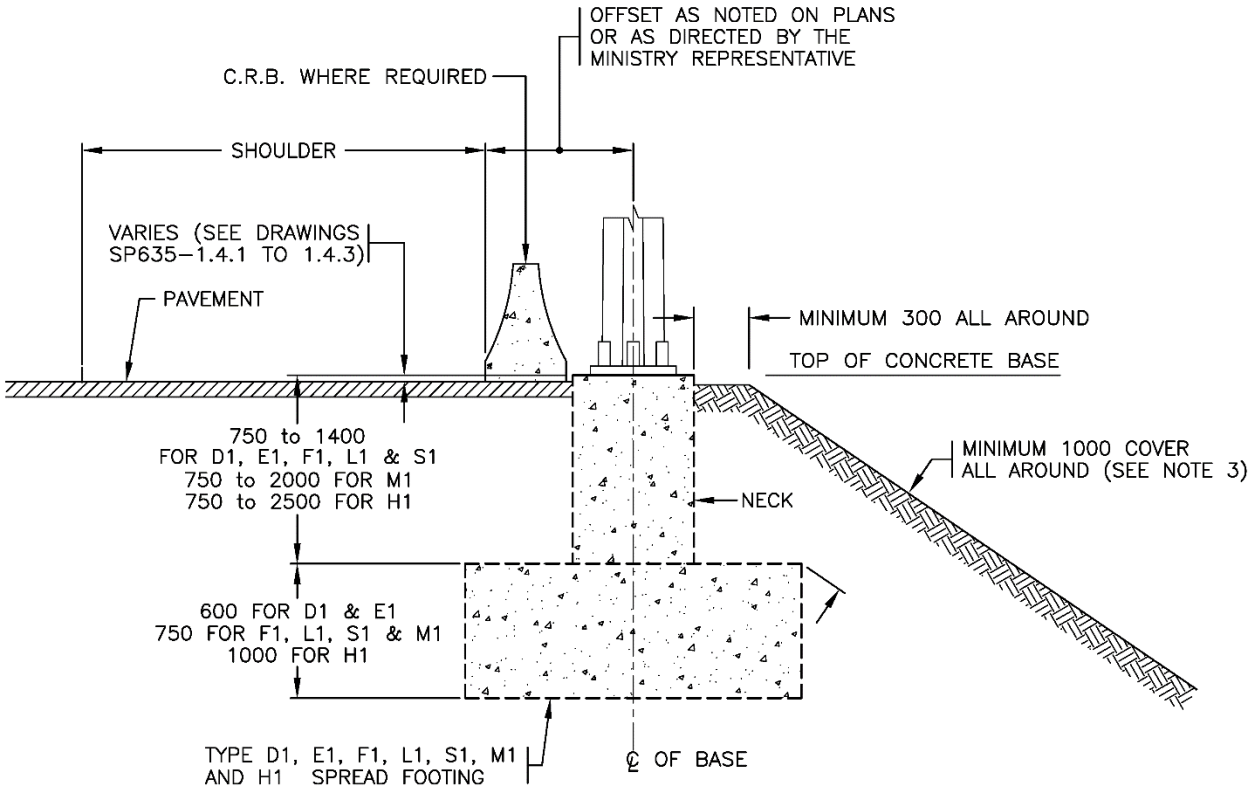


ELEVATION

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. VARY NECK HEIGHT UP TO THE MAXIMUMS SHOWN TO PROVIDE COVER AROUND SPREAD FOOTING.
4. BACKFILL MATERIAL SHALL BE INSTALLED & FULLY COMPACTED IN ACCORDANCE WITH SUBSECTION 635.07.01 TO PROVIDE THE MINIMUM COVER OVER THE SPREAD FOOTING.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | GENERAL REVISIONS | APR 17 |
| B | TYPE S1 BASES ADDED | OCT 03 |
| A | MAX. SLOPE DELETED & NECK HEIGHT REV'D | AUG 96 |

BACKFILL REQUIREMENTS FOR TYPE D1, E1, F1, L1, S1, M1 & H1 CONCRETE SPREAD FOOTINGS


Date Approved

**15/11/95 M.C. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.4.5

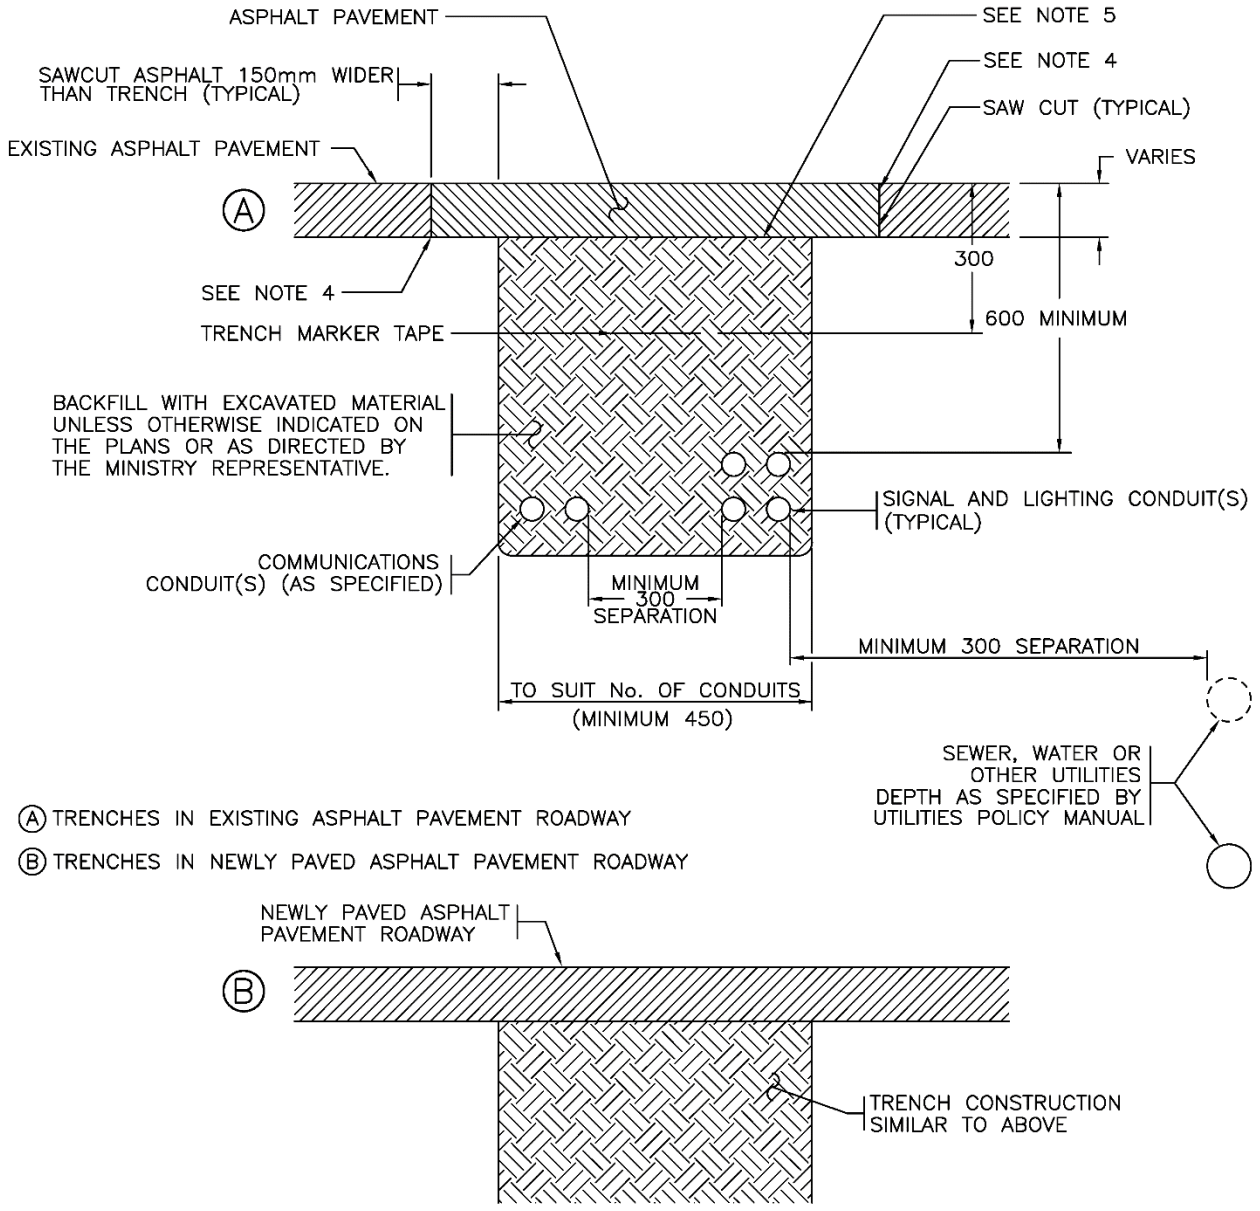


NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. WHERE MINIMUM CLEARANCES FROM UTILITIES CAN NOT BE MAINTAINED, NOTIFY THE MINISTRY REPRESENTATIVE.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
4. APPLY 0.25 $L/m^2$ OF RM–20 SEALANT TO THE EDGE OF EXISTING ASPHALT.
5. APPLY 1.5 $L/m^2$ OF RM–20 SEALANT TO THE GRAVEL BASE.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | GENERAL REVISIONS | APR 20 |
| B | GENERAL REVISIONS | APR 17 |
| A | GENERAL REVISIONS | AUG 94 |

# CONDUIT INSTALLATION IN PAVED AREAS


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–1.5.1

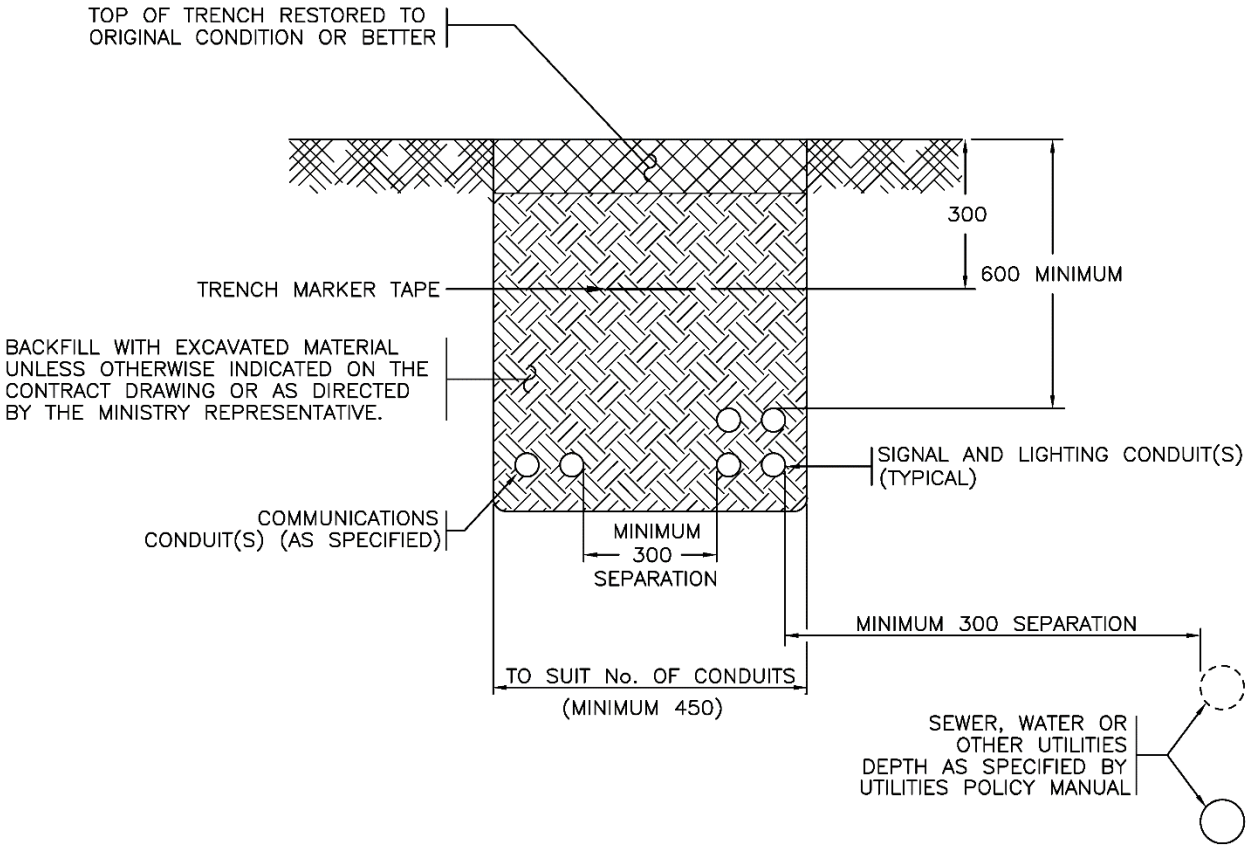


NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. WHERE MINIMUM CLEARANCES FROM UTILITIES CAN NOT BE MAINTAINED, NOTIFY THE MINISTRY REPRESENTATIVE.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | GENERAL REVISIONS | APR 20 |
| B | GENERAL REVISIONS | APR 17 |
| A | GENERAL REVISIONS | AUG 94 |

# CONDUIT INSTALLATION IN NON-PAVED AREAS


Date Approved

**30/09/93 E.L. (Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.5.2

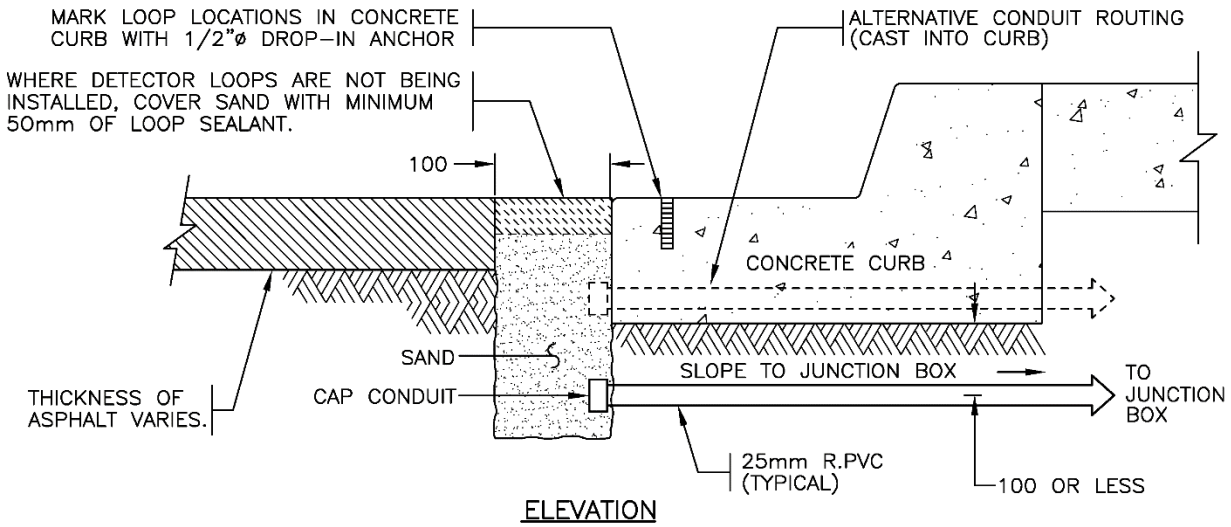


ELEVATION

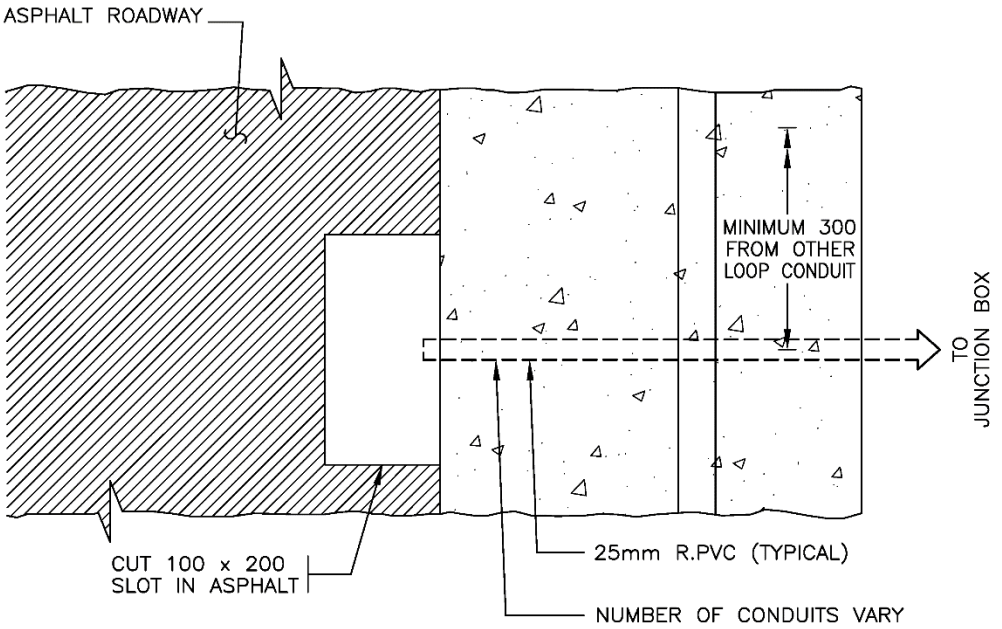


TOP VIEW

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. LOCATE LOOP CONDUIT IN ASPHALT TO SUIT LOOP LOCATIONS AND TO MINIMIZE THE LENGTH OF HOME RUN SLOTS IN THE ASPHALT.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | GENERAL REVISIONS | APR 17 |
| B | CONDUIT SLOT REVISED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

# LOOP CONDUIT INSTALLATION DETAILS AT CONCRETE CURB


Date Approved

**30/09/93 E.L.** **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-1.6.1

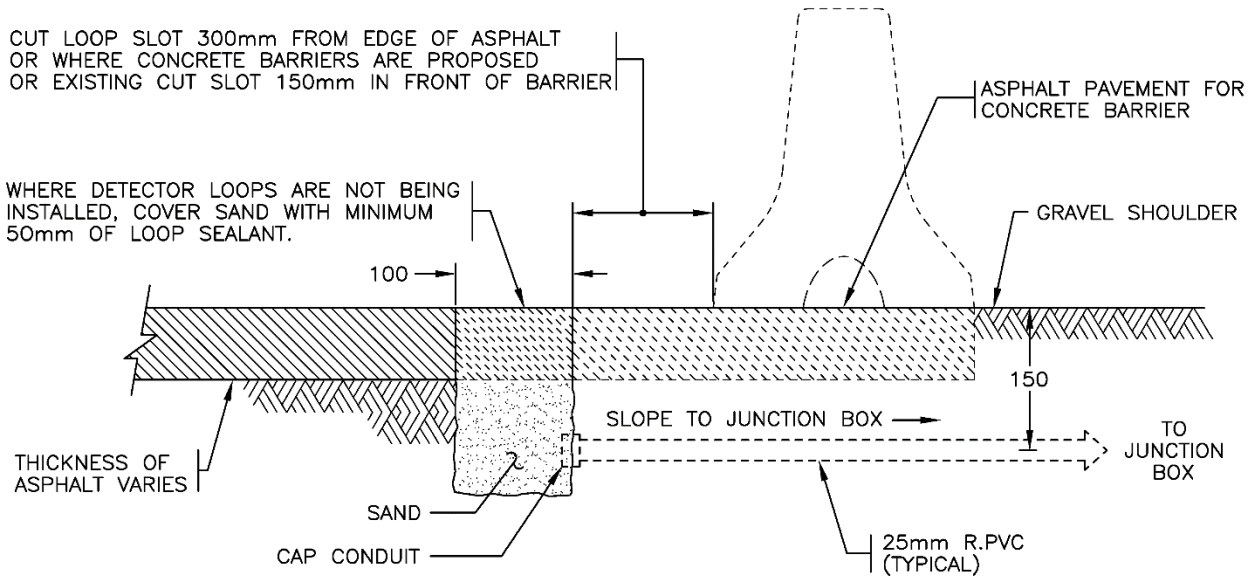


ELEVATION

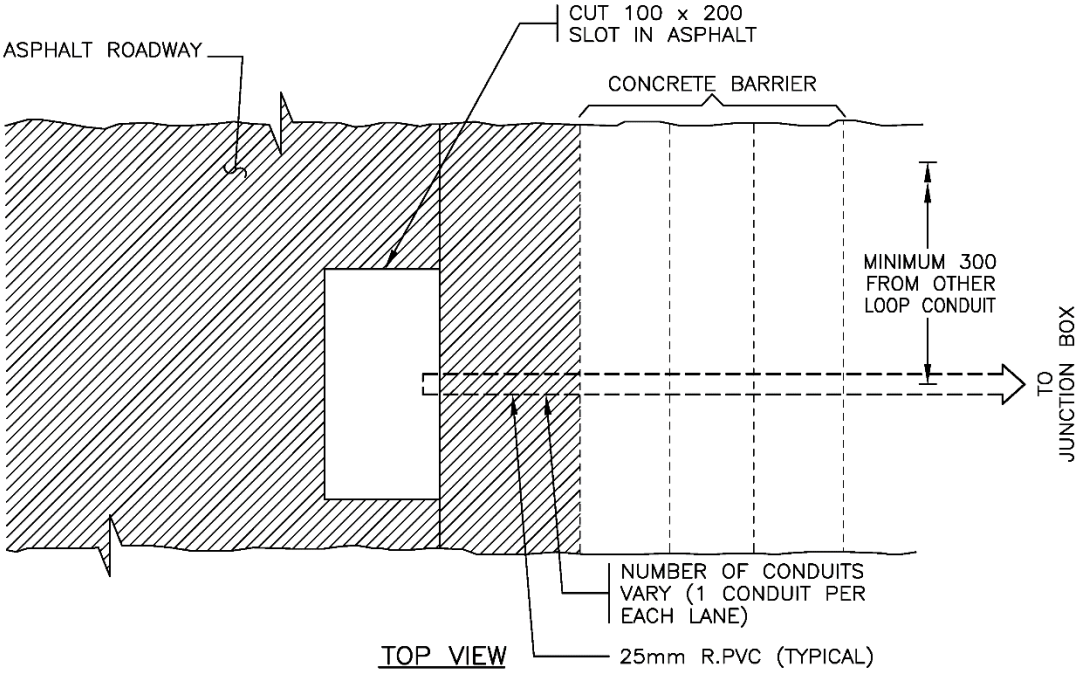


TOP VIEW

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
3. LOCATE LOOP CONDUIT IN ASPHALT TO SUIT LOOP LOCATIONS AND TO MINIMIZE THE LENGTH OF HOME RUN SLOTS IN THE ASPHALT.

NOT TO SCALE


BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | GENERAL REVISIONS | APR 17 |
| B | CONCRETE BARRIER SHOWN | NOV 98 |
| A | CONDUIT SLOT REVISED | AUG 95 |


## LOOP CONDUIT INSTALLATION DETAILS IN GRAVEL SHOULDER

Date: **18/11/94** Approved: **E.L.** **(Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–1.6.2

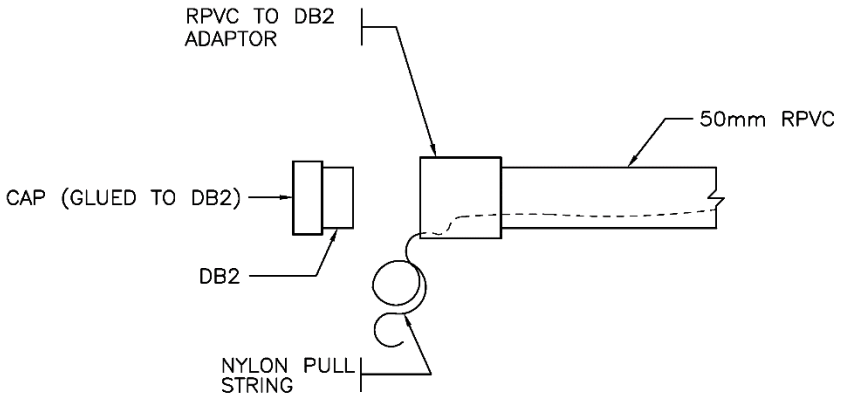


CONDUIT ADAPTOR AND
PLUG DETAIL

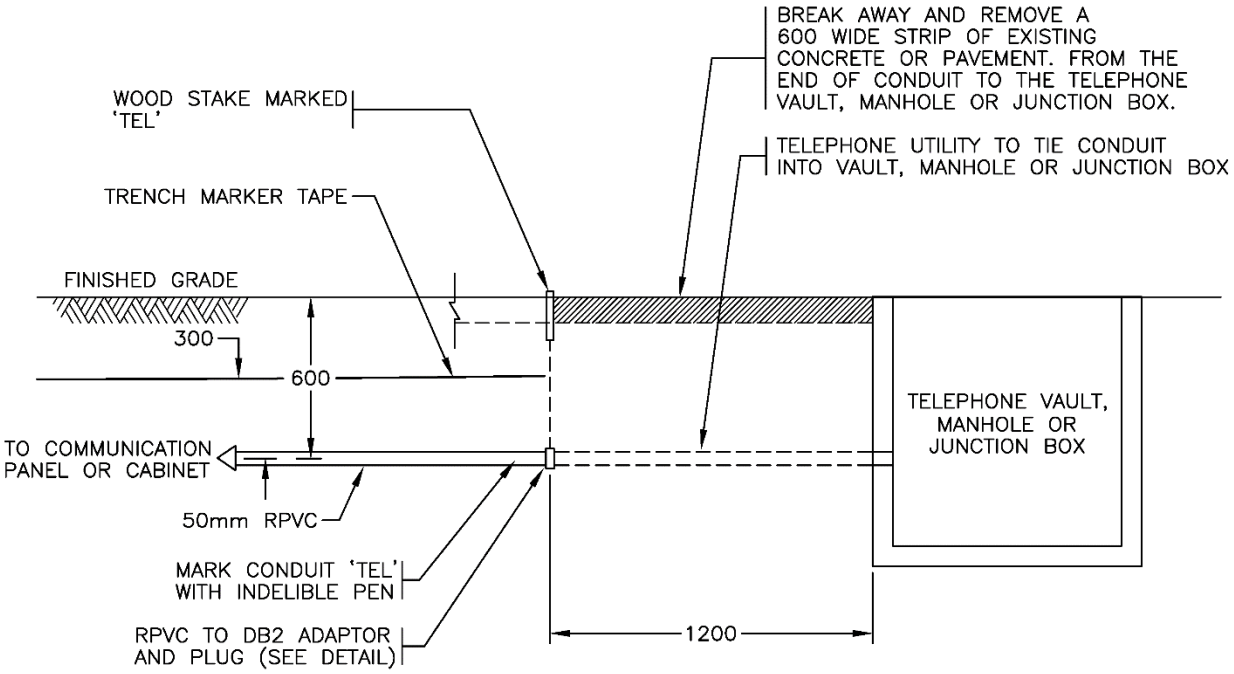


ELEVATION

NOTES

1. SEE STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | | |
| B | GENERAL REVISIONS | APR 20 |
| A | GENERAL REVISIONS | APR 17 |

CONDUIT TIE–IN TO TELEPHONE VAULT, MANHOLE OR JUNCTION BOX


Date Approved

**17/11/94 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635–1.7.1

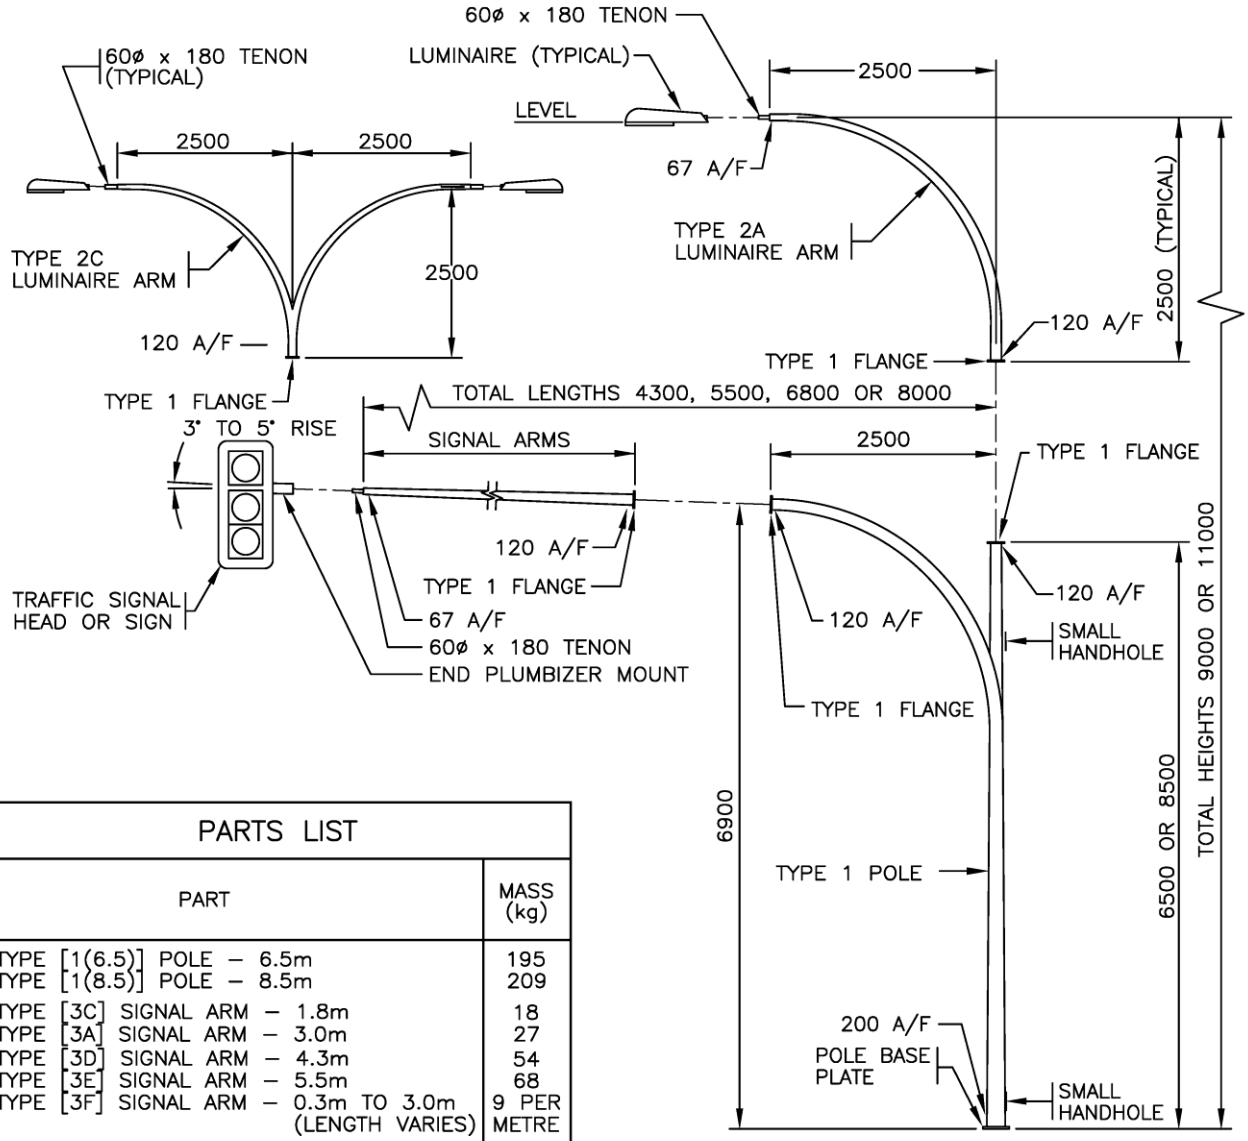


ELEVATION

| PARTS LIST | |
|---|---|
| PART | MASS (kg) |
| TYPE [1(6.5)] POLE – 6.5m | 195 |
| TYPE [1(8.5)] POLE – 8.5m | 209 |
| TYPE [3C] SIGNAL ARM – 1.8m | 18 |
| TYPE [3A] SIGNAL ARM – 3.0m | 27 |
| TYPE [3D] SIGNAL ARM – 4.3m | 54 |
| TYPE [3E] SIGNAL ARM – 5.5m | 68 |
| TYPE [3F] SIGNAL ARM – 0.3m TO 3.0m (LENGTH VARIES) | 9 PER METRE |
| TYPE [2A] LUMINAIRE ARM | 35 |
| TYPE [2C] LUMINAIRE ARM | 65 |
| POST TOP TENON [PTT] | 5 |
| TYPE 1 FLANGE COVER PLATE [1FCP] | 1.5 |

* [ ] I.D. LABEL ON POLE

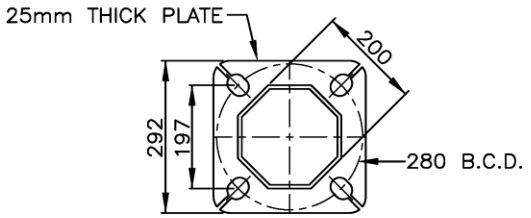


POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–2.1.2 FOR TYPE 1 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE


Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| G | TYPE 1 POLE HEIGHT | FEB 23 |
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | SIGNAL HEAD MOUNTING REVISED | OCT 03 |
| C | 3F ARM ADDED | AUG 96 |
| B | SIGNAL HEAD REVISED | AUG 95 |

# TYPE 1 POLE INSTALLATION DETAILS (SIGNAL POLE)

Date Approved: **30/09/93 E.L.** (Signature on File), Chief Highway Engineer

SPECIFICATION DRAWING No. SP635–2.1.1

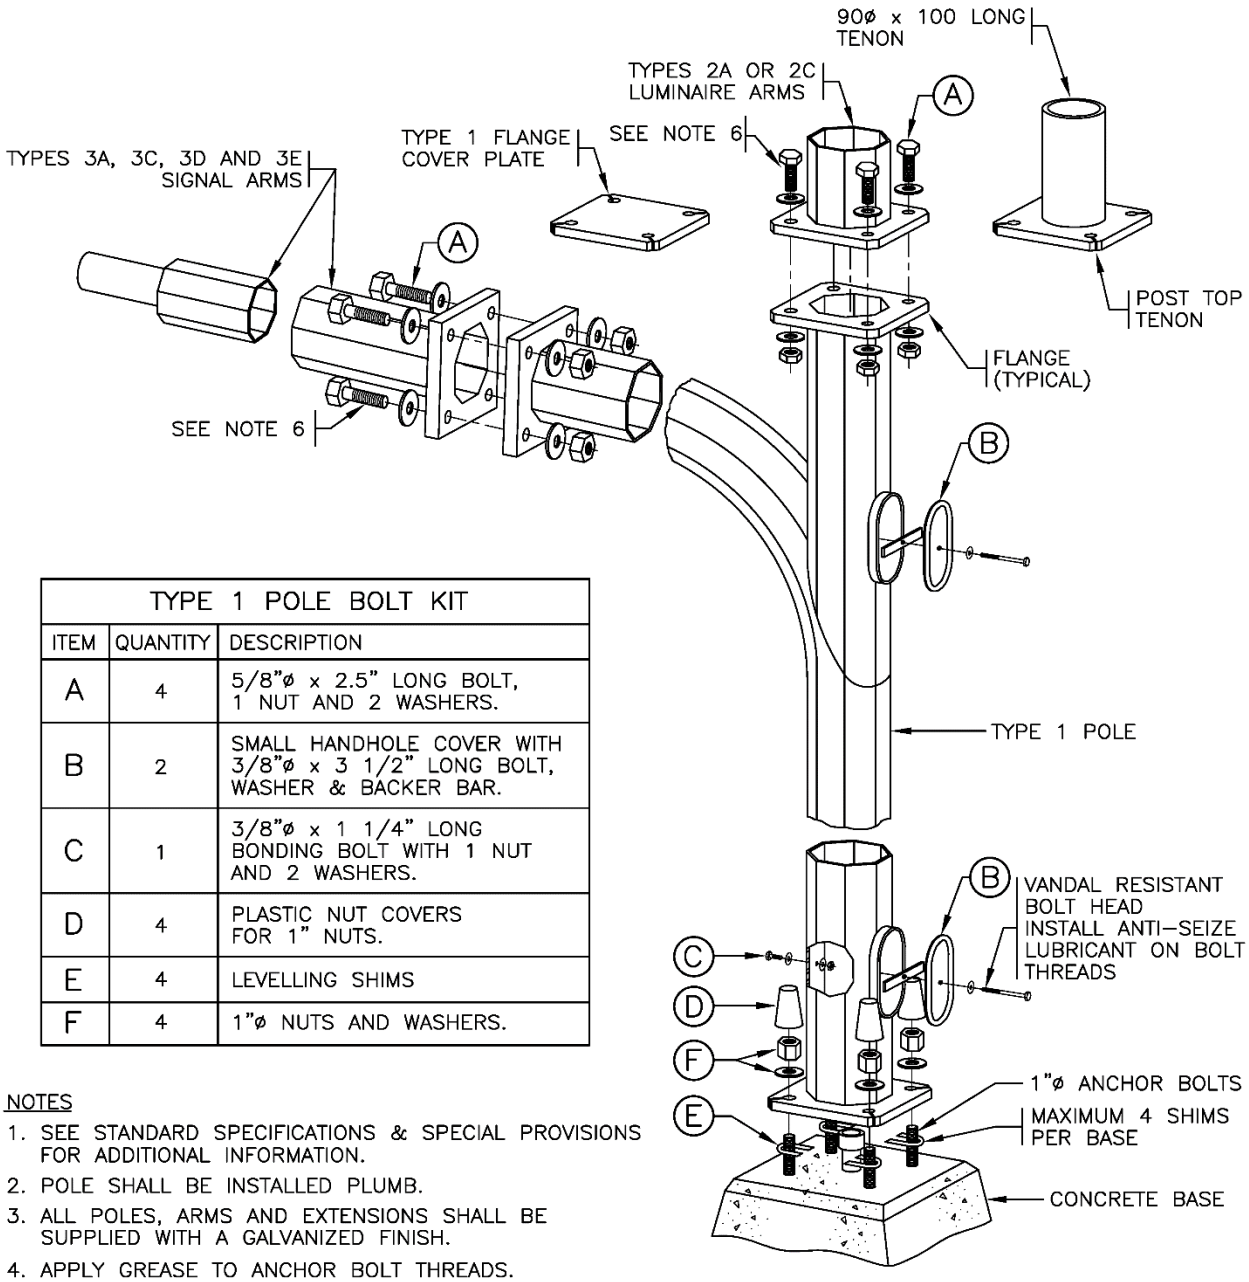


| TYPE 1 POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| A | 4 | 5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS. |
| B | 2 | SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER & BACKER BAR. |
| C | 1 | 3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS. |
| D | 4 | PLASTIC NUT COVERS FOR 1" NUTS. |
| E | 4 | LEVELLING SHIMS |
| F | 4 | 1"ø NUTS AND WASHERS. |

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN-OF-NUT" METHOD SPECIFIED IN CSA S6.

POLE ASSEMBLY DETAIL

NOT TO SCALE

Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | TYPE 1 FLANGE BOLTS CHANGED TO A325 | DEC 10 |
| C | ANTI-SEIZING LUBRICANT NOTED ON HANDHOLE BOLT | NOV 98 |
| B | HANDHOLE BOLT LENGTH REVISED | AUG 96 |

# TYPE 1 POLE INSTALLATION DETAILS (SIGNAL POLE)


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635-2.1.2

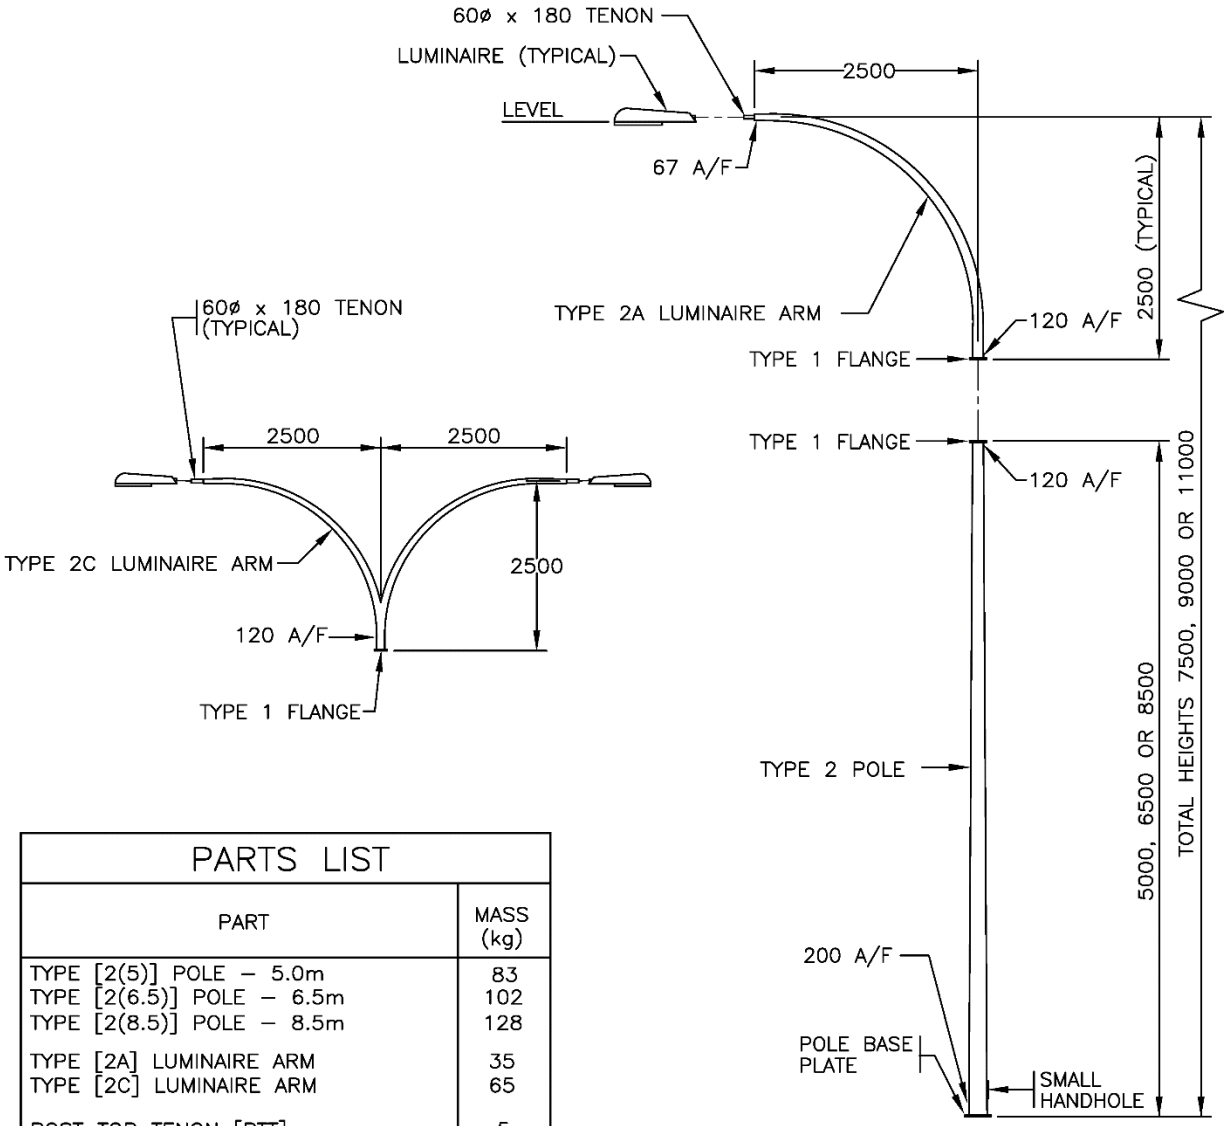


ELEVATION

| PARTS LIST | |
|---|---|
| PART | MASS (kg) |
| TYPE [2(5)] POLE – 5.0m | 83 |
| TYPE [2(6.5)] POLE – 6.5m | 102 |
| TYPE [2(8.5)] POLE – 8.5m | 128 |
| TYPE [2A] LUMINAIRE ARM | 35 |
| TYPE [2C] LUMINAIRE ARM | 65 |
| POST TOP TENON [PTT] | 5 |
| TYPE 1 FLANGE COVER PLATE [1FCP] | 1.5 |

* [ ] I.D. LABEL ON POLE

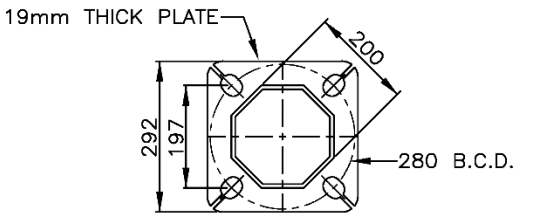


POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–2.1.4 FOR TYPE 2 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | | |
| B | GENERAL REVISIONS | APR 17 |
| A | GENERAL REVISIONS | AUG 94 |

# TYPE 2 POLE INSTALLATION DETAILS (7.5 m, 9.0 m AND 11.0 m LUMINAIRE POLES)


Date Approved

**30/09/93 E.L. (Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.1.3

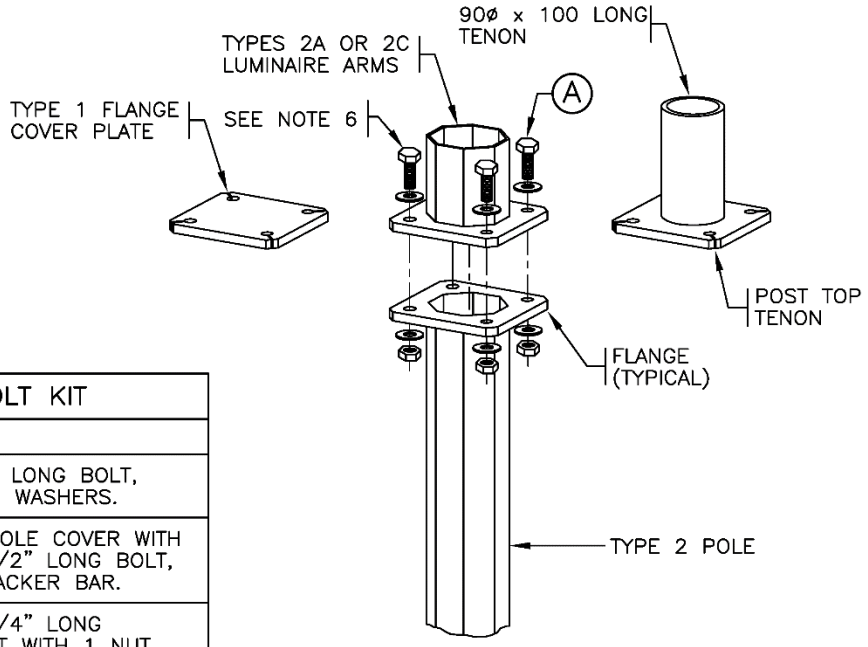


| TYPE 2 POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| A | 4 | 5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS. |
| B | 1 | SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER & BACKER BAR. |
| C | 1 | 3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS. |
| D | 4 | PLASTIC NUT COVERS FOR 1" NUTS. |
| E | 4 | LEVELLING SHIMS. |
| F | 4 | 1"ø NUTS AND WASHERS. |

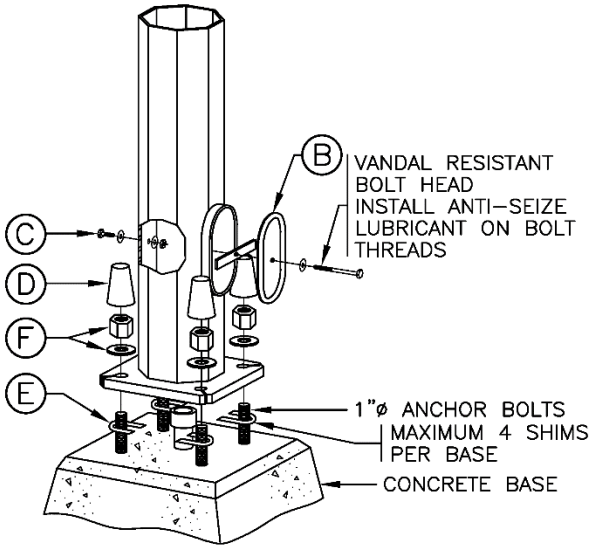


POLE ASSEMBLY DETAIL

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN-OF-NUT" METHOD SPECIFIED IN CSA S6.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | TYPE 1 FLANGE BOLTS CHANGED TO A325 | DEC 10 |
| C | ANTI-SEIZING LUBRICANT NOTED ON HANDHOLE BOLT | NOV 98 |
| B | HANDHOLE BOLT LENGTH REVISED | AUG 96 |

# TYPE 2 POLE INSTALLATION DETAILS (7.5 m, 9.0 m AND 11.0 m LUMINAIRE POLES)


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635-2.1.4

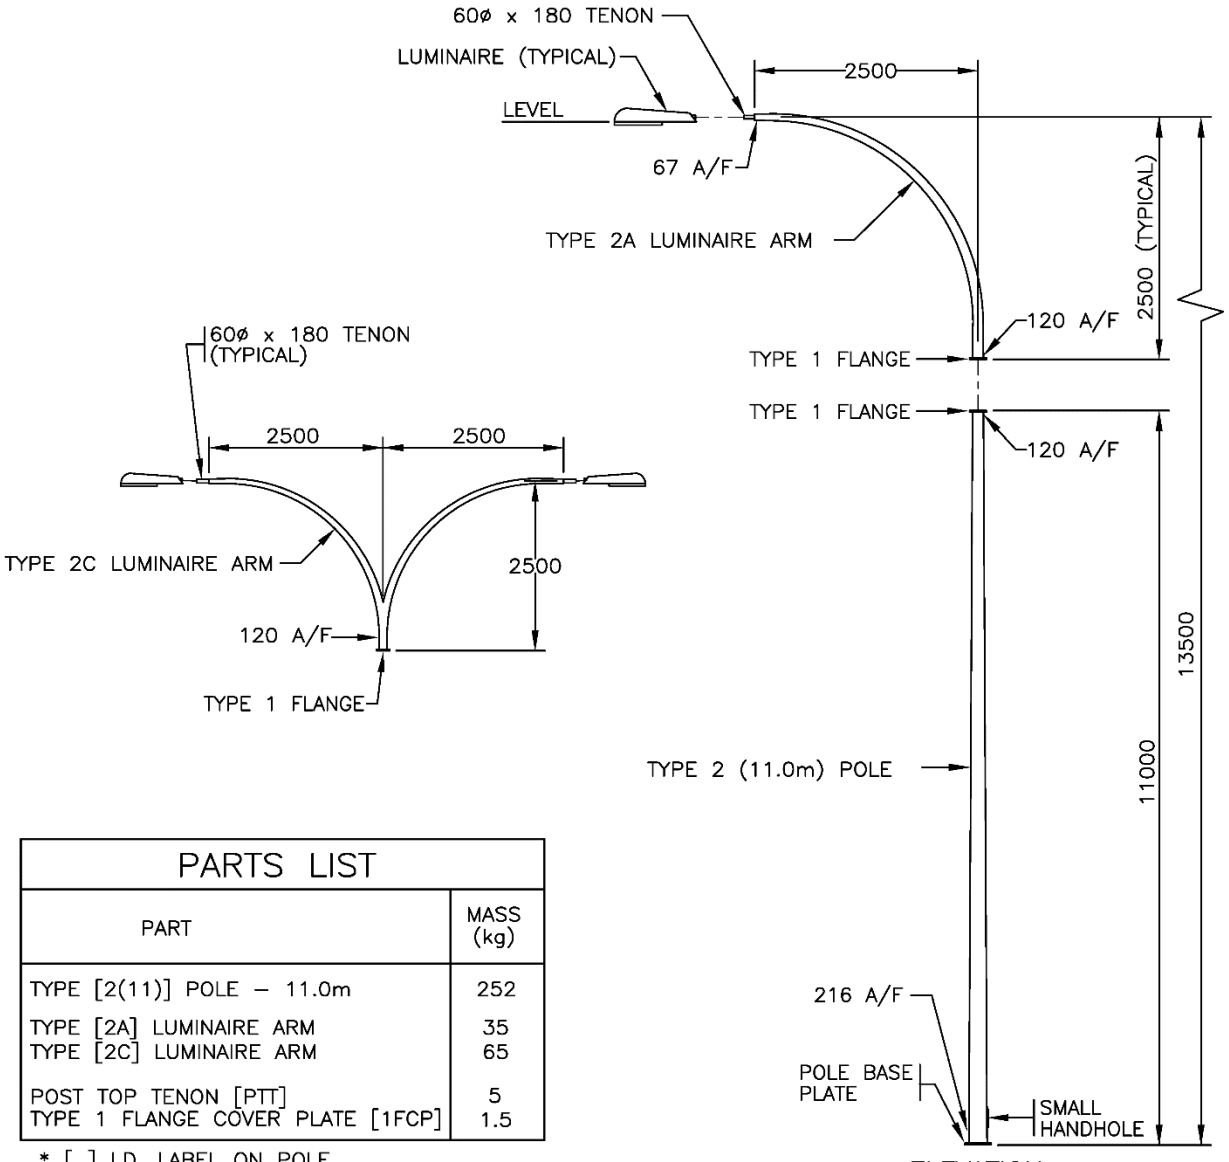


ELEVATION

| PARTS LIST | |
|---|---|
| PART | MASS (kg) |
| TYPE [2(11)] POLE – 11.0m | 252 |
| TYPE [2A] LUMINAIRE ARM | 35 |
| TYPE [2C] LUMINAIRE ARM | 65 |
| POST TOP TENON [PTT] | 5 |
| TYPE 1 FLANGE COVER PLATE [1FCP] | 1.5 |

* [ ] I.D. LABEL ON POLE

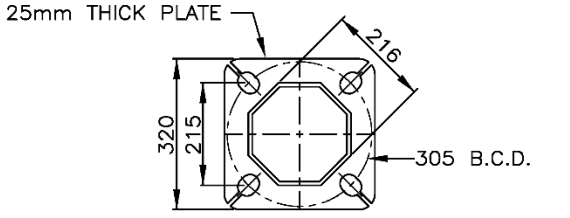


POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–2.1.6 FOR TYPE 2 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | | |
| B | GENERAL REVISIONS | APR 17 |
| A | GENERAL REVISIONS | AUG 94 |

# TYPE 2 POLE INSTALLATION DETAILS (13.5 m LUMINAIRE POLE)


Date Approved

**30/09/93 E.L. (Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.1.5

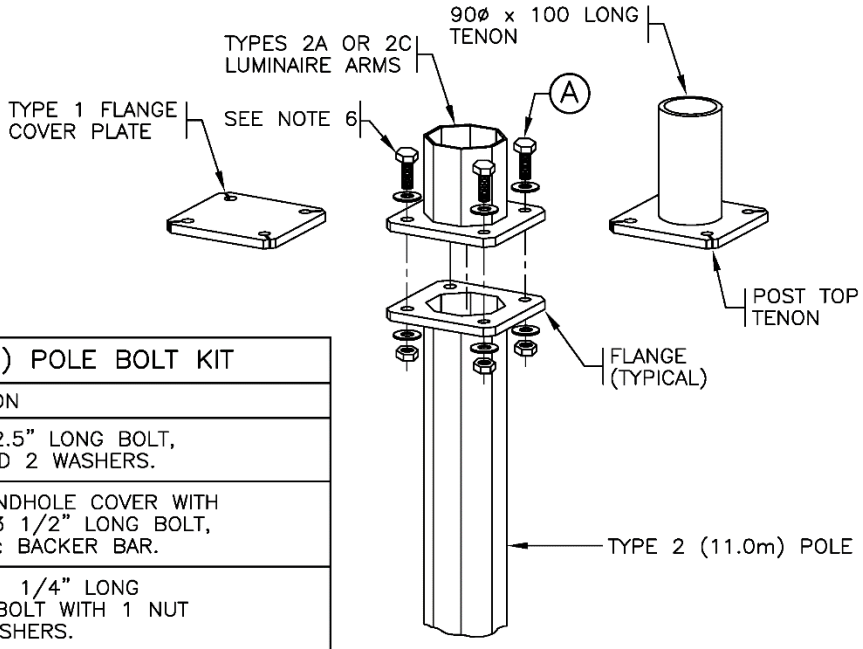


| TYPE 2 (11.0m) POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| A | 4 | 5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS. |
| B | 1 | SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER & BACKER BAR. |
| C | 1 | 3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS. |
| D | 4 | PLASTIC NUT COVERS FOR 1 1/4" NUTS. |
| E | 4 | LEVELLING SHIMS. |
| F | 4 | 1 1/4"ø NUTS AND WASHERS. |

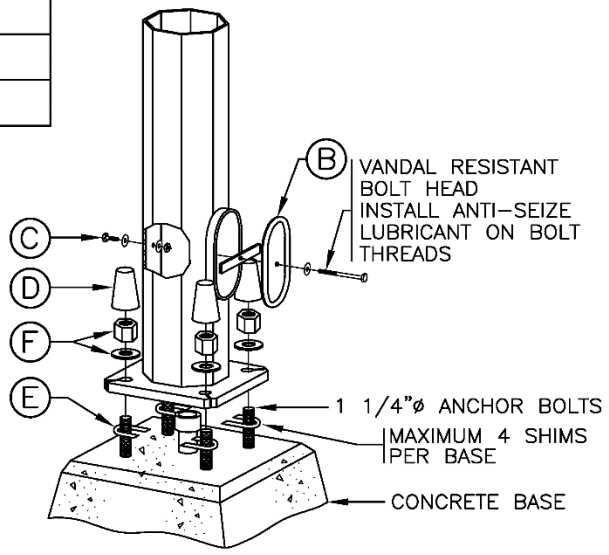


POLE ASSEMBLY DETAIL

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN-OF-NUT" METHOD SPECIFIED IN CSA S6.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | TYPE 1 FLANGE BOLTS CHANGED TO A325 | DEC 10 |
| C | ANTI-SEIZING LUBRICANT NOTED ON HANDHOLE BOLT | NOV 98 |
| B | HANDHOLE BOLT LENGTH REVISED | AUG 96 |

# TYPE 2 POLE INSTALLATION DETAILS (13.5 m LUMINAIRE POLE)


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635-2.1.6

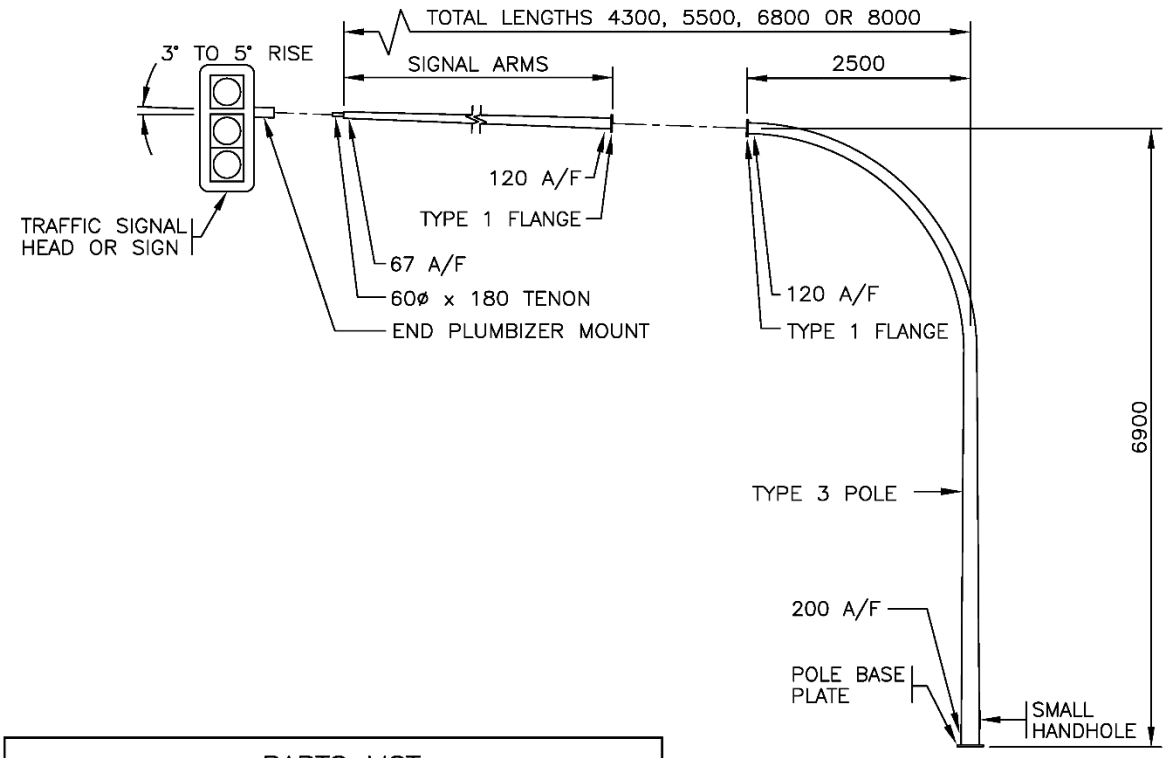


ELEVATION

| PARTS LIST | |
|---|---|
| PART | MASS (kg) |
| TYPE [3] POLE | 186 |
| TYPE [3C] SIGNAL ARM – 1.8m | 18 |
| TYPE [3A] SIGNAL ARM – 3.0m | 27 |
| TYPE [3D] SIGNAL ARM – 4.3m | 54 |
| TYPE [3E] SIGNAL ARM – 5.5m | 68 |
| TYPE [3F] SIGNAL ARM – 0.3m to 3.0m (LENGTH VARIES) | 9 PER METRE |

* [ ] I.D. LABEL ON POLE

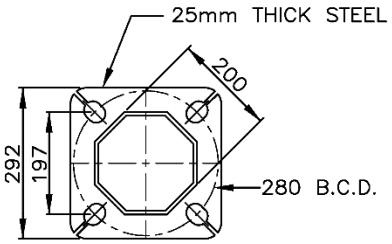


POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–2.1.8 FOR TYPE 3 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | SIGNAL HEAD MOUNTING REVISED | OCT 03 |
| C | 3F ARM ADDED | AUG 96 |
| B | SIGNAL HEAD REVISED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

# TYPE 3 POLE INSTALLATION DETAILS (SIGNAL POLE)


Date Approved

**30/09/93 E.L.** **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.1.7

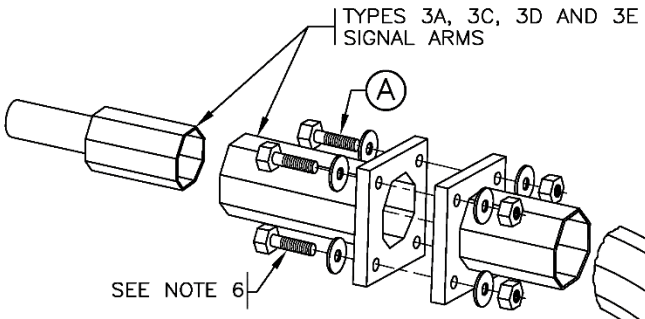


| TYPE 3 POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| A | 4 | 5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS. |
| B | 1 | SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER & BACKER BAR. |
| C | 1 | 3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS. |
| D | 4 | PLASTIC NUT COVERS FOR 1" NUTS. |
| E | 4 | LEVELLING SHIMS. |
| F | 4 | 1"ø NUTS AND WASHERS. |

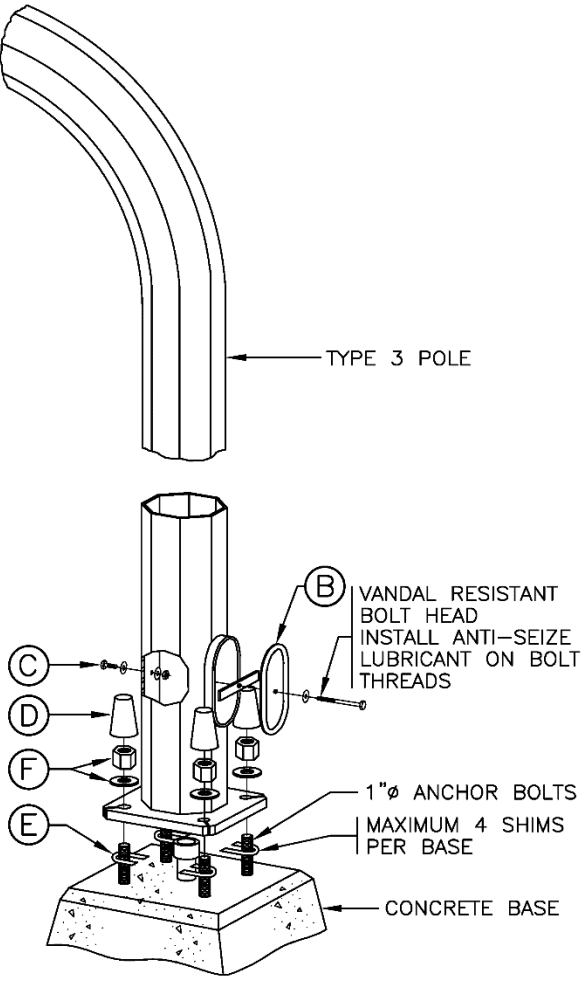


POLE ASSEMBLY DETAIL

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN-OF-NUT" METHOD SPECIFIED IN CSA S6.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | TYPE 1 FLANGE BOLTS CHANGED TO A325 | DEC 10 |
| C | ANTI-SEIZING LUBRICANT NOTED ON HANDHOLE BOLT | NOV 98 |
| B | HANDHOLE BOLT LENGTH REVISED | AUG 96 |

# TYPE 3 POLE INSTALLATION DETAILS (SIGNAL POLE)


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer


SPECIFICATION DRAWING No.

SP635-2.1.8

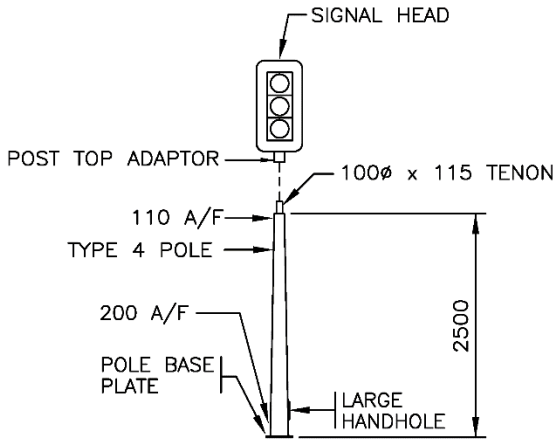



TYPE 4 POLE

**FOR REFERENCE ONLY**
USE TYPE 4A SHAFT IN PLACE OF TYPE 4 SHAFT AND MOUNT SIGNAL HEADS WITH SINGLE ARM BRACKETS

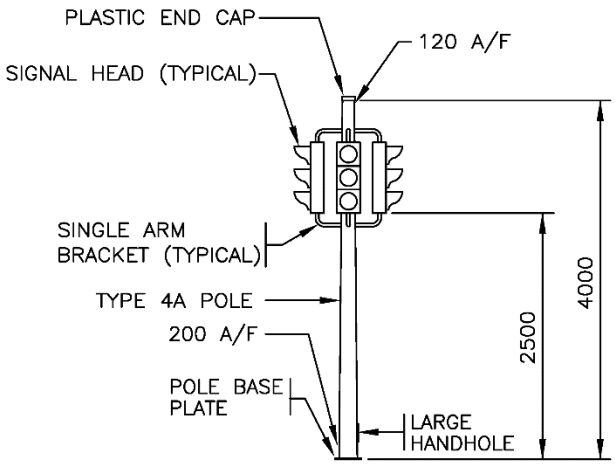



TYPE 4A POLE

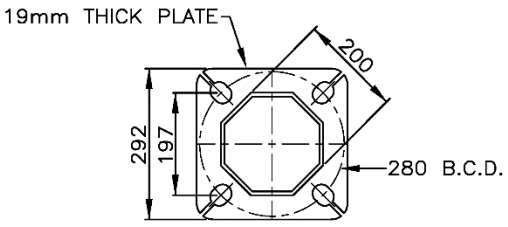


POLE BASE PLATE

| PARTS LIST | |
|---|---|
| PART | MASS (kg) |
| TYPE [4] POLE | 45 |
| TYPE [4A] POLE | 66 |
| TYPE [5] POLE | 77 |

* [ ] I.D. LABEL ON POLE

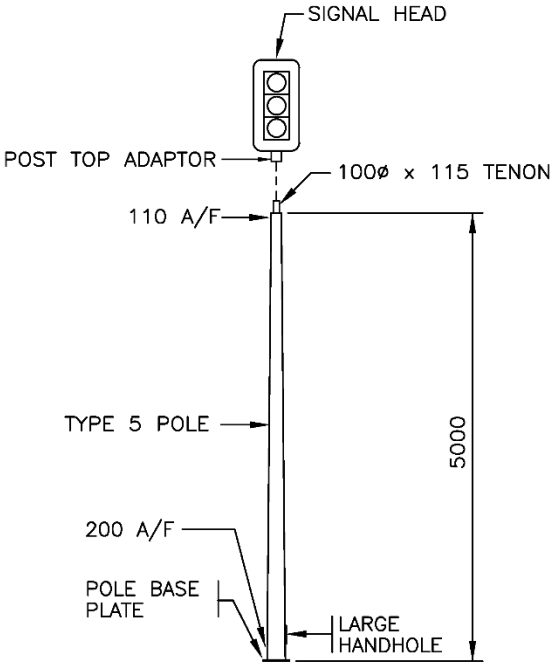


TYPE 5 POLE

**FOR REFERENCE ONLY**
USE TYPE 2–6.5m SHAFT IN PLACE OF TYPE 5 SHAFT AND MOUNT SIGNAL HEADS WITH SINGLE ARM BRACKETS

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–2.1.10 FOR TYPE 4, 4A AND 5 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSION ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | | |
| E | | |
| D | | |
| C | GENERAL REVISIONS | APR 17 |
| B | ALTERNATES NOTED | OCT 03 |
| A | GENERAL REVISIONS | AUG 94 |


# TYPE 4, 4A AND 5 POLE INSTALLATION DETAILS

Date Approved
**30/09/93 E.L. (Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–2.1.9

| TYPE 4 & 5 POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| B | 1 | LARGE HANDHOLE COVER WITH 2–3/8"ø x 1 1/4" LONG BOLTS AND 2 WASHERS. |
| C | 1 | 3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 3 WASHERS. |
| D | 4 | PLASTIC NUT COVERS FOR 1" NUTS. |
| E | 4 | LEVELLING SHIMS. |
| F | 4 | 1"ø NUTS AND WASHERS. |

| TYPE 4A POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| A | 1 | PLASTIC END CAP |
| B | 1 | LARGE HANDHOLE COVER WITH 2–3/8"ø x 1 1/4" LONG BOLTS AND 2 WASHERS. |
| C | 1 | 3/8"ø x 1" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS. |
| D | 4 | PLASTIC NUT COVERS FOR 1" NUTS. |
| E | 4 | LEVELLING SHIMS. |
| F | 4 | 1"ø NUTS AND WASHERS. |

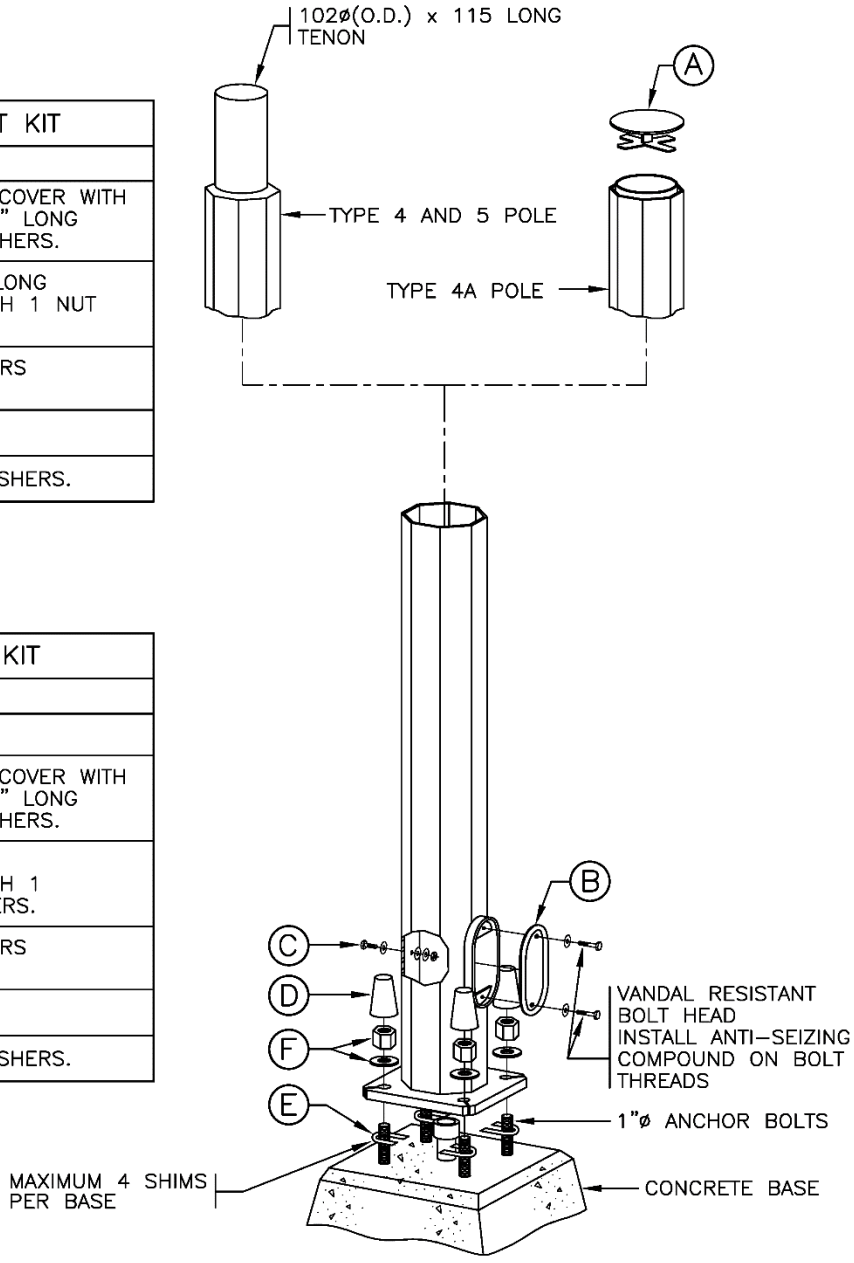


POLE ASSEMBLY DETAIL

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| E | | |
| D | GENERAL REVISIONS | APR 17 |
| C | ANTI–SEIZING COMPOUND NOTED ON HANDHOLE BOLTS | NOV 98 |
| B | HANDHOLE BOLT LENGTH REVISED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

TYPE 4, 4A AND 5 POLE INSTALLATION DETAILS (SIGNAL POSTS)


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.


SP635–2.1.10

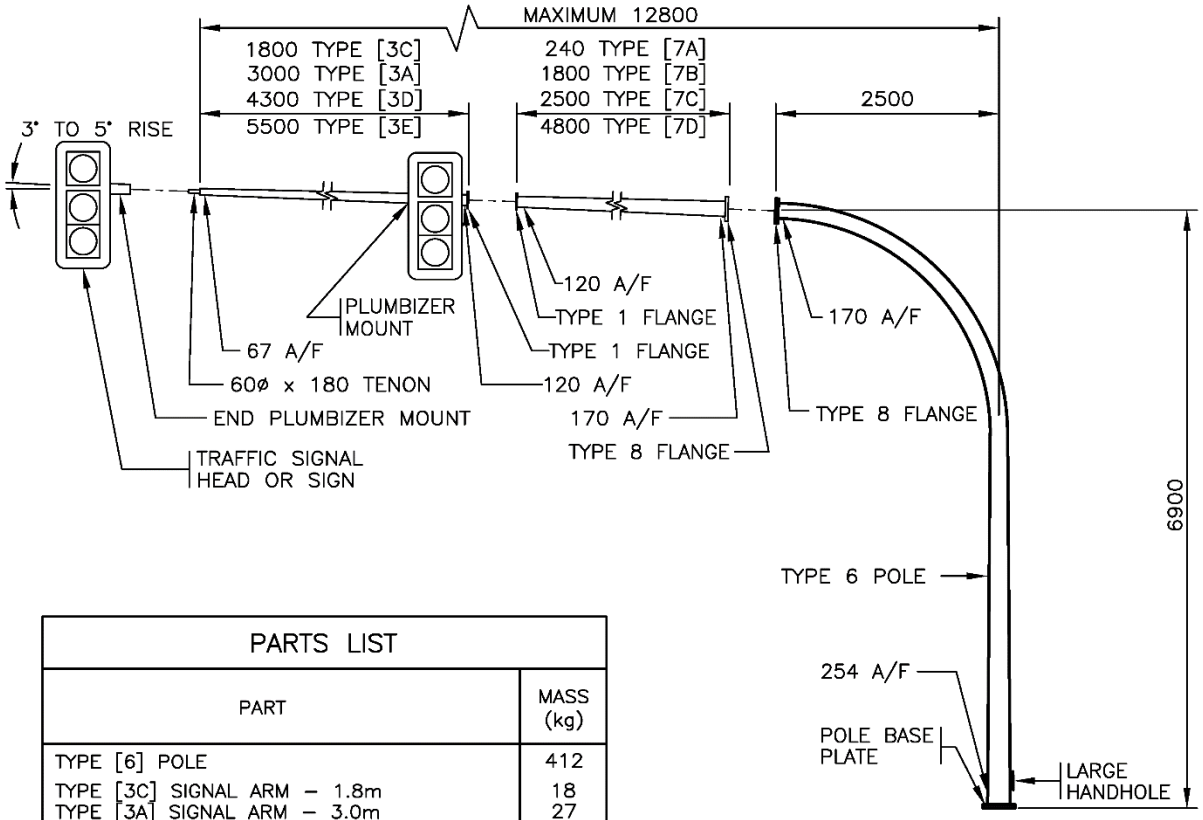


ELEVATION

| PARTS LIST | |
|---|---|
| PART | MASS (kg) |
| TYPE [6] POLE | 412 |
| TYPE [3C] SIGNAL ARM – 1.8m | 18 |
| TYPE [3A] SIGNAL ARM – 3.0m | 27 |
| TYPE [3D] SIGNAL ARM – 4.3m | 54 |
| TYPE [3E] SIGNAL ARM – 5.5m | 68 |
| TYPE [3F] SIGNAL ARM – 0.3m to 3.0m (LENGTH VARIES) | 9 PER METRE |
| TYPE [7A] EXTENSION – 0.24m | 20 |
| TYPE [7B] EXTENSION – 1.8m | 69 |
| TYPE [7C] EXTENSION – 2.5m | 86 |
| TYPE [7D] EXTENSION – 4.8m | 154 |
| TYPE 1 FLANGE COVER PLATE [1FCP] | 1.5 |
| TYPE 8 FLANGE COVER PLATE [8FCP] | 2.5 |

* [ ] I.D. LABEL ON POLE

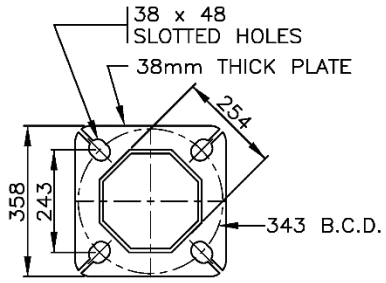


POLE BASE PLATE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–2.1.12 FOR TYPE 6 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | SIGNAL HEAD MOUNTING REVISED | OCT 03 |
| C | 3F ARM ADDED | AUG 96 |
| B | SIGNAL HEAD REVISED & PLATE HOLE SIZE ADDED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

# TYPE 6 POLE INSTALLATION DETAILS (SIGNAL POLE)


Date Approved

**30/09/93 E.L.** **(Signature on File)**


Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.1.11

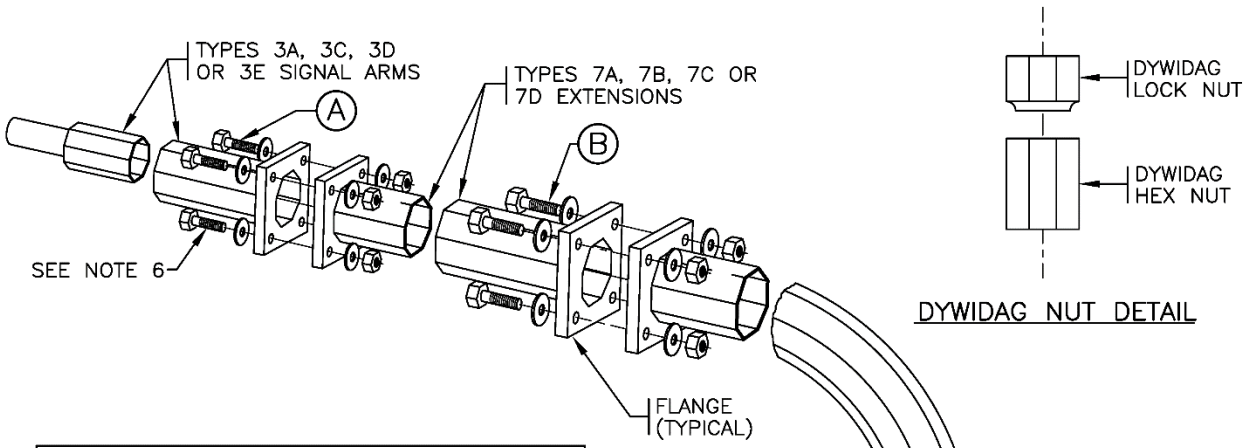


| TYPE 6 POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| A | 4 | 5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS. |
| B | 4 | 1"ø x 4" LONG BOLT, 1 NUT AND 2 WASHERS. |
| C | 1 | LARGE HANDHOLE COVER WITH 2–3/8"ø x 1" LONG BOLTS AND 2 WASHERS. |
| D | 1 | 3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS. |
| E | 4 | LEVELLING SHIMS. |

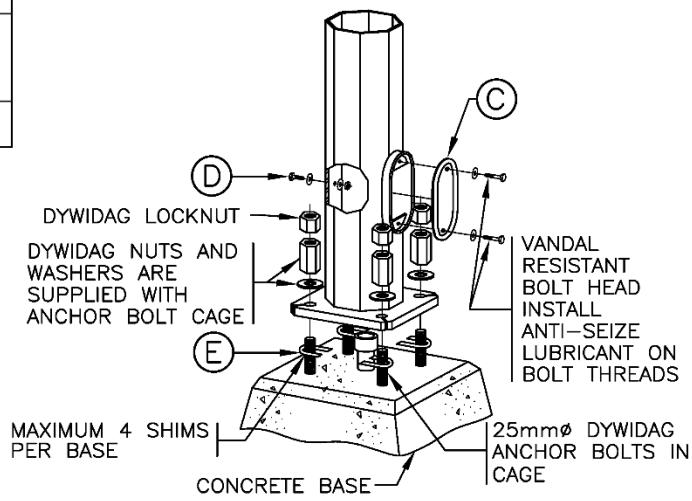


POLE ASSEMBLY DETAIL

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS. TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 GRADE A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN–OF–NUT" METHOD SPECIFIED IN CSA S6.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | TYPE 1 & 8 FLANGE BOLTS CHANGED TO A325 | DEC 10 |
| C | ANTI–SEIZING LUBRICANT NOTED ON HANDHOLE BOLT | NOV 98 |
| B | HANDHOLE BOLT LENGTH REVISED | AUG 95 |

# TYPE 6 POLE INSTALLATION DETAILS (SIGNAL POLE)


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.1.12

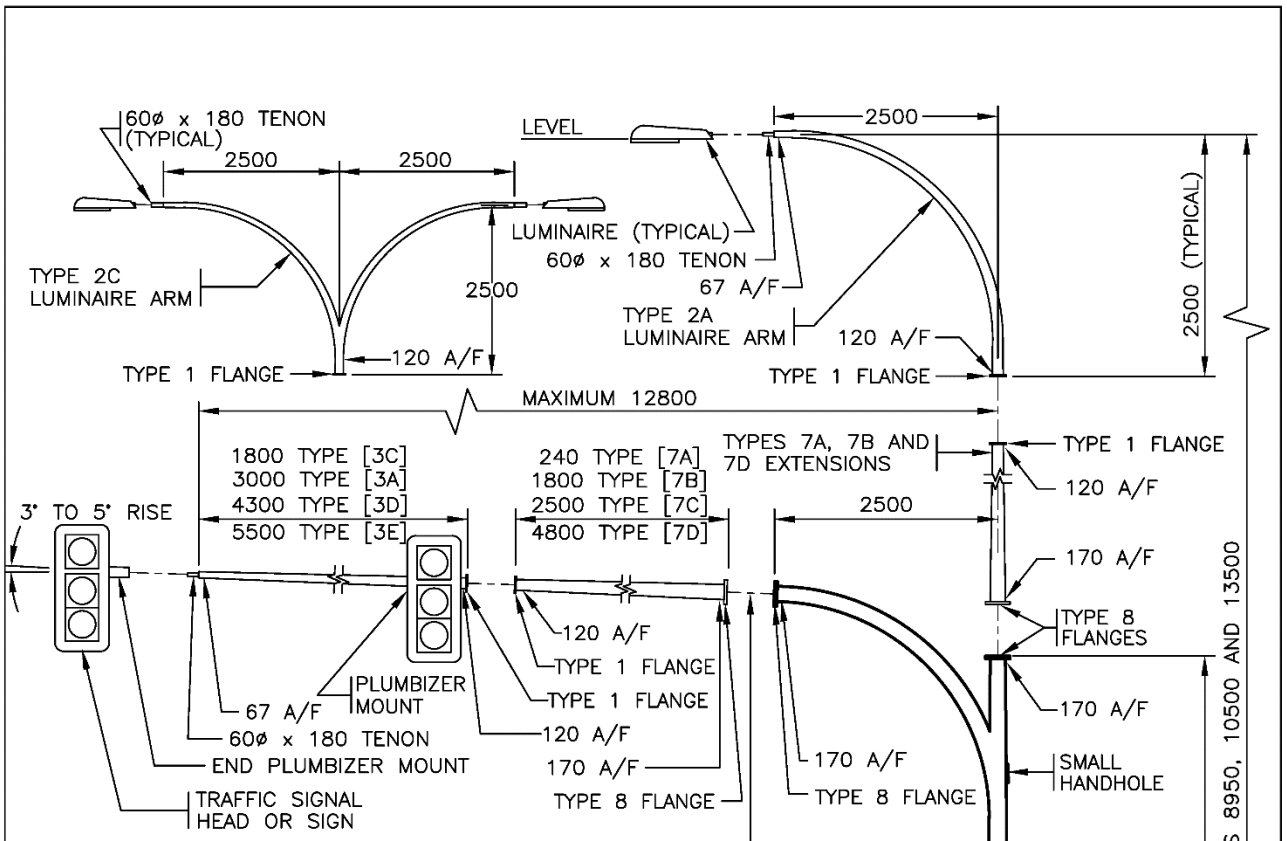


| PARTS LIST | |
|---|---|
| PART | MASS (kg) |
| TYPE [7] POLE | 465 |
| TYPE [3C] SIGNAL ARM – 1.8m | 18 |
| TYPE [3A] SIGNAL ARM – 3.0m | 27 |
| TYPE [3D] SIGNAL ARM – 4.3m | 54 |
| TYPE [3E] SIGNAL ARM – 5.5m | 68 |
| TYPE [3F] SIGNAL ARM – 0.3m to 3.0m (LENGTH VARIES) | 9 PER METRE |
| TYPE [7A] EXTENSION – 0.24m | 20 |
| TYPE [7B] EXTENSION – 1.8m | 69 |
| TYPE [7C] EXTENSION – 2.5m | 86 |
| TYPE [7D] EXTENSION – 4.8m | 154 |
| TYPE [2A] LUMINAIRE ARM | 35 |
| TYPE [2C] LUMINAIRE ARM | 65 |
| POST TOP TENON [PTT] | 5 |
| TYPE 1 FLANGE COVER PLATE [1FCP] | 1.5 |
| TYPE 8 FLANGE COVER PLATE [8FCP] | 2.5 |


* [ ] I.D. LABEL ON POLE

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. SEE DRAWING SP635–2.1.14 FOR TYPE 7 POLE, BOLT KITS AND POLE ASSEMBLY DETAILS.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

NOT TO SCALE

ELEVATION

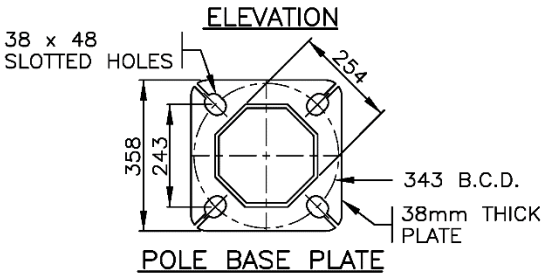


POLE BASE PLATE

BRITISH COLUMBIA Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| F | GENERAL REVISIONS | APR 20 |
| E | GENERAL REVISIONS | APR 17 |
| D | SIGNAL HEAD MOUNTING REVISED | OCT 03 |
| C | 3F ARM ADDED | AUG 96 |
| B | SIGNAL HEAD REVISED & PLATE HOLE SIZE ADDED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

# TYPE 7 POLE INSTALLATION DETAILS (SIGNAL POLE)


Date Approved

**30/09/93 E.L. (Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635–2.1.13

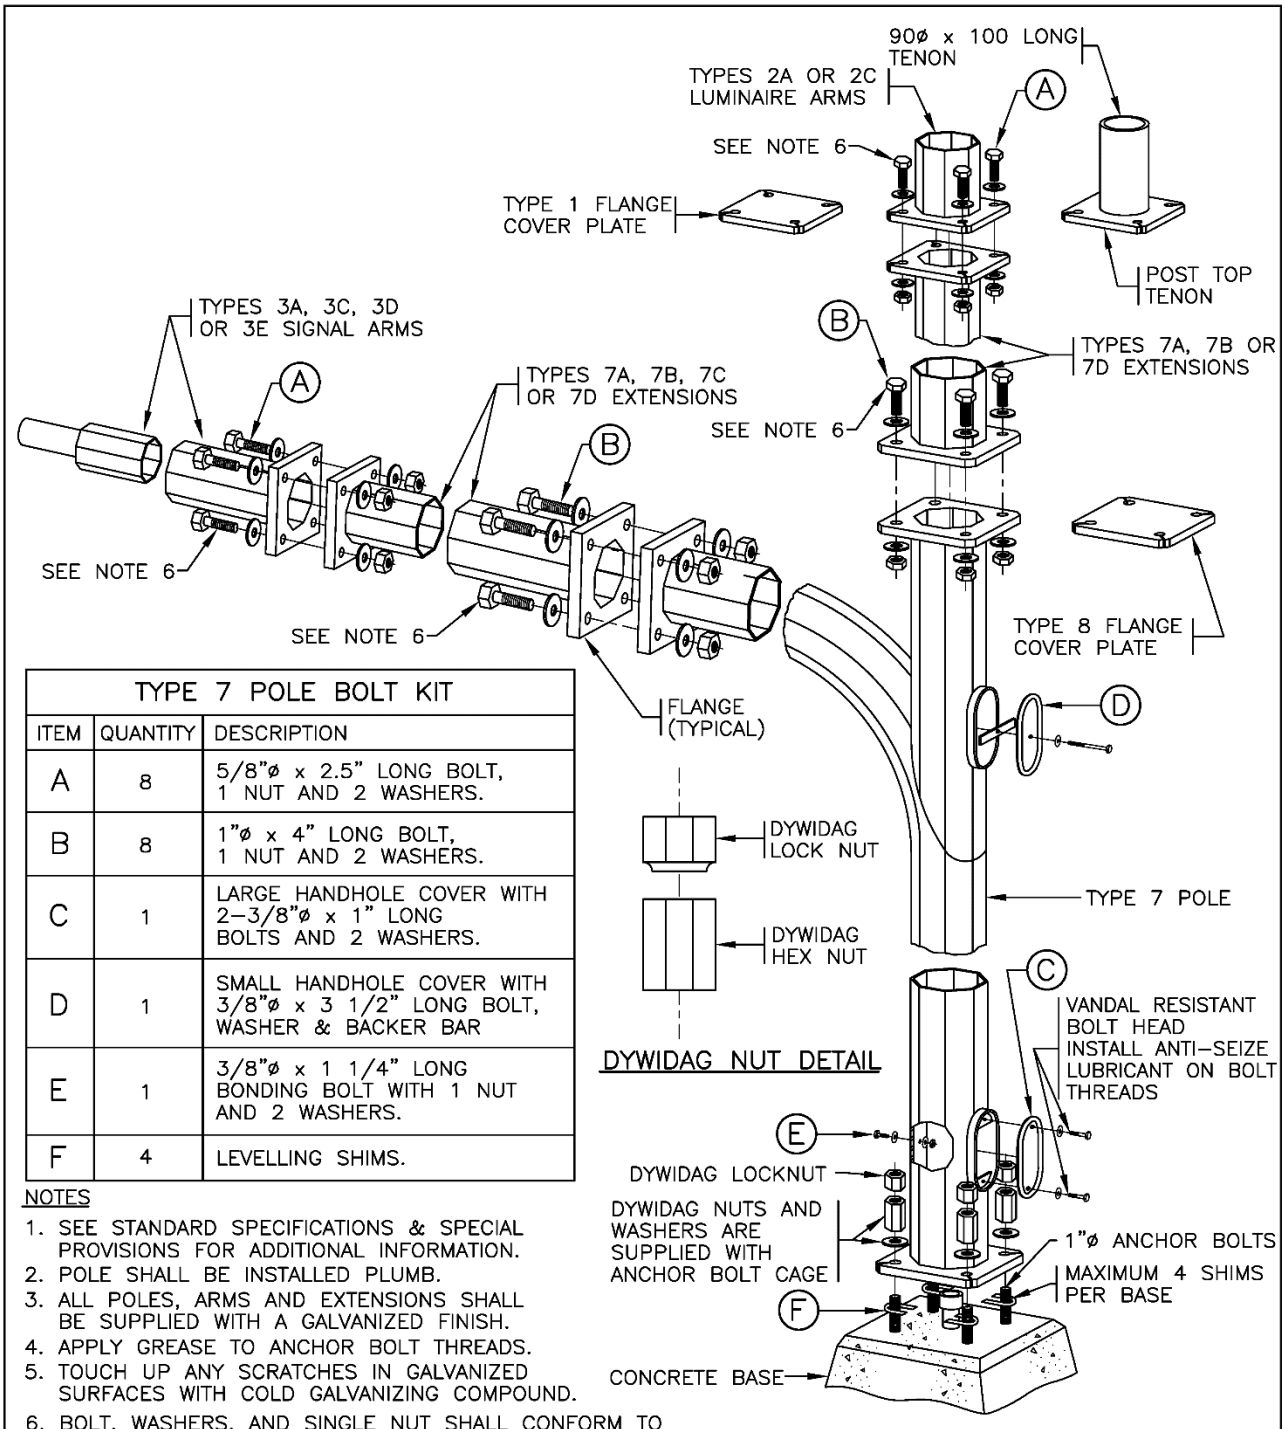


| TYPE 7 POLE BOLT KIT | | |
|---|---|---|
| ITEM | QUANTITY | DESCRIPTION |
| A | 8 | 5/8"ø x 2.5" LONG BOLT, 1 NUT AND 2 WASHERS. |
| B | 8 | 1"ø x 4" LONG BOLT, 1 NUT AND 2 WASHERS. |
| C | 1 | LARGE HANDHOLE COVER WITH 2-3/8"ø x 1" LONG BOLTS AND 2 WASHERS. |
| D | 1 | SMALL HANDHOLE COVER WITH 3/8"ø x 3 1/2" LONG BOLT, WASHER & BACKER BAR |
| E | 1 | 3/8"ø x 1 1/4" LONG BONDING BOLT WITH 1 NUT AND 2 WASHERS. |
| F | 4 | LEVELLING SHIMS. |

NOTES

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.
2. POLE SHALL BE INSTALLED PLUMB.
3. ALL POLES, ARMS AND EXTENSIONS SHALL BE SUPPLIED WITH A GALVANIZED FINISH.
4. APPLY GREASE TO ANCHOR BOLT THREADS.
5. TOUCH UP ANY SCRATCHES IN GALVANIZED SURFACES WITH COLD GALVANIZING COMPOUND.
6. BOLT, WASHERS, AND SINGLE NUT SHALL CONFORM TO ASTM F3125 Grade A325. GRADE SAE 5 BOLTS WITH THE FOLLOWING SPECIFICATIONS MAY BE SUBSTITUTED: 5/8" DIAMETER, 3" LENGTH, 2 WASHERS, AND 2 NUTS. CONNECTION INSTALLATION TO BE IN ACCORDANCE WITH "TURN-OF-NUT" METHOD SPECIFIED IN CSA S6.

NOT TO SCALE

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

| No. | Revision | Date |
|---|---|---|
| H | GENERAL REVISIONS | APR 20 |
| G | GENERAL REVISIONS | APR 17 |
| F | TYPE 1&8 FLANGE BOLTS CHANGED TO A325 | DEC 10 |
| E | 7C LUM EXTENSION CHANGED TO 7B | OCT 03 |
| D | ANTI-SEIZING LUBRICANT NOTED ON HANDHOLE BOLT | NOV 98 |

# TYPE 7 POLE INSTALLATION DETAILS (SIGNAL POLE)


Date Approved

**30/09/93 E.L.** **(Signature on File)**

Chief Highway Engineer

SPECIFICATION DRAWING No.

SP635-2.1.14

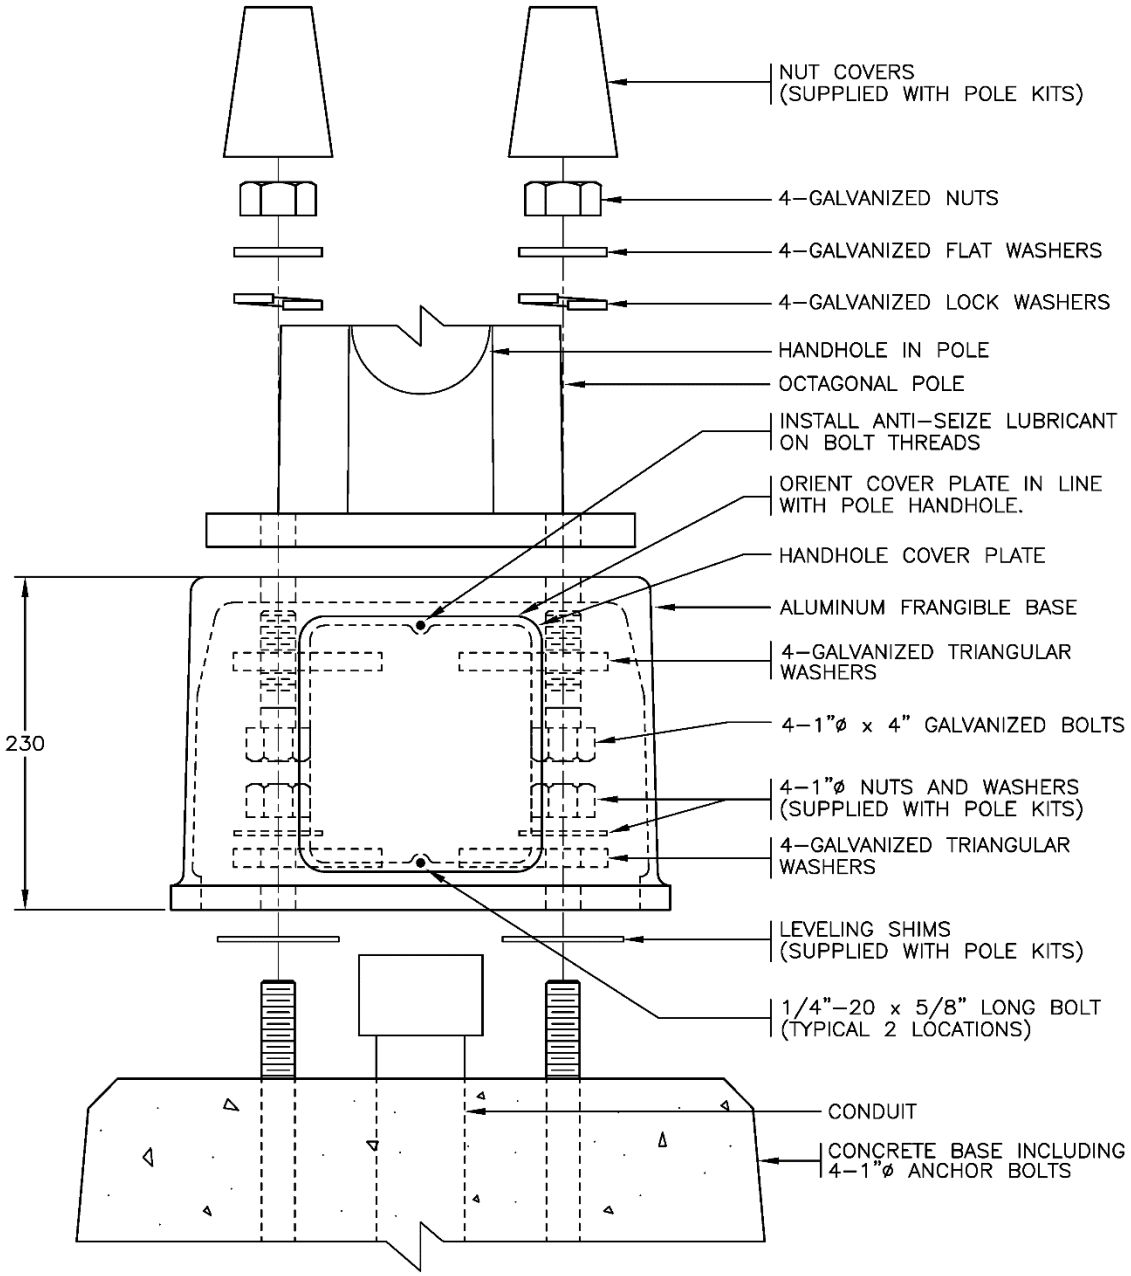


FRANGIBLE BASE ASSEMBLY

NOTES:

1. SEE STANDARD SPECIFICATIONS & SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION.

BRITISH COLUMBIA | Ministry of Transportation and Infrastructure

NOT TO SCALE

| No. | Revision | Date |
|---|---|---|
| E | GENERAL REVISIONS | APR 17 |
| D | LOCK WASHERS ADDED | SEPT 00 |
| C | ANTI–SEIZING LUBRICANT NOTED ON COVER PLATE BOLTS | NOV 98 |
| B | SPRING LOCK WASHERS REMOVED | AUG 95 |
| A | GENERAL REVISIONS | AUG 94 |

ALUMINUM FRANGIBLE BASE
FOR 9.0 m AND 11.0 m LUMINAIRE POLES

Date Approved
**30/09/93 E.L. (Signature on File)**
Chief Highway Engineer

SPECIFICATION DRAWING No.
SP635–2.1.15